
Second campus corrections

JQB terrain and rear lower floor, the building behind African Studies, PRESEC entrance, low buildings near the marked School of Performing Arts precinct, road obstructions and missing bushes.

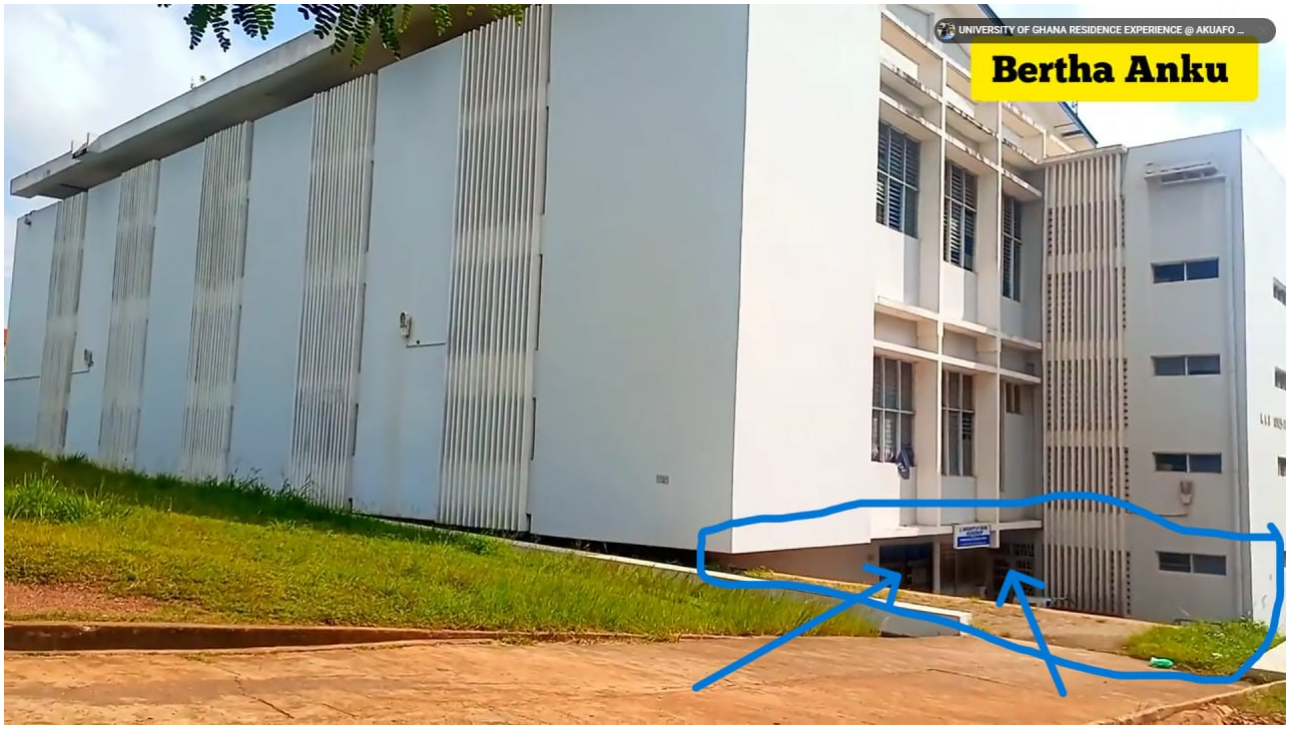

Scope and evidence

All 19 pictures are now included in the user-confirmed order. A01-A19 correspond exactly to Pictures 1-19. Picture 17 is the real satellite layout; Picture 18 is the real bush view; Picture 19 is the marked game bush comparison.

Updated comparisons: Picture 17 now grounds the low-building footprint and road-clearance corrections. Pictures 18-19 show the contrast between real dense low scrub and the game's broad empty lawn. Exact heights, hidden openings and surveyed coordinates remain unmeasured.

Mandatory geometry rule: keep JQB's structural walls vertical and its floor slabs level. Recreate the sloping ground and one exposed lower floor only at the marked rear/east bottom section. Do not tilt the whole building or add a basement entrance to the front.

This is a reconstruction instruction document, not an implemented game change. Full-resolution originals, user-confirmed local conditions and matched views control the corrections; uncertain dimensions remain provisional.

01 / Source index and numbering

A01 / Picture 1 / image(20261014-065402).png

A02 / Picture 2 / image(20261014-065438).png

A03 / Picture 3 / image(20261014-065452).png

A04 / Picture 4 / image(20261014-065502).png

A05 / Picture 5 / image(20261014-065531).png

A06 / Picture 6 / image(20261014-065536).png

A07 / Picture 7 / image(20261014-065559).png

A08 / Picture 8 / image(20261014-065608).png

A09 / Picture 9 / image(20261014-065620).png

A10 / Picture 10 / image(20261014-065648).png

A11 / Picture 11 / Screenshot 2026-10-12 213343.png

A12 / Picture 12 / image(20261014-070138).png

A13 / Picture 13 / image(20261014-070143).png

A14 / Picture 14 / image(20261014-070202).png

A15 / Picture 15 / image(20261014-070228).png

A16 / Picture 16 / image(20261014-070251).png

A17 / Picture 17 / Screenshot 2026-10-14 060752.png

A18 / Picture 18 / image(20261014-072553).png

A19 / Picture 19 / image(20261014-072713).png

Content groups: A01/A02 = raised terrain and red-earth path; A03/A04 = building behind African Studies; A05/A06 = JQB ground slope; A07/A08/A09 = rear lower-floor relationship; A10/A11 = PRESEC; A12-A15 = local game building defects; A16 = annotated game location map; A17 = real satellite layout of that zone; A18 = real roadside scrub/bush reference; A19 = current game bush comparison.

Registration: use A16 to locate the marked game region, A17 to trace actual roofs, gaps and access corridors, and A18/A19 for the vegetation target. Satellite establishes plan; the user supplies the single-storey/wooden-window requirement.

02 / Compulsory detail inspection

Open originals. Inspect full-resolution pictures, whole elevations and enlarged floor/bay/roof crops. Review adjacent references for concealed details. Screen arrows, captions, playback overlays and watermarks are annotations, not building surfaces.

Evidence ledger. Create a table of object/elevation ID, floor, bay order, feature, count, relative position/size, recess/projection, source attachment, confidence and unresolved notes. Include pillars, wall partitions, blank spans, louvres/windows, doors and roof joints.

No guessed openings. Differentiate shadows, wooden shutters, glass, corridor voids and actual doors. Do not stamp identical windows onto every face. Model verified wall divisions and preserve uninterrupted blank walls.

Floor/terrain distinction. Count occupied tiers independently from the ground profile. Sloping foreground does not mean sloping floors. Exposed lower bays at the rear do not authorize a new lower facade around the entire building.

Scope exceptions. The building behind African Studies shows two levels in A04. The single-floor instruction concerns the marked low-building area in A12-A16. Do not flatten JQB, PRESEC structures or other unrelated blocks under that rule.

Proof before completion. Deliver annotated crops and matched-angle game/reference comparisons. Audit positions floor by floor. Correct known misplaced pillars, windows, doors, divisions and roof details before claiming an elevation complete.


Evidence limits. All 19 pictures are supplied. Keep uncertain dimensions, concealed elevations and exact object correspondences provisional. Use the real satellite plan for placement and the user's explicit low-building correction for height/material requirements; do not claim satellite measures storeys.

03 / Raised ground and red-earth path

Attachment A01 / Picture 1 / image(20261014-065402).png



Attachment A02 / Picture 2 / image(20261014-065438).png

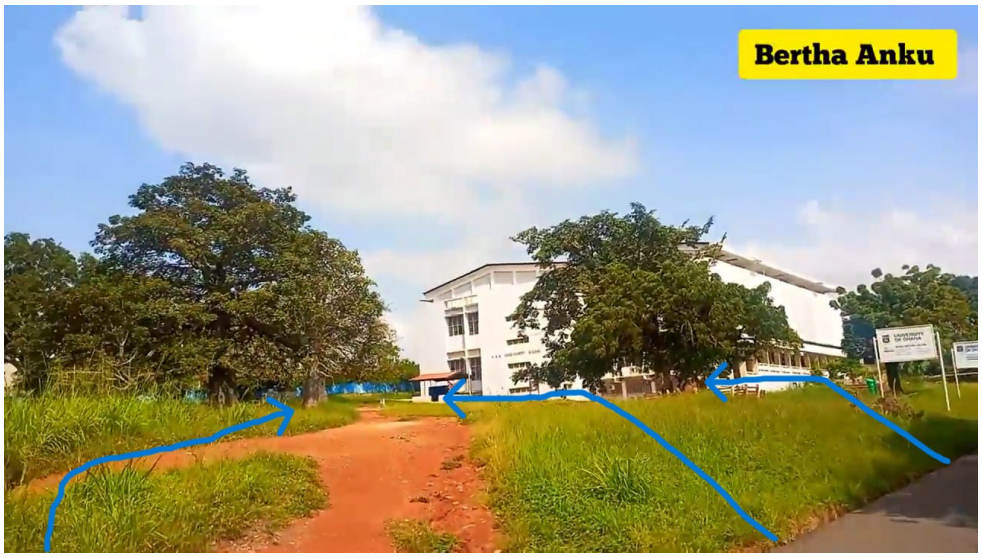

Current defect. A01 shows a pale paved strip over broadly flat-looking lawn. A02 shows a reddish earth path through grass and a raised grass-covered ground mass above the roadside level, marked by the user's blue lines.

Required correction. Replace the wrongly paved path within the marked region with a continuous red/laterite-like soil path. Form a modest rounded embankment/hill that rises from the roadside toward the interior/building grounds. Blend terrain smoothly instead of adding an isolated decorative mound.

Acceptance. At the matched A02 angle, the road-side edge lies lower than the raised interior ground, the red-earth path follows the rise and grass/bush edges are irregular. No pale paving remains on the specific path identified for replacement.

04 / Terrain and path implementation

Register first. Match JQB and the marked road-side approach in A01/A02. Establish the hill region, path endpoints and road edge in scene coordinates. Mark elevations relative to the existing road surface; exact rise and slopes are not measured by these pictures.

Coherent terrain field. Use one continuous height field or connected terrain surface for the raised approach and JQB flank. Blend the crest/upper lawn into surrounding ground and the lower edge into the road verge. Do not leave visible seams between independent mounds.

Path material. Use red-brown soil with moderate roughness, slight wear and irregular margins where grass meets the track. Keep soil distinguishable from asphalt, stone pavement and green lawn. Do not make the entire precinct one flat red texture.


Path shape. Follow the visibly worn route and its width relative to people/buildings. Keep it on the terrain, with no floating edges or sharp height discontinuities. Retain verified paving elsewhere; only replace the marked incorrect path.

Vegetation. A02 shows taller untrimmed grass at path edges and mature broadleaf trees in the wider landscape. Restore this natural composition rather than uniformly short lawn and giant repeated tree crowns.

Bicycle/ground test. Conform terrain collision and the path to the same elevation field. Ride the approach both ways; check contact, edge transitions and drainage/road clearances. No invisible step or flat collider may remain beneath the raised ground.

05 / Building behind African Studies

Attachment A03 / Picture 3 / image(20261014-065452).png

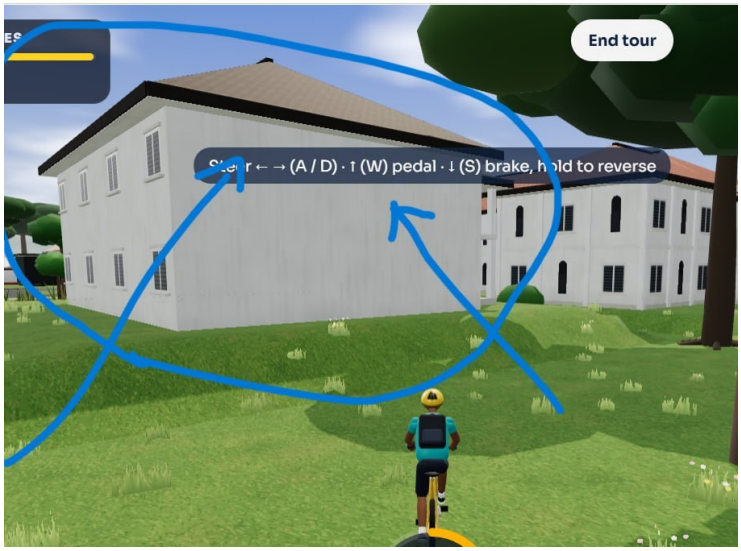

Attachment A04 / Picture 4 / image(20261014-065502).png



Current defect. A03 shows a plain white two-level block with small repeated windows, a broad blank side and a grey/brown simple roof. A04 shows a terracotta-roofed white two-level facade with larger blue/dark rectangular openings and paired arched openings, partly obscured by a tree.

Required correction. Rebuild the visible end/side arrangement, opening sizes, arch shapes, recesses and roof/eaves. Register the building behind African Studies far to the east of JQB using project data before replacing its object. Do not assume an official building name from this image.

Limit and exception. Two visible levels in A04 are evidence for this specific building. Do not apply the later single-storey rule here. The tree conceals part of the facade: hidden bays, exact counts and unseen sides must remain provisional rather than inventing repetitive windows.

06 / African Studies-side detail rules

Opening schedule. From A04 record each visible upper/lower rectangular opening and paired arches separately. Preserve left/right arrangement and vertical alignment where visible. Some openings appear blue from paint/glass/exposure; do not assert a precise glazing or shutter construction without a closer view.

Volume and roof. Keep the observed two-level white mass and warm terracotta pitched roof. Model eaves, fascia, ridge and projecting/returning parts based on visible geometry. A03's grey roof and small generic window rhythm are insufficient for the matched facade.

Ground and trees. A04 shows taller grass and a substantial broadleaf tree partly hiding the right side. Use this as a landscape cue, but do not plant the tree to conceal an inaccurate facade.

Position. Use the user's location behind African Studies/east of JQB plus surrounding scene anchors. No exact satellite position is supplied in this set; report the resolved object/footprint ID and confidence.


Acceptance. Matched A04 view reproduces the visible two-level silhouette, terracotta roof, large and arched openings, white divisions and grass/tree relationship. The placement ledger identifies every modeled visible opening and flags hidden areas.

07 / JQB: reproduce ground descent

Attachment A05 / Picture 5 / image(20261014-065531).png



Attachment A06 / Picture 6 / image(20261014-065536).png

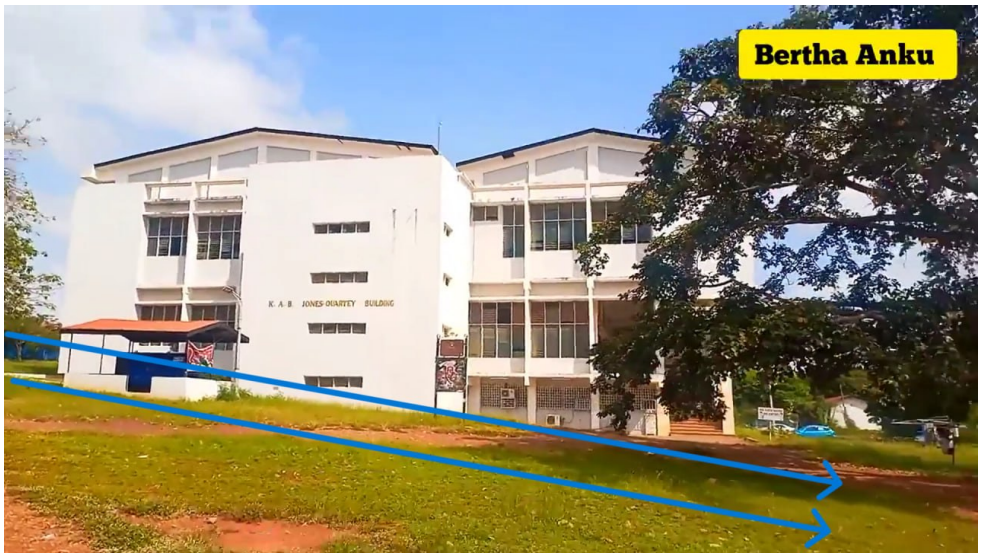

Current defect. A05 presents flat ground across the marked facade. A06's arrows identify a descending terrain relationship across this side: ground falls toward the rear/right as viewed, with changes in exposed lower facade.

Required correction. Tie the JQB foreground and flank to the raised ground corrected in A01/A02. Shape the local descent to expose the lower rear zone at the correct end. Register the actual scene direction from the matched elevation; screen-right is not a universal compass axis.


Do not tilt JQB. Keep walls vertical, floor/slab elevations level and roof planes structurally coherent. The slope is in terrain/contact line and changing facade exposure. Do not rotate the entire building to copy a slanted annotation or camera perspective.

08 / JQB rear: one lower floor

Attachment A07 / Picture 7 / image(20261014-065559).png



Attachment A08 / Picture 8 / image(20261014-065608).png

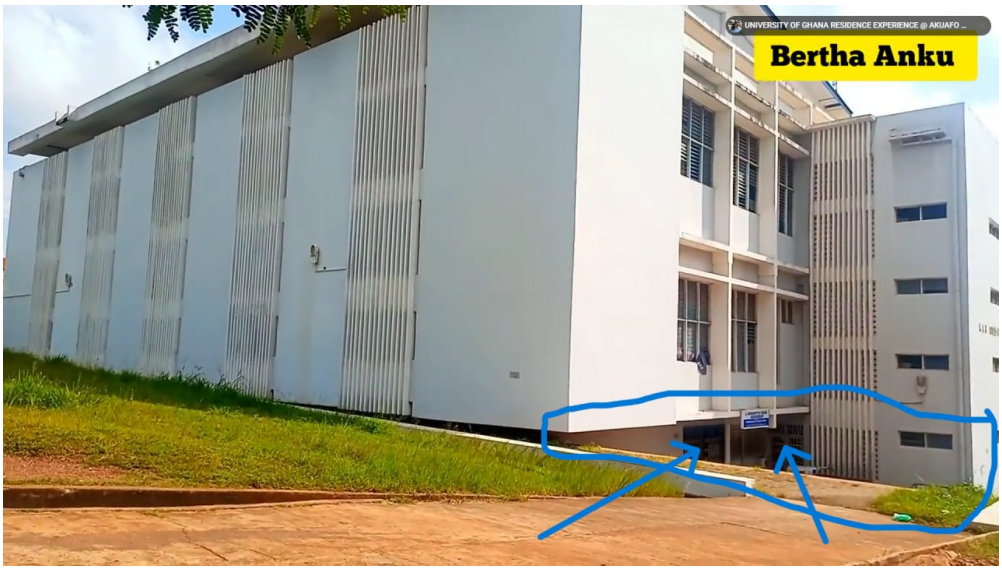

Directly visible. The marked rear corner has barred/glazed lower openings beneath the upper facade, a lower paved approach and adjacent rising grass. A08 shows the exposed lower entrance/bays beneath the windowed portion, beside a tall screened/ribbed vertical zone.

User-confirmed scope. JQB has one underground/lower floor at this rear/east bottom section only. The front must not receive a new exposed basement, extra entry or full perimeter trench.

Required model. Build the lower local volume/openings and the lower approach/terrain relationship. Preserve upper vertical bays, light wall partitions and narrow windows/ribbed screen where visible. Exact hidden internal extent and floor dimensions are not supplied.

09 / JQB game defect and excavation

Attachment A09 / Picture 9 / image(20261014-065620).png



Current defect. A09 terminates the facade on a largely continuous grass plane and lacks the exposed rear lower-floor bays/approach visible in A07/A08.

Required correction. Add the supported local lower-level volume and lower openings. Lower/reshape adjacent ground to reveal the rear bays while retaining rising lawn against other walls. Keep terrain clear of real doors/windows and upper facade partitions.

Grade envelope. Use a coherent transition from raised foreground/side ground to the lower rear access. Do not dig the entire building out, reveal a continuous invented basement or bury the observed lower entry with decorative grass.

Acceptance. A07/A08 matched views show the local lower level and its access, while the front view remains without an exposed underground storey. A09's revised view no longer shows a blank unbroken wall at the marked lower-zone location.

10 / JQB floor and collision contract

One rear lower level. Maintain a stable slab datum for the visible main floors. Place one local lower floor below them only in the user-defined rear segment; do not interpret the request as a second basement or an extra storey across the whole frontage.

Facades and screens. Count tall window/louvre bays, horizontal bands, narrow stair/service openings and ribbed/screened vertical strips from A06-A08. Reconstruct partitions in their correct bays and verify lower openings independently from upper levels.

Landform first, detail second. Construct the raised approach and falling side/rear terrain, then fit lower access and facade exposure. Do not solve the terrain by changing window heights at random, tilting floors or stepping the structural roof without evidence.

Retaining and approach. Use observed transitions and lower paving; any hidden retaining wall or staircase design is provisional unless another reference establishes it. Do not add a dramatic basement ramp or stairs purely because a lower level exists.

Physics. Synchronise facade/lower volume collision, terrain and access surface. Verify no openings are plugged by invisible colliders, no visual ground is floating and no slope intersects the doorway.


Required views. Capture front, A06 side, A07 close rear, A08 oblique rear and overhead terrain. Provide a local ground-profile diagram showing the raised approach, descent and exposed lower access, with estimated heights identified as estimates.

11 / PRESEC entrance and fountain

Attachment A10 / Picture 10 / image(20261014-065648).png



Attachment A11 / Picture 11 / Screenshot 2026-10-12 213343.png

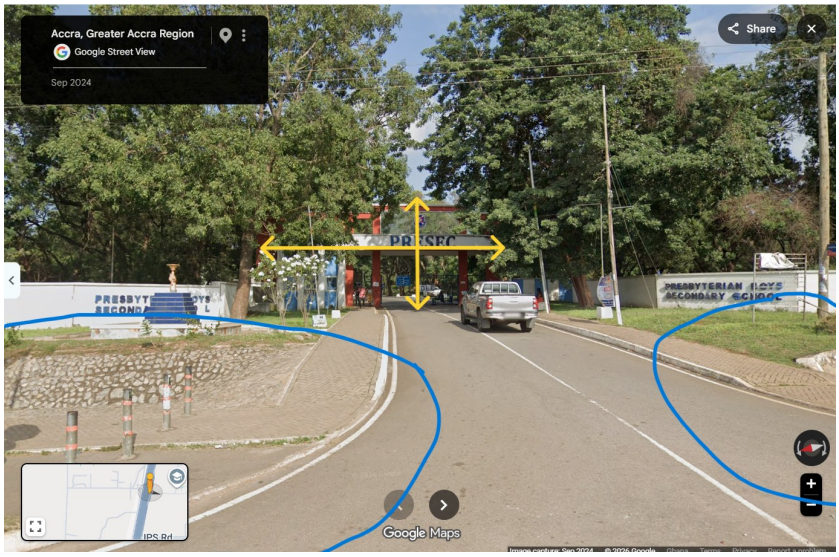

Current defect. A10 shows a compact gate and small straight-edged paved/flank arrangements. A11 shows a taller/wider entrance in the user's correction, curved kerb/approach edges and a broad stone-faced terrace/plinth supporting the fountain on the left.

Required correction. Increase the gate's clear height and width proportionately using the real reference; reconstruct the stone-clad platform/fountain housing, the curved approach, paving and roadway relationship. Avoid widening the gate into the neighboring footway or shifting the road arbitrarily.

Evidence limit. A11 is a perspective Street View with trees/traffic obscuring parts of the entrance. Use matched camera scale and visible landmarks, not the pixel length of arrows as metre measurements. Exact dimensions and fountain construction remain unmeasured.

12 / PRESEC detailed requirements

Gate geometry. Compare red posts, crossbeam, clear opening, crest/name band and relation to boundary walls. Widen and raise the supported proportions modestly to match A11; do not use an arbitrary fixed percentage as if surveyed.

Fountain platform. Place the fountain above/on the left raised stone-faced slab/terrace as seen. Model its retaining face, top pad, edges and planting relation. Apply irregular light/grey rubble-stone texture and mortar cues instead of a small generic smooth concrete box.

Road and kerb. Rebuild the approach curvature, junction/road edges, visible pale road markings and smooth carriageway through the gate. Preserve the main-road alignment. Avoid abrupt right-angle pavement triangles where the reference has rounded edges.

Pavement. Trace paved strips around the lawn/terrace and the right-side approach. Use visible block/paver appearance and separate paving from asphalt, grass and stone wall. Keep curb height/collision continuous.

Landscaping. A11 has substantial mature foliage and grass islands around the entry. Restore appropriate surrounding canopy without hiding the gate, fountain or crossing/road clearance. Do not infer every obscured tree position.

Acceptance. At a matched road approach view, gate scale, clear passage, left stone platform/fountain, curved kerbs, paving and boundary geometry align. Ride through the gate and approach; confirm no posts, sign objects or fountain colliders block the carriageway.

13 / Low-building defects: overview

Attachment A12 / Picture 12 / image(20261014-070138).png



Attachment A13 / Picture 13 / image(20261014-070143).png



Observed defects. The marked views include repeated two-level small blocks, window patterns and positions that differ from the user's intended low-building area. Some buildings approach or occupy road corridors in later views.

Required area-wide audit. Resolve every marked small building around the A16 blue-circled reference precinct and red-marked side/back zones. Make in-scope blocks single-storey, white with a wine/reddish base and wooden window/shutter construction. Fix all affected assets, not just the nearest circled example.


Boundary caution. The prominent blue-circled reference block in A16 is a location anchor, not automatic proof every neighboring major building must be reduced. The one-floor instruction applies to the low-building targets in the described surrounding area. Protect unrelated verified landmarks.

14 / Remove building-road conflicts

Attachment A14 / Picture 14 / image(20261014-070202).png



Attachment A15 / Picture 15 / image(20261014-070228).png

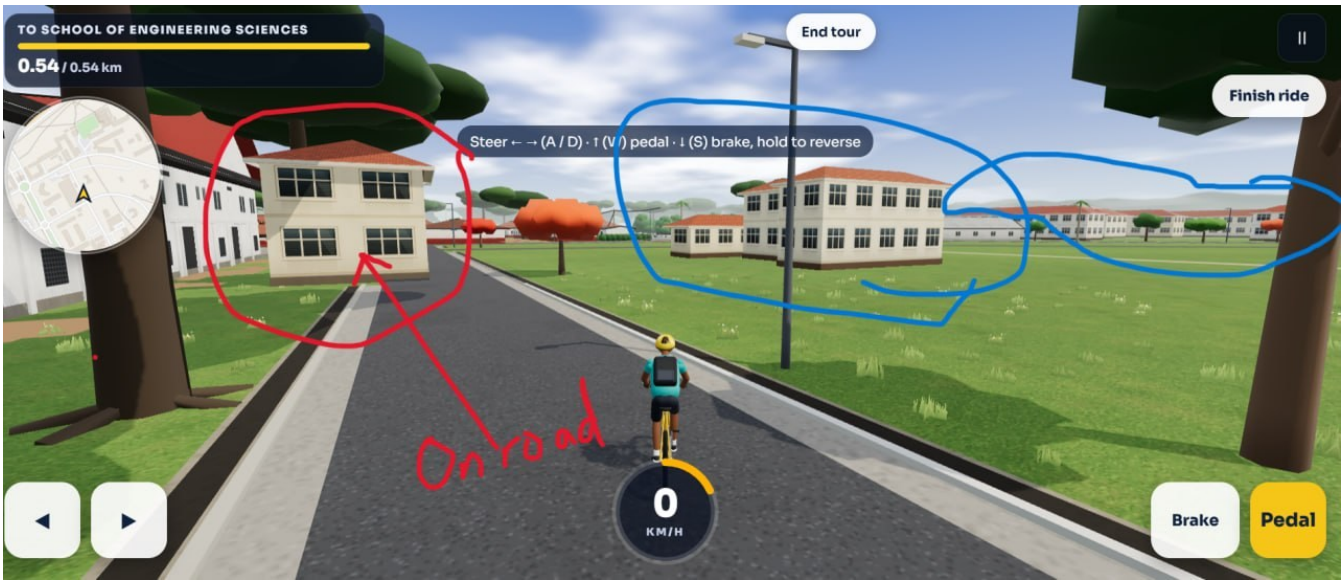


Current defect. The red-marked small blocks occupy the road alignment/passage in these game views. A15 explicitly labels the obstruction "On road". Merely hiding a window or repainting the building will not clear the route.

Required correction. Match each obstructing object to a real footprint, then move/rebuild the building to its evidenced site with proper setback. Remove wall, roof overhang and collision intrusion into the road and walkway. Do not bulldoze a verified road or reroute it around an invented placement.

Real-map rule. Use A17 to match actual roof footprints, offsets and access corridors before relocating A14/A15 targets. Register it against A16 using the large blue-circled roof and road junctions. Clear accidental intrusion without shifting a verified road; report uncertain object matches.

15 / Area registration and low-block rules

Attachment A16 / Picture 16 / image(20261014-070251).png

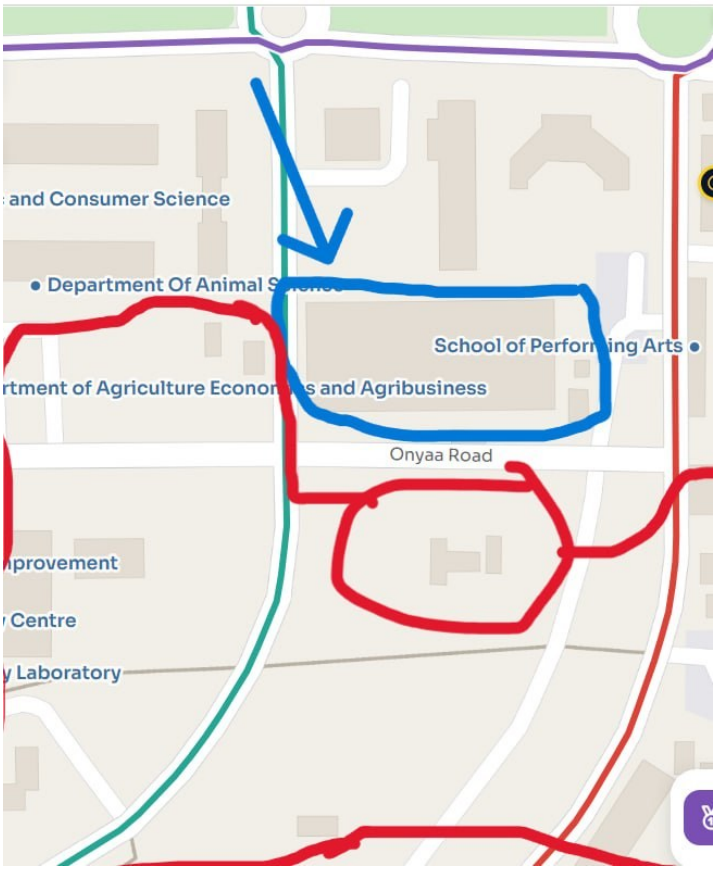

Location key. A16 shows a blue-circled block near the School of Performing Arts and neighboring map labels, plus red-marked side/back routes and areas near Onyaa Road. Use this to identify scene objects and the corresponding A12-A15 viewpoints; map pins are locators, not exact building boundaries.

Appearance. For in-scope low blocks: one ground-level occupied floor, white walls, wine/reddish base band on returning faces, pitched roofs where supported, and wooden panels/shutters/louvres rather than generic glossy glass facade grids.

Placement. Preserve actual lanes, walkways, yard gaps and separate small roof footprints. A16 is the game's current plan. Register its road and large roof anchor to A17 before tracing the real small roofs and moving buildings; do not accept existing game polygons as real placement evidence.

Acceptance. At overhead and A12-A15 angles, no in-scope extra storey remains; base colours and wooden openings agree with the requirement; all road/footway corridors are clear of buildings, roofs and colliders. List uncertain object-to-roof matches explicitly.

16 / Real layout: placement evidence

Attachment A17 / Picture 17 / Screenshot 2026-10-14 060752.png



Register the blue anchor. Match the large elongated terracotta roof in the blue outline to the blue-circled game anchor in A16. Use E. A. Boateng Road, adjoining road edges and junctions as secondary anchors. Confirm rotation/scale and do not mirror the site.

Read the red zone. The red-marked area contains separate small roof masses, the Child Study Centre vicinity, irregular yard/soil gaps, access routes and vegetation. Preserve these separate footprints and setbacks; do not replace the region with repeated two-level blocks or roofs stretched across roads.

Height and openings. The user confirms one-floor buildings and wooden windows for the in-scope small targets. A17 corroborates roof positions, not exact storey height or window placement. Do not apply the low-block rule indiscriminately to the large blue anchor or unrelated buildings.


Acceptance. Overlay registered A17 roof/road outlines on the corrected game overhead view. Verify each moved target in A12-A15 has a matched real footprint and clear road/footway corridor, including roof overhang and collision bounds.

17 / Bushes: real and game comparison

Attachment A18 / Picture 18 / image(20261014-072553).png



Attachment A19 / Picture 19 / image(20261014-072713).png

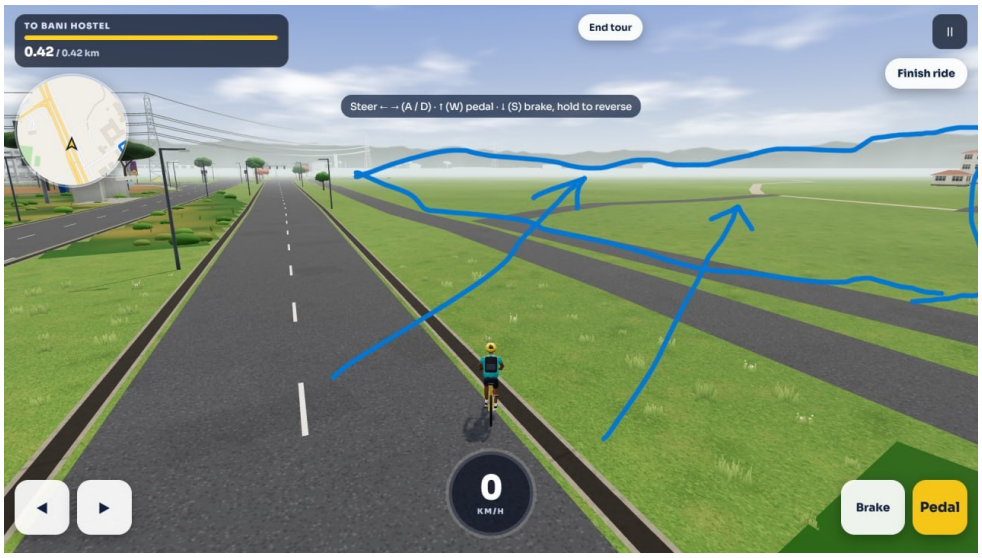

Verified mismatch. A18 shows dense low scrub, uneven grass, small scattered trees and ground variation behind a paved roadside strip. In A19 the blue-marked region is broad near-empty short lawn with very little shrub volume. Restore the missing bush masses rather than adding a line of giant trees.

Required correction. Register the matching road-side area using road alignment, paths, utilities and distant building context; the cameras are not identical. Populate the marked ground with irregular low-to-medium shrub patches, taller grass and limited scattered trees while preserving paths and road-edge clearance.

Acceptance. From a matched A18 view, the corrected region has layered low foliage, broken natural silhouettes, varied density and visible route gaps. Use shared-material volumetric bush chunks/instancing, and keep collision deliberate so bushes do not block accessible routes.

18 / Validation of all supplied views

Raised approach. Match A01/A02 with raised interior ground, red-earth path and irregular grass/bush edges. Show that path/terrain/collider heights agree.

African Studies-side building. Match A03/A04 with the correct visible two-level facade, rectangular/arched openings and terracotta roof. Document concealed bays and resolved object identity.

JQB. Match A05-A09 with descending ground and one exposed rear lower floor. Front view has no newly exposed basement. Provide terrain sections; prove the building has not been tilted.

PRESEC. Match A10/A11 with increased gate scale, left stone-faced fountain terrace, curved road/kerb geometry and correct paving. Demonstrate unobstructed passage.

Low-building area. Audit every target in A12-A16 for one storey, white/wine paint, wooden openings and road clearance. Include collision bounds in an overhead debug view.

Bush area. Compare A18 with corrected A19 from a matched camera. Demonstrate low dense scrub, uneven grass and limited trees, while preserving roadside paving and paths.

Real plan and uncertainty. All 19 pictures are now incorporated. Use A17 for placement verification, A18/A19 for foliage comparison and full-resolution crops for architectural detail. Exact dimensions, hidden faces and ambiguous scene object matches remain estimates to resolve.

19 / Consolidated Claude prompt: 1/3

Task. Implement this separate second-correction brief in LEGONRUSH. Read all sections and use A01-A19 in exact user-confirmed picture order. A17 is the real layout map; A18 is the real bush view; A19 is the game vegetation comparison.

Mandatory first step. Inspect full-resolution crops and create a building/elevation/floor/bay ledger before placing details. Record pillars, wall divisions, blank spans, windows, doors, opening states and roof junctions. Verify each feature against sources; no invented openings or generic facade stamping.

A01/A02. Replace the marked pale paved path with red-earth soil and form the modest raised grass-covered approach above road level. Connect it into the local JQB ground field and preserve verified pavement outside the marked replacement area.

A03/A04. Correct the building behind African Studies far east of JQB: retain the two visible levels, terracotta roof, white wall geometry, larger rectangular openings and paired arches. Confirm footprint identity, preserve visible divisions and flag hidden details.

A05/A06. Recreate descending ground along the indicated JQB flank as connected to the raised approach. Keep structural walls vertical and floor slabs level. Do not rotate the building to reproduce a slanted screen arrow.

A07/A08/A09. Add exactly one supported rear/east lower floor and expose its actual lower bays/entry through appropriate lower ground and approach paving. Do not add an exposed basement or extra entrances at the front or all around JQB.

20 / Consolidated Claude prompt: 2/3

JQB facade and terrain. Reconcile upper window/louvre bays, partitions, ribbed screen zones and lower openings with the references. Preserve a coherent height field and lower access. Update terrain and all building/path collisions together, with no buried entry, floating lawn or flat collider.

A10/A11 PRESEC. Increase gate clear height/width to the real proportions, rebuild the raised left stone-faced fountain platform and correct curved road edges, kerbs, paved strips, boundary and surrounding mature vegetation. Keep the main road/gate passage open and rideable.

A12-A16 low-block zone. Audit the full described side/back area around the mapped anchor. Make every in-scope low target single-storey with white walls, wine/reddish bases and wooden openings. Remove extra structural/window tiers and rebuild roofs at the corrected height.

Road obstructions. Correct each red-marked building that blocks the lane. Resolve the actual footprint before moving it; remove mesh/roof/collider overlap with road or footway. Do not reroute a verified road to retain an incorrect building placement.

A17 real map. Register A16 game map to A17 real satellite using the large blue-circled roof, E. A. Boateng Road and junctions. Match every low target to an actual small roof, retain yards/gaps, correct setbacks and remove road/footway/collider intrusion. Document uncertain object matches; satellite does not establish window detail.

A18/A19 bushes. A19 visibly substitutes near-empty short lawn for A18's dense low scrub. Restore layered irregular shrub masses, taller grasses and limited scattered trees in the blue-marked region. Register a matched camera, preserve paths/roadside clearance and verify foliage volume and coverage.

21 / Consolidated Claude prompt: 3/3

Implement at the source. Edit owning procedural/map/scene records so fixes survive regeneration. Keep stable object IDs, remove stale duplicate meshes/upper-floor colliders, and avoid unintended edits to unrelated campus precincts.

Required proof. Deliver annotated original crops, placement ledger, matched reference/game angles, overhead road-clearance views and JQB terrain sections. Record modeled versus observed opening counts, floor locations, partitions and roof breaks.

Required tests. Ride the red-earth approach, JQB flank/rear-access vicinity, PRESEC gate/curved approach and previously obstructed lanes. Check collider contact, grade continuity, camera clipping, overlaps and boundary clearance. Report only tests actually run.

Rejection conditions. Incorrectly tilted JQB; an exposed front basement; more than one rear lower floor; blank rear wall where lower bays should exist; generic African Studies-side openings; undersized PRESEC gate; wrong fountain platform; extra low-zone storeys; road-blocking buildings/colliders; or a bare-lawn bush target must be corrected before completion.

Honest reporting. State modified files/object IDs, corrected defects, verification screenshots, actual test results, performance effects and unresolved assumptions. Do not invent metre values, floor extents, unseen openings, exact tree counts or surveyed placement precision.

Completion standard. All adequately documented regions must pass their comparison and placement checks. Uncertain dimensions and concealed areas stay explicitly provisional. Recheck after reload/regeneration and correct every known unexplained geometry or material mismatch before marking a verified region complete.