
Noguchi entrance: clear the approach

Required correction: move the three red-arrowed internal game supports away from the front approach and into the intended side support rows. Extend the canopy side depth forward by approximately 25% to accommodate the requested four support positions with open gaps. Use slender rectangular blade-like supports, not bulky square posts.

Picture 1 / current game photo_2026-10-14_20-18-49.jpg

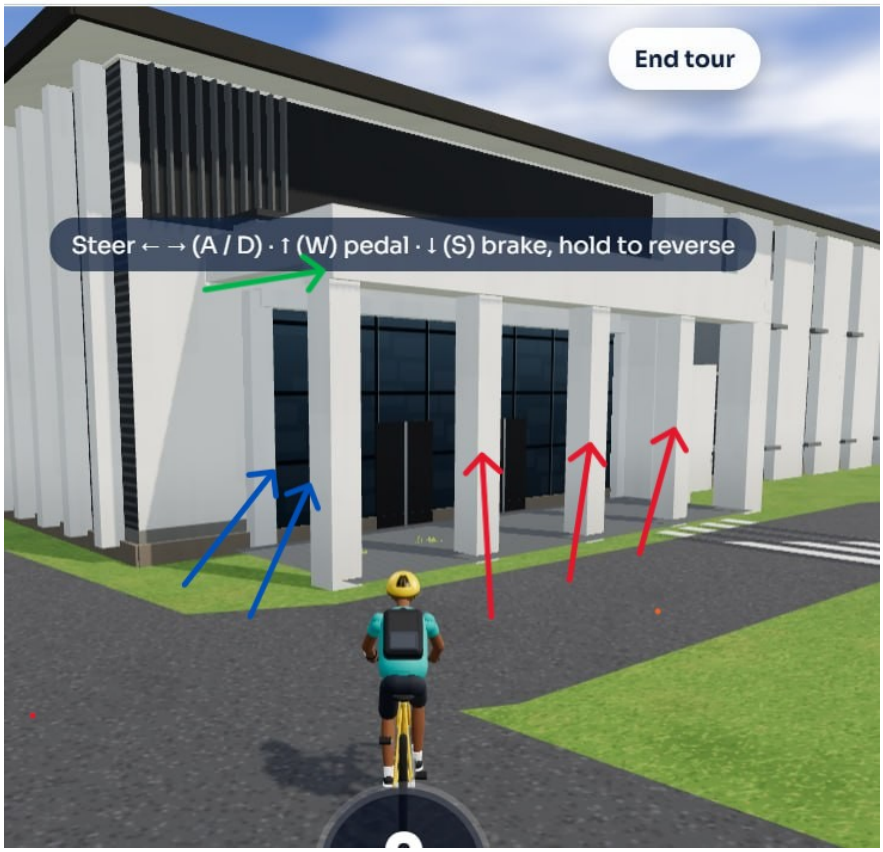


Primary failure. The red-arrowed supports read as a row across the entrance frontage, interrupting the route toward the doors. Their placement must change in plan; reducing thickness alone will not correct it.

Target. Side-aligned supports with a clear central approach beneath the canopy, matching Picture 2. Preserve the outer portal ends where verified; do not remove every vertical member indiscriminately.

This focused brief supplements the previous Noguchi correction. Its side-row placement and modest forward-extension instructions take priority over any earlier generic entrance support layout. No exact site dimensions or hidden-face measurements are claimed.

01 / Real target and support details

Picture 2 / target Screenshot 2026-10-14 191940-REAL WORLD(1).png

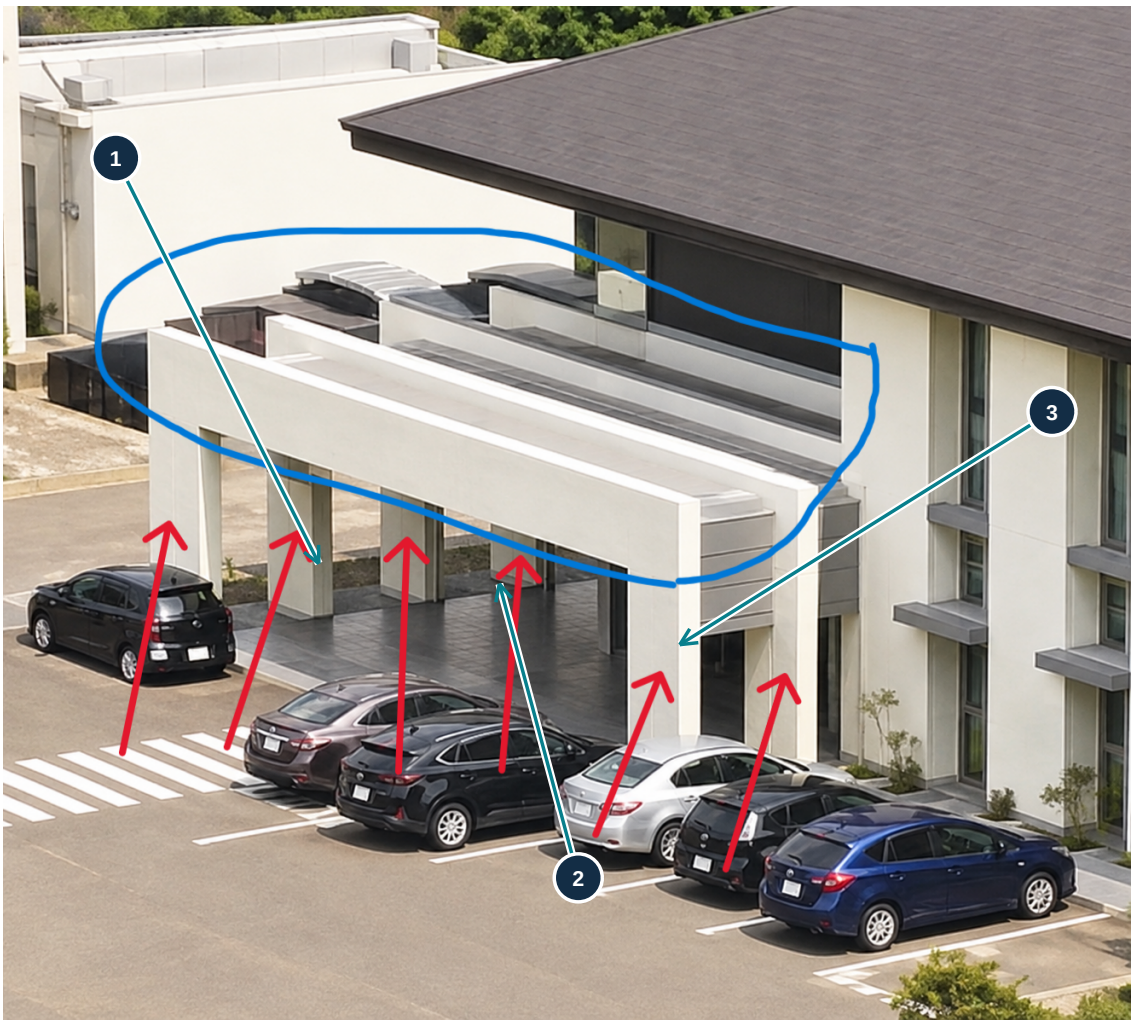

1 / Side support depth. Read the supports as part of successive canopy frames extending toward/away from the facade, not a generic equally spaced row across the entrance opening. Side placement must be checked in plan.


2 / Open passage. Keep the route through the canopy to the recessed entrance open. Real gaps must be modeled as empty space, not dark textures on a continuous wall.

3 / Outer portal. The main white front frame and its substantial end uprights remain distinct from the thinner intermediate supports. Do not make all members identical or mistake a broad outer frame end for an internal pillar.

The user requests four support positions along the corrected side arrangement. Arrow count in the photograph does not establish four supports on each side independently: prepare a labeled side-row ledger and verify the opposite side before duplicating it.

02 / Slender supports, not square posts

Native-resolution crop: the visible intermediate members read as thin rectangular/blade-like supports with different apparent front and side widths. Perspective and shadows affect those widths.

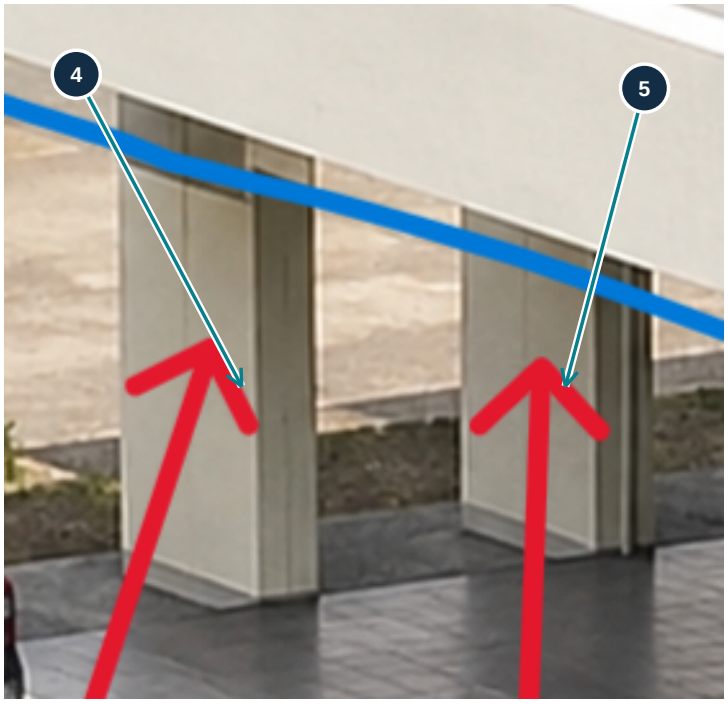

4 and 5 / Shape. Use a rectangular section with a narrow exposed edge and a longer depth aligned to the canopy frame. The photo does not support substituting round cylindrical columns. Slender does not mean circular.

Thickness. Reduce the oversized game-post thickness to match the visible target proportions. Model width and depth separately, using the crop and oblique reference; do not scale every support uniformly until it looks thin from only one camera.


Orientation. Align the blade-like support with its frame and side row. A thin member rotated 90 degrees may still present a broad obstructing face across the approach.

Connections. Keep support bases on the actual entrance paving and heads joined to the supported canopy member. Preserve original frame spacing and roof layers, correcting their plan depth coherently.

Materials. Use the pale off-white finish and supported darker trim/shadows. Do not replace the support with a glass pane, black slab or a fake shadow stripe.

03 / Placement: a plan-based correction

Conceptual plan / user-requested side-row layout, not a measured survey. Four positions are shown on each side only as a paired-row implementation concept; verify the far-side count against the reference before duplication.

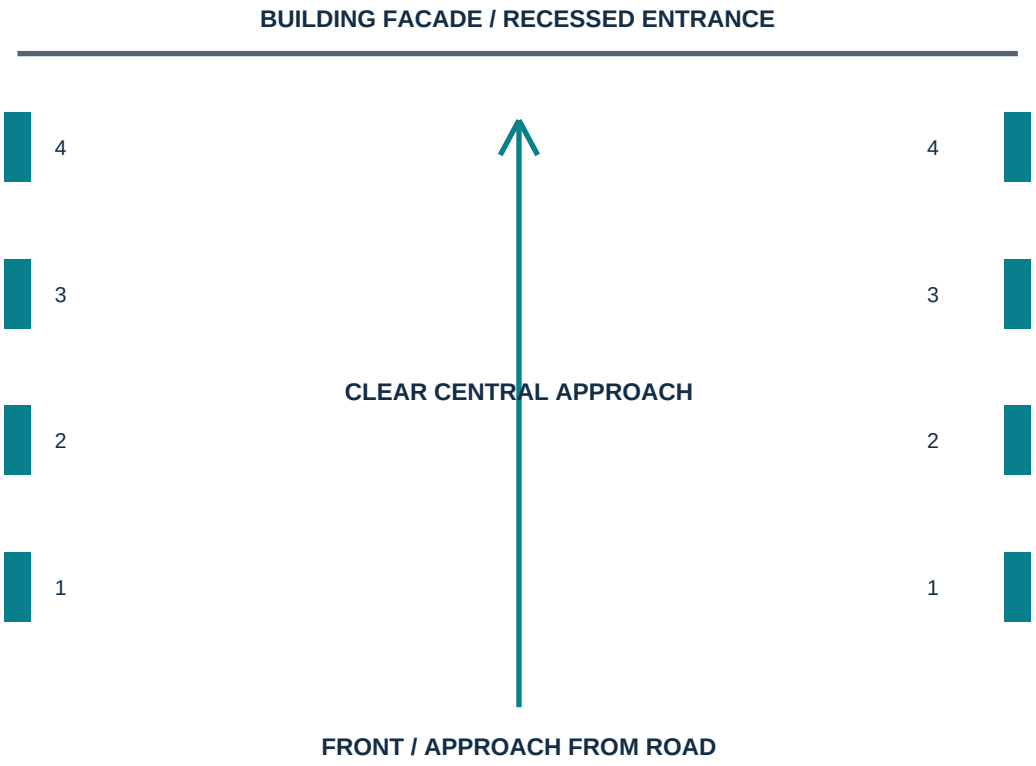

Rows run front-to-back. Place supports along the two side boundaries of the canopy passage. Do not distribute four internal supports left-to-right across the front opening.

Keep approach alignment. Register the path centerline to the actual entrance/door opening. A plan corridor that misses the door or terminates at a wall fails.

Separate the outer frame. Retain confirmed front portal end uprights outside the clear approach. Do not count these automatically as additional intermediate supports or stack duplicate posts at a shared position.

Four-position rule. Label S1-S4 along each verified side row. Confirm whether frame-end uprights occupy an intended position before counting or instancing. Do not invent an extra fourth post beside an existing endpoint.

04 / Approximately 25% forward extension

Interpretation: the requested side width means the canopy side's front-to-back depth/projection. Increase that dimension toward the approach by about 25%. Do not widen the entire laboratory frontage or make every dimension 25% larger.

Measure the existing dimension. Record D_old: rear canopy connection at the building to front canopy edge, along the local forward axis. Set the initial target D_new = 1.25 x D_old. The added forward projection is 0.25 x D_old.

Anchor the rear. Keep the building-side canopy connection and entrance opening fixed. Move the front edge forward by the added depth. Do not split the expansion equally forward/backward or shift the doors backward into the laboratory.

Extend a coordinated assembly. Adjust side frame/roof depth, support-row positions and necessary paving coverage together. Keep portal elevations and the reference roof-layer relationships coherent. Avoid floating roof strips or stretched square columns.

Place four positions. With actual support thicknesses and verified end setbacks, fit four support positions along the corrected depth. Use the source layout as the main spacing guide. Do not bunch posts at the front while leaving the rear unsupported.

Spacing ledger. Record row depth, each support center, thickness along the row and every clear gap. For a uniform provisional layout with center spacing s and support thickness t, clear internal gap g = s - t. Resolve real nonuniform spacing from the reference before accepting the result.

Preserve frontage width. Leave the central opening width at its supported value. If a separate width correction is needed to match the photograph, document it explicitly rather than folding it into this 25% depth change.

Check the road edge. The forward extension must not place supports, paving or colliders into the traffic route. Confirm parking/driveway clearance. If 1.25 x D_old conflicts with the mapped road, identify that conflict rather than silently shrinking or distorting the correction.

The 25% change is the user's requested starting adjustment, not a measurement derived from the photograph. Record actual before/after project values and the view used to verify them.

05 / Compulsory inspection and checks

Before editing. Open both source files at native resolution. Inspect the support edges, canopy side returns, front portal, gaps and door alignment. Produce a top-view overlay identifying the three wrong game objects, intended side rows, four positions, clear approach and forward extension.

Evidence ledger. Record object ID, local/world axis, row, support position, section width/depth, rotation, base/head elevation, source crop, evidence confidence and gap to its neighbors. Distinguish intermediate supports from outer frame uprights.

Source correction. Change the owning mesh/procedural definition. Relocate or replace the three wrong supports; remove their old geometry and collision shapes. Do not add a second correct row while leaving the original obstruction invisible.

Geometry check. Verify support blades in front, side and oblique views. They must not become square posts, circular columns, walls or broad plates spanning the entry. Check actual head connections after extending the canopy.

Clear-path check. Inspect in plan and at pedestrian/bicycle height. Test the continuous approach from outside the canopy to the doors, without internal supports crossing it. Use the existing game movement envelope for the actual collision check.

Regression check. Verify canopy roof layering from the previous brief, facade/door locations, paving continuity, parking/road clearance and correct reload/regeneration behavior.

Required proof. Provide before/after top, frontal and matched oblique images, support ledger, D_old/D_new values, changed files/object IDs and tests actually run. An attractive frontal screenshot alone cannot prove the pillars moved to the correct side rows.

Fail conditions: three old supports remain across the passage; square internal posts remain; depth increased in the wrong axis; roof extended without supports/paving; a continuous side wall replaces open gaps; duplicated collisions block access; four-post count is guessed from arrows.

06 / Claude prompt: correction details

Provide this entire PDF and both original images. Copy this page and page 8 together.

Task. Correct Noguchi entrance supports in LEGONRUSH. Picture 1 is current game; Picture 2 is the target. The three red-arrowed internal posts are incorrectly placed across the front approach. Relocate/reconstruct the intended supports along the canopy sides, keeping the central path to the entrance clear.

Mandatory study. Follow page 6 before editing. Zoom original images and trace support rows, individual widths/depths, open gaps, front portal ends, roof frames and doors. Produce a top-view placement overlay and feature ledger. Never equate a red arrow with one identical pillar.

Forward extension. Measure canopy side depth D_old along its front-to-back axis. Start with D_new = 1.25 x D_old and extend the front edge forward by 0.25 x D_old, with the rear building connection fixed. This is a modest side-depth change, not a 25% enlargement of the building, entrance width, height or every mesh.

Four support positions. Fit the user-requested four positions along the corrected side arrangement with appropriate open gaps. Label S1-S4 and distinguish end-frame uprights from intermediate members. Verify the opposite side before copying a four-support row there; do not invent duplicate posts at shared endpoints.

Correct section. Use slender rectangular blade-like intermediate supports with separate section width/depth and correct rotation. The supplied real image does not establish circular columns. Avoid bulky square-section posts and broad faces turned across the passage.

Coordinated structure. Extend canopy frames/roof and supporting side arrangement coherently, including supported paving adjustments. Keep doors and building connection fixed. Preserve the real layered canopy from the earlier Noguchi brief, not the incorrect generic stepped roof.

07 / Claude prompt: completion criteria

Modify the real source. Find and edit the responsible mesh/procedural module. Remove or relocate the three wrong front posts and their colliders. Avoid a decorative corrected shell over stale geometry. Keep legitimate outer portal uprights separate and maintain evidenced open side bays.

Placement proof. Submit before/after plan views showing side rows running front-to-back and a continuous clear central approach to the doors. Include frontal and oblique views that confirm the supports' thin section, orientation, spacing and roof connections.

Quantify the adjustment. Report D_old, D_new, the local forward axis, added projection and actual support coordinates. Distinguish the user's approximate 25% target from photographic measurements. If the extension conflicts with a road boundary, disclose the conflict and show the layout constraint.

Access and collisions. Check no visible or invisible post/wall intersects the central approach. Validate game movement through the relevant approach, canopy head/base junctions, parking/road clearance, and regeneration/reload. Report only checks actually performed.

Acceptance. All three wrongly located posts have been corrected at their source. Verified side arrangement has four intended positions with clear gaps; central access is unobstructed. Internal members are slender rectangular supports; the front portal remains coherent. Canopy side depth has the requested approximately 25% forward change without a global building enlargement.

Required response. List changed files and stable object IDs, completed ledger, dimension changes, matched renders and actual check results. Explicitly note unresolved far-side count, concealed dimensions or details. Do not claim completion while a support still blocks the entrance or the layout remains unverified.

Scope and priority: this is a focused follow-up to the Noguchi correction. It refines the entrance support plan and side projection. It does not replace the separate tower, signed end-block or one-floor neighboring-building instructions.