
Noguchi: correct object identities

Purpose: give Claude a precise reconstruction brief for the seven supplied images. Correct the tall slim tower, the broad signed end block, the low neighboring building, and the entrance canopy/support system. These are separate objects with separate silhouettes.

Picture 1 / Screenshot 2026-10-14 190905.png

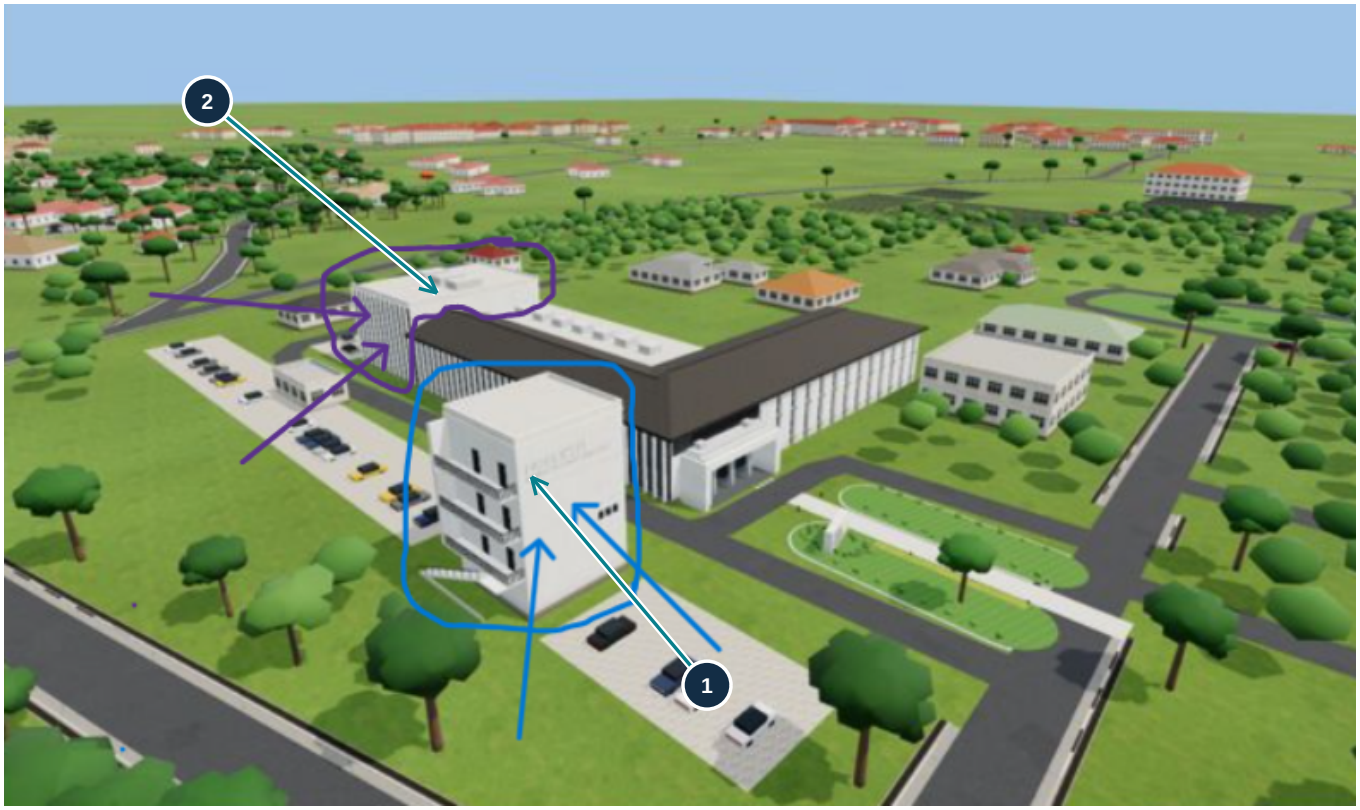

1 / T01: blue-marked position. Replace the broad game block at this site with the tall narrow tower shown in Pictures 2 and 4. A stretched version of the broad block is not sufficient.

2 / B01: violet-marked section. Restore the broad signed building/end-block identity here. Picture 3 supplies the requested signed-face appearance; Picture 4 supplies the contextual position.

Separate B02. The yellow-marked single-floor neighbor in Pictures 4 and 7 is a third structure. Retain its low footprint and relation to the tower and laboratory.

Evidence basis: direct inspection of all seven supplied files plus the user's placement instructions. Exact dimensions, concealed faces and structural engineering are not established. This PDF is a correction specification, not proof that the game has been changed.

01 / Source map and reading rules

Picture 1 / game overview. Blue marks the incorrect broad object occupying the tower site; violet identifies the section assigned to the broad end-block correction.

Picture 2 / real-world tower view. Primary tower silhouette, wall panels, open vertical bays, horizontal landings, railings and top termination. Also shows the two-level main laboratory and its dark pitched roof.

Picture 3 / signed-face detail. Use the supplied close view to identify the broad signed end face, parapet line, three small openings and projecting railed landings. Its image appearance is rendered; do not treat it as independently measured photographic evidence.

Picture 4 / contextual aerial photograph. Blue confirms the detached slim tower; violet confirms the broad end block behind the long laboratory wing; yellow identifies the low neighbor beside the tower.

Picture 5 / game entrance. Shows stepped, simplified roof geometry and excessively broad solid side treatment. Some inner columns already exist; audit their positions rather than claiming every support is absent.

Picture 6 / real entrance close-up. Primary canopy/support target: overlapping rectangular portal frames, dark roof surfaces, differentiated edges, open bays and a recessed entrance.

Picture 7 / low neighbor crop. Yellow outline shows the broad low white structure, flat roof/parapet and service details. Use Picture 4 to locate it; the crop alone cannot establish its full concealed footprint.

Interpretation rule: the roof comparison is Picture 5 game versus Picture 6 real. The user's repeated reference to Picture 5 as the desired roof is interpreted in that comparison context. Current blue/violet/yellow assignments govern these corrections; do not preserve a conflicting earlier object identity.

Mandatory inspection: open originals, zoom individual features and record an evidence ledger before editing. Colored outlines identify targets; they are not measured outlines or accurate corner coordinates.

02 / Tower: slender, open-sided form

Picture 2 / Screenshot 2026-10-14 142935.png



3 / Vertical wall blades and top. The tower rises well above the laboratory roof. It has a narrow footprint and tall pale wall planes with unequal visible top terminations. Preserve the sharp upright silhouette, top details and thin mast visible in this view.

4 / Open side and landings. Dark projecting horizontal landing/slab edges interrupt an exposed vertical side. Railings and recessed illuminated surfaces are visible between slabs. Do not replace these with stacked generic room windows on a closed box.

5 / Solid wall face. The broad visible blade reads largely as a continuous pale wall with subtle horizontal joints. Avoid adding arbitrary rows of openings, lettering or balconies to this face.

Four prominent dark horizontal landing edges are readable in this photograph. Use a landing-by-landing ledger and Picture 4 to verify the layout; do not infer a conventional four-storey occupied building or invent unseen levels from this count.

03 / Tower: geometry and placement

Object replacement. Locate the source object or procedural definition responsible for the blue-circled block in Picture 1. Replace its broad occupied-building geometry with a custom narrow tower assembly. Remove stale duplicated geometry and corresponding old collisions.

Shape parameters. Record footprint width/depth, total height, blade thickness, blade spacing, landing elevations/projection, railing height and top profile. Treat numeric values as calibrated estimates until site-scale evidence exists.

Proportion calibration. Use Picture 2 to match tower height relative to laboratory roof height and tower width relative to that height. Use Picture 4 for footprint, rotation and separation. Match camera perspective before judging pixel ratios.

Placement. Keep T01 at the user-assigned blue site. Confirm its position against the entrance, driveway, landscape edge and B02 using Picture 4. Do not attach it to the roof of the laboratory or move B01 into this site.


Open construction. Model wall blades, slab edges and railings as separate components. Preserve real negative spaces and depths. Dark bays need geometry and shadow; a dark painted rectangle on a closed wall cannot substitute for an open bay.

Materials. Match pale off-white wall finishes and darker slab/railing details. Warm light in Picture 2 is a lighting condition, not a reason to paint the tower yellow. Picture 4 supports daylight comparison.

Unseen details. Do not assume the tower's engineering function, internal stair plan or hidden-face openings. Record each unseen element as unresolved and avoid decorative additions.


Pass condition: the corrected object reads immediately as a tall slim tower in both ground-level and aerial views. It must not read as the broad signed block merely raised vertically.

Tower native-resolution detail: preserve blade edges, open landings and the largely blank solid face.



04 / Broad end block: correct identity

Picture 3 / Screenshot 2026-10-14 191157.png

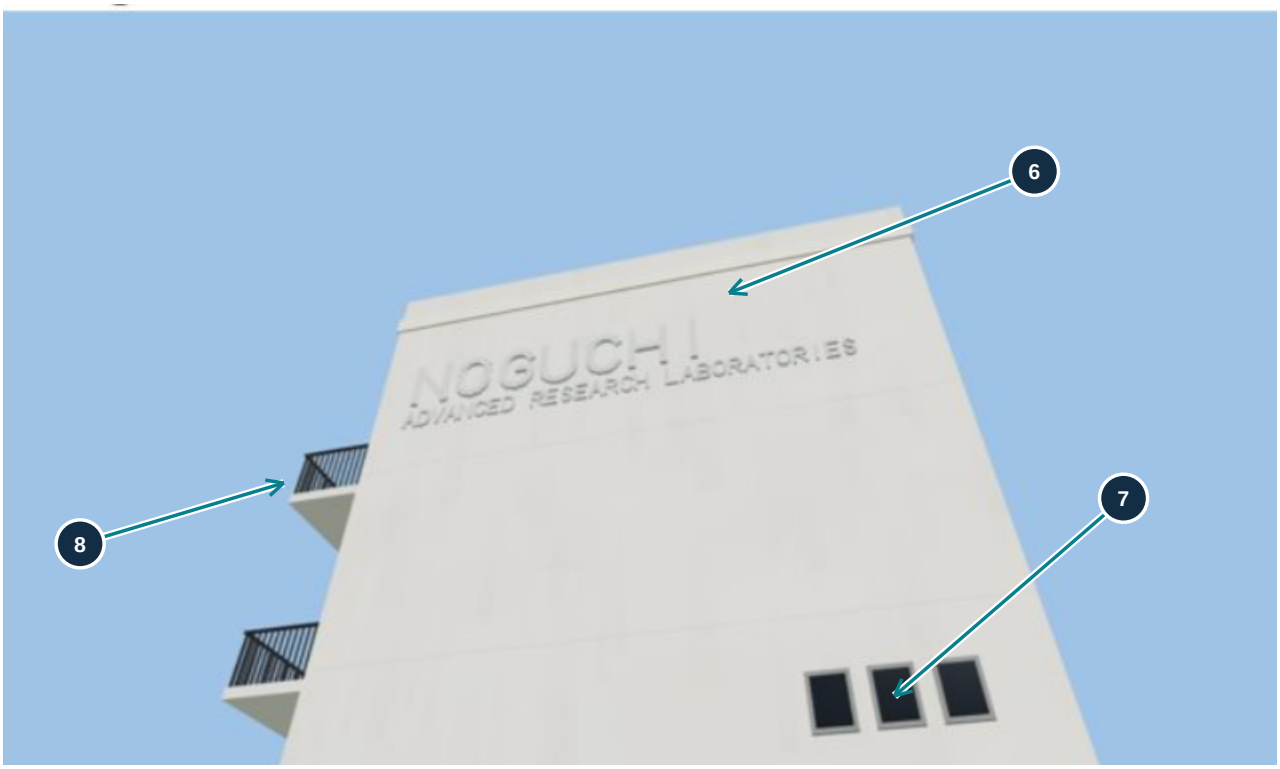

6 / Signed wall and top edge. The supplied detail shows a broad pale end face with NOGUCHI and ADVANCED RESEARCH LABORATORIES lettering below a shallow top/parapet band. This belongs to B01, not the slender detached tower.

7 / Small opening group. Three small dark rectangular openings are visible near the lower right of this crop. Preserve their grouping and surrounding blank wall at the verified elevation. This crop does not establish every opening on all faces.

8 / Projecting landings. Railed projecting landings are visible on the left edge. They belong to the end-block facade system; do not transfer this broad-face arrangement wholesale onto T01.

Use Picture 1 to identify the violet correction site and Picture 4 to confirm the rear end-block position. Reassign/rebuild the broad block identity there. Do not simply copy the blue object unchanged: verify its face widths, height, opening layout and connection to the laboratory against the references.

Preserve the long finned laboratory wing and its separate pitched roof. B01 is not a new extra building to be placed on the roof, and it is not the yellow low neighbor.

05 / Aerial placement and low neighbor

Picture 4 / Screenshot 2026-10-14 191617.png



9 / T01. Slim detached tower at the near-side end of the laboratory complex. Keep its own footprint and slender wall/slab silhouette.

10 / B01. Broad pale rear end block associated with the long white, vertically divided laboratory structure. Its location and width differ fundamentally from the tower.


11 / B02. Yellow-marked low structure beside the tower, partly obscured by the foreground roof in this aerial view. The user explicitly specifies one floor. Keep it low and separate.

Orientation rule: screen-left/right depends on camera direction. Register these objects in world coordinates using the driveway, tower and long roof as anchors. Do not infer compass directions solely from this photograph.

Retain surrounding road/parking access, landscaping and building setbacks where supported. These references do not justify moving the full complex or replacing the foreground laboratory roof.

06 / Low building: roof and wall treatment

Picture 7 / Screenshot 2026-10-14 191940-TOWER SIDE.png

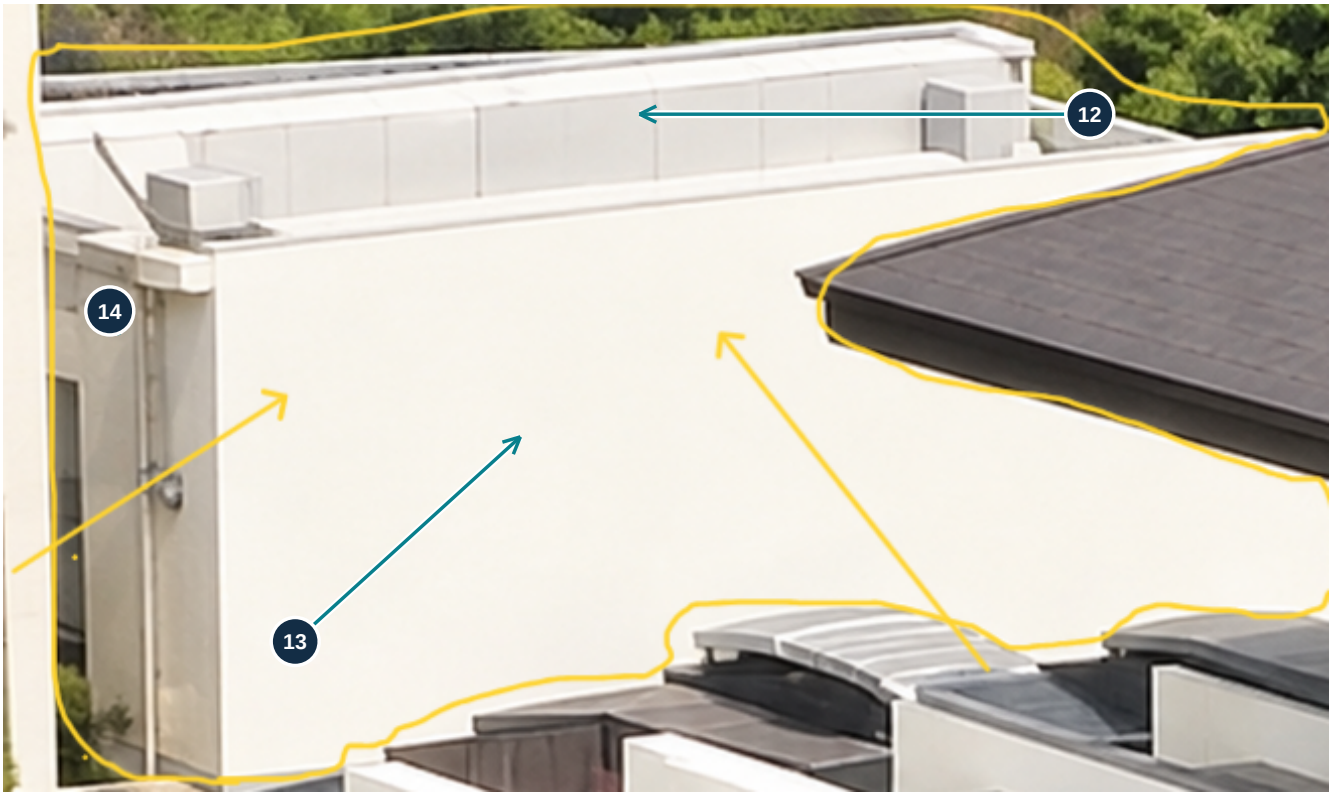

12 / Flat roof and parapet. A low rectangular white roof enclosure/parapet and roof-level services are visible. Preserve this roof family; do not add a pitched hostel-style roof or a second occupied floor.

13 / Broad pale wall. The exposed face is mainly blank. Do not populate it with repeated windows, balconies or fins without evidence. Preserve the roof-to-wall relationship and low overall height.


14 / Services and edge details. Visible corner/vertical service lines and roof equipment are localized details. Place only what can be supported and do not turn them into generic windows or extra tower elements.

B02 is the one-floor building identified in yellow by the user in Pictures 4 and 7. A parapet or plant enclosure is not an extra floor. The foreground laboratory roof hides part of its base/connection, so final hidden dimensions must remain explicitly provisional.


First match its position and visible silhouette in the aerial view; then tune the walls, parapet and equipment. Maintain the access space around T01 and the entrance. Do not merge T01, B01 and B02 into one generic mesh.

07 / Entrance: current versus target

Picture 5 / Screenshot 2026-10-14 191940.png

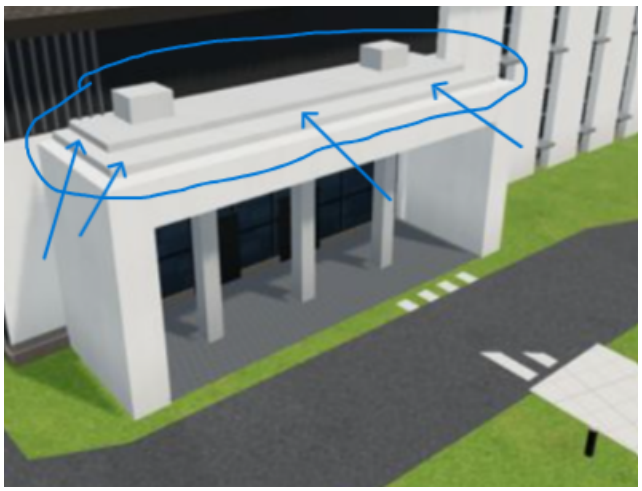

Picture 6 / Screenshot 2026-10-14 191940-REAL WORLD.png

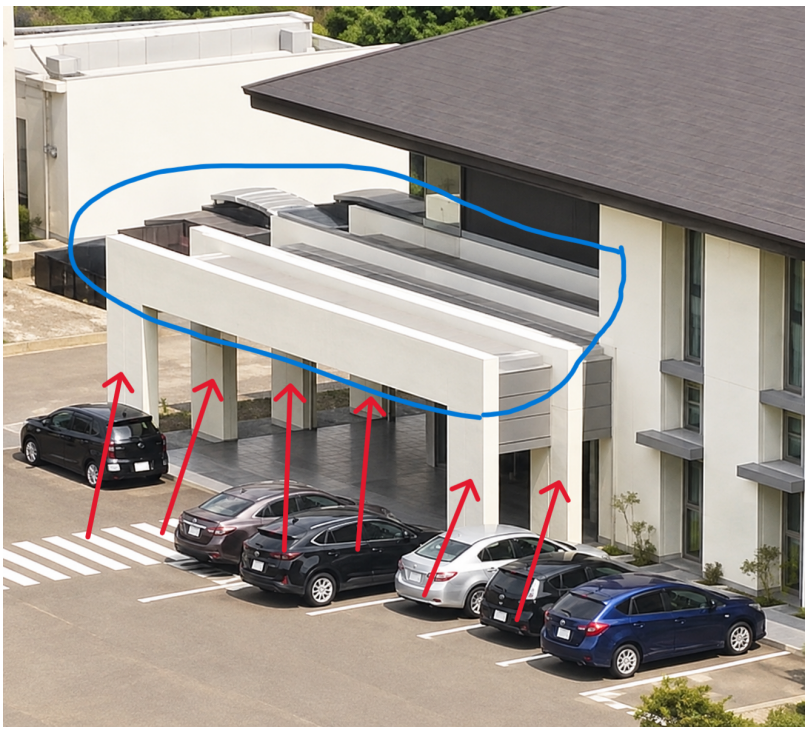


Roof error: Picture 5 reads as simplified exposed stair-like bands with isolated block caps. Picture 6 shows multiple rectangular frame/portal elements at successive depths, dark roof infill surfaces, distinct trim/edge profiles and a smaller raised light-colored roof connector. Reproduce that assembly; do not impose a generic staircase roof.

Support error: Picture 6 exposes discrete supports with open spaces and a recessed entrance behind them. Picture 5 includes some internal posts but has broad closed side treatment. Preserve verified posts and remove the unsupported wall portions that close the real open bays.

Do not flatten every roof element into one slab: the real canopy has visible changes of depth and edge level. The required correction is the specific reference assembly, not a blanket ban on all height differences.

08 / Entrance: numbered detail targets

Picture 6 / Screenshot 2026-10-14 191940-REAL WORLD.png

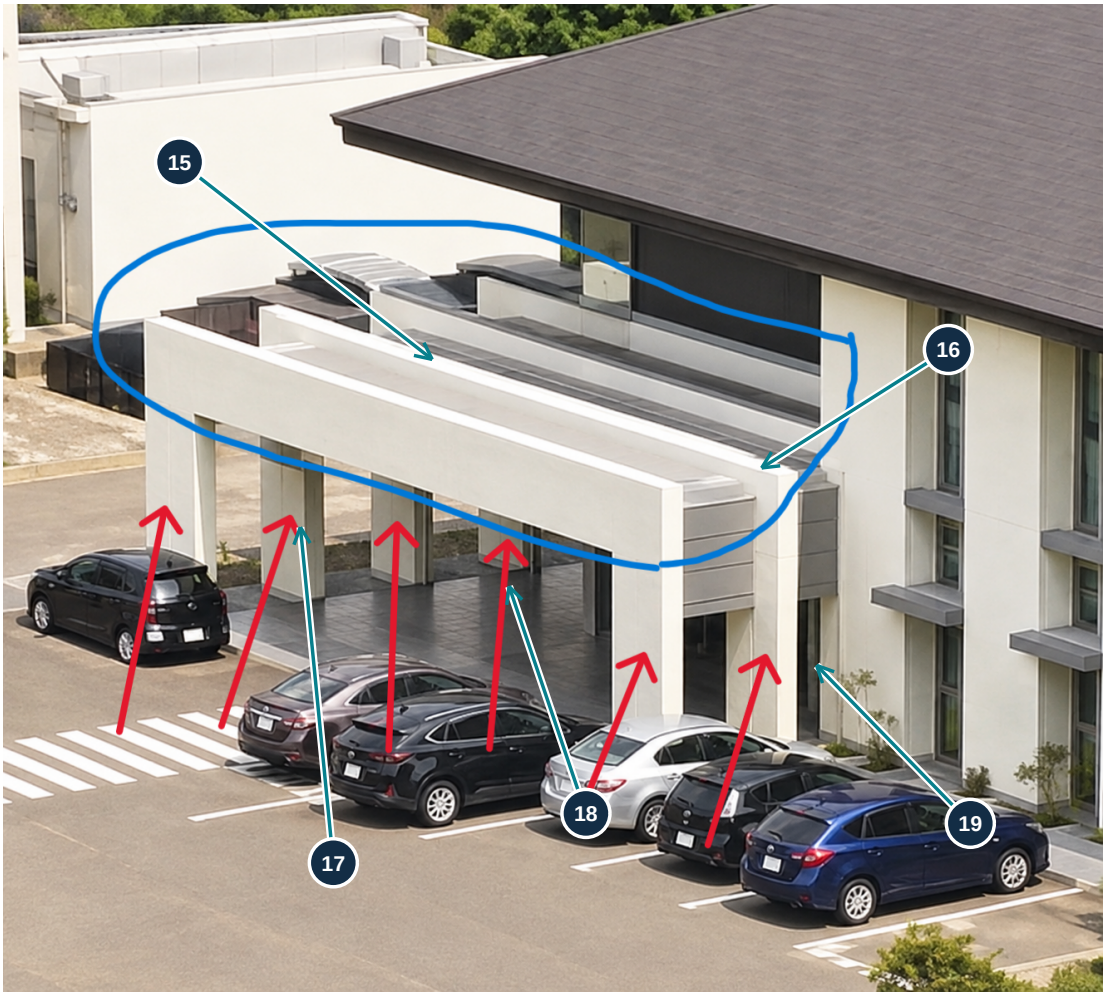

15 / Roof infill and connector. Trace the dark roof planes between pale frame edges and the small raised light-colored connector. Match actual shape and orientation; do not replace the connector with arbitrary cubes.

16 / Outer frame and depth layers. The dominant white portal has a horizontal beam and vertical ends. Additional frames sit behind it. Separate frame spacing in plan from elevation: perspective alone must not be converted into stair risers.

17 and 18 / Supports and open bays. Document each visible support, its width, depth, front/back row and gap to the next. Empty bays remain physically open. A single wall with painted stripes is unacceptable.

19 / Right-side return. Inspect the right upright, darker intermediate panel/edge and recessed opening. Keep legitimate vertical elements; remove only wall areas that incorrectly bridge the evidenced gaps.

Cars, arrows and shadows conceal portions of bases. Do not use six red arrows as proof of six identical pillars: each arrow may identify a different frame, post or return. Count architectural elements from the source, not annotation marks.

09 / Compulsory close-inspection clause

Claude must complete this inspection before modeling. Skipping it fails the task. Use the original seven images at native resolution. Crop and enlarge the tower, signed end face, low building, canopy roof and support bases separately. Cross-check every visible feature against a second view where available.

Required ledger. For each object T01/B01/B02/E01, record source number, world-location anchors, facade/view, geometry feature, visible count, placement, material, evidence confidence and unresolved hidden detail. For E01, add a numbered support-and-gap plan plus canopy depth/section sketch.

Opening audit. Record every supported window, door, grille, railing and open bay. Record blank wall spans too. Never fill a blank span with a generic window or fill an open bay with a wall because a procedural preset requires it.

Dimension discipline. Use adjustable dimensions calibrated to known project scale and perspective-correct comparisons. Separate estimated values from observed facts. Never describe guessed metre values, tower floor counts or canopy support counts as measured.

Prototype first. Build T01 silhouette and one accurate entrance frame/support module; compare to the sources before repeating or polishing materials. Correct source data so regeneration retains the result.

Mandatory verification. Render ground-level tower, matched aerial layout, signed end-block view, low-neighbor roof view and entrance oblique close-up. Check tower aspect ratio, identity placement, canopy layers, support spacing and clear open bays.

Delivery evidence. Provide changed files/object IDs, before/after views, completed ledger, collision/access checks actually run and unresolved assumptions. If references are unavailable, report that limitation and avoid claiming a verified reconstruction.

10 / Claude prompt: implementation

Copy this page and the following page together, and provide the complete PDF and all seven source images to Claude.

Task and priority. Fix the specified Noguchi objects in LEGONRUSH using this seven-image correction brief. Current user-marked identities override conflicting earlier assignments. Preserve separate T01 tower, B01 broad signed end block, B02 one-floor neighbor and E01 entrance canopy.

Required identity correction. Picture 1 blue site currently contains a broad block but must contain the tall slim tower in Pictures 2 and 4. The broad signed block identity belongs at the violet section; use Picture 3 for its supplied face detail and Picture 4 for context. Do not merely stretch the existing broad box or swap colors.

Tower reconstruction. Build the narrow pale wall-blade silhouette, observed exposed bays, dark horizontal landing edges, railings and correct top termination. Match height/width and separation relative to the laboratory. Preserve blank faces. Do not invent generic room-window rows or transplant broad B01 lettering/openings to T01.

B01 reconstruction. Restore the broad end face, supported parapet/lettering, grouped small openings and railed side landings at the verified position. Confirm the main laboratory connection and retain the separate dark pitched roof and finned elevations.

B02 reconstruction. Use yellow marks in Pictures 4 and 7. Keep one occupied floor, flat roof/parapet, pale mainly blank walls and only supported services. Do not add another floor or merge this volume with T01 or B01.

Entrance reconstruction. Compare Picture 5 with Picture 6. Replace stair-like simplification with the specific layered portal/frame and dark roof-infill assembly. Preserve supported edge/level changes and the smaller raised connector. Replace unsupported continuous side walls with discrete supports and genuine open gaps, keeping legitimate frame ends and existing correctly positioned posts.

11 / Claude prompt: acceptance

Non-negotiable inspection. Follow the compulsory clause on page 10. Open native images; produce enlarged crops and an object/feature ledger before editing. Trace roof planes, partitions, posts, gaps, openings and blank spans. Do not count marker arrows as pillars or use colored circles as footprint measurements.

Source implementation. Identify the owning mesh/procedural module, transforms, materials and collisions. Save baseline renders; correct object identities and placement; build one accurate module; validate; then complete verified details. Remove old incorrect geometry/colliders rather than hiding them beneath new shells.

Matched-view checks. Submit an aerial matching Picture 4, a tower ground view matching Picture 2, a B01 face view matching Picture 3, a B02 roof/side view matching Picture 7 and entrance detail matching Picture 6. Explain remaining perspective differences; do not claim exactness from mismatched cameras.

Acceptance checklist. Blue site reads as a tall narrow tower; violet site carries broad end-block identity; yellow neighbor remains one floor. Tower openings/landings are geometrically supported. E01 matches layered roof frames, dark infill, actual support positions and open bays. No invented openings or duplicate blocks remain.

Access and persistence. Check drive/parking and entrance clearance, geometry-aligned collisions, no invisible old walls and successful regeneration/reload. Report the actual checks performed and any failures. No test result may be fabricated.

Final response. List changed files and stable object IDs; attach before/after evidence; include the completed ledger and actual test results; state concealed or estimated details. A wrong identity, broad tower, closed intended bay or generic stepped canopy is a failed correction, even if the material colors look plausible.

Scope: this brief is a targeted Noguchi correction. It does not authorize unreferenced redesign of WAGMC, other campus buildings or the surrounding road network. Finish the verified structural corrections before decorative landscaping or lighting changes.