Noguchi and WAGMC detailed correction instructions

Reconstruct the buildings and their surroundings accurately in LEGONRUSH using the 20 numbered references. Correct the site plan and surface types first, then the facade geometry, entrances, tower, wall spans, openings, signs and planting. This is a task specification for Claude, with mandatory evidence checks before completion.

S20 Screenshot 2026-10-14 140347.png



Main finding The game currently simplifies distinct parking layouts and path networks, repeats generic facade strips and does not reproduce several important tower and entrance details. The corrections below separate directly visible defects from features that must be checked in the actual scene.

How to use this document Source IDs S01 to S20 follow the exact upload order. Mixed aerial views, extra perspectives and signage close-ups are grouped by content; they are not forced into ten artificial pairs. All supplied images are included.

Instruction to Claude Read the entire brief with the original images. The consolidated prompt at the end incorporates every detailed correction and the compulsory close-inspection procedure.

Source register 1 to 10

S01 Game WAGMC aerial and marked approach Screenshot (2362).png

S02 Real satellite WAGMC parking and auxiliary cluster Screenshot 2026-10-14 133830.png

S03 Game circulation loop Screenshot (2365).png

S04 Real satellite loop beside older courtyard institute Screenshot 2026-10-14 133954.png

S05 Game road level auxiliary approach Screenshot (2364).png

S06 Game WAGMC second aerial angle Screenshot (2361).png

S07 Game research laboratory facade and tower Screenshot (2370).png

S08 Real laboratory facade and entrance Screenshot 2026-10-14 140421.png

S09 Real aerial laboratory and surroundings Screenshot 2026-10-14 140532.png

S10 Real dusk laboratory and tower Screenshot 2026-10-14 140849.png

Grouping rule S01 with S02, S03 with S04, S07 with S08, S14 with S15 and S17 with S18 are useful comparison groups. S05/S06/S16 add game perspectives. S09/S10/S11/S19/S20 add real detail. S12/S13 support real versus game plan registration.

Source register 11 to 20

S11 Real entrance canopy close view Screenshot 2026-10-14 142934.png

S12 Real satellite laboratory compound Screenshot 2026-10-14 142306.png

S13 Game top view for registration Screenshot 2026-10-14 163110.png

S14 Game sign tower and parking Screenshot 2026-10-14 142524.png

S15 Real sign tower stair end and long facade Screenshot 2026-10-14 140609.png

S16 Game additional tower and adjacent block view Screenshot 2026-10-14 145526.png

S17 Game WAGMC side tracks Screenshot (2377).png

S18 Real satellite red soil corridor and cluster Screenshot 2026-10-14 145034.png

S19 Real raised letter facade sign Screenshot 2026-10-14 140555.png

S20 Real entrance landscape island and sign Screenshot 2026-10-14 140347.png

Grouping rule S01 with S02, S03 with S04, S07 with S08, S14 with S15 and S17 with S18 are useful comparison groups. S05/S06/S16 add game perspectives. S09/S10/S11/S19/S20 add real detail. S12/S13 support real versus game plan registration.

Compulsory close inspection before modeling

Inspect native resolution Open original files, inspect the whole building and then enlarge crops by elevation, floor and facade bay. Read every visible wall division, opening and roof junction. Do not count windows from reduced report thumbnails or invent geometry from obscured areas.

Register identity and face Match the road, footprint, entrance, tower and adjacent roof shapes before assigning detail. Keep WAGMC, the older square courtyard institute, the Advanced Research Laboratories and the red roof auxiliary cluster distinct. A map pin or game label alone does not establish facade identity.

Produce a feature ledger For each object and elevation record floor and bay order, feature type, count, source ID, relative position and dimensions, recess or projection, material, observed opening state, confidence and unresolved notes. Include blank walls, fins, pillars, windows, doors, rails, screens and roof edges.

Avoid repeated false detail Do not interpret white facade fins as freestanding columns everywhere. Do not replace framed narrow windows with continuous dark stripes. Do not spread tower balconies or a sign onto every building. Repeat modules only after confirming that elevation has a repeated pattern.

Separate source from estimate Satellite establishes footprint relationships and visible surface distribution, not exact storey heights, window counts, roof pitch or road gradient. Photos have different camera angles, lighting and dates. Keep uncertain dimensions and hidden faces provisional.


Completion requirement Provide annotated crops, the feature ledger and matched reference and game screenshots. Audit every adequately documented floor and bay. Any known misplaced opening, wall division, pillar, roof junction or route material fails that region until corrected and rechecked.

Register the laboratory compound before editing

S12 REAL SATELLITE



S13 GAME TOP VIEW

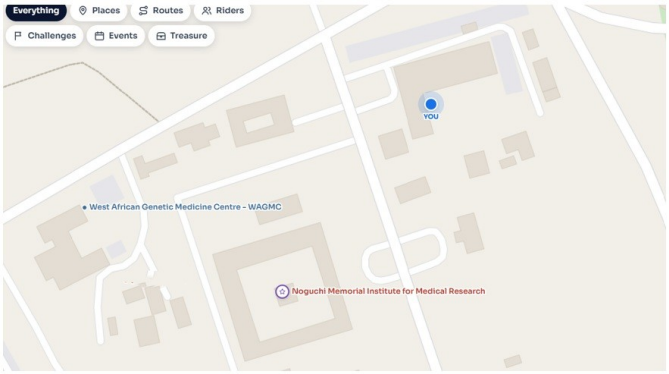

Original sources S12 and S13 are preserved in upload order. Inspect originals when counting bays or tracing edges.

Observed plan S12 shows a compound with separate roofed sides, open central land, parking and access around the main masses. S13 shows simplified game footprints and road outlines. Register them before extending or shortening a wall.

Required registration Use the top road, end tower and adjacent wing junctions, compound openings and outer parking alignment. Apply one scale rotation translation fit. Satellite crops are rotated differently; do not mirror them.

Scope rule The older square courtyard complex appears in S02/S04. It is not automatically the same asset as the long dark roof laboratory front in S08/S12. Verify scene object IDs for each before editing.

Acceptance An overhead comparison shows separate roof sections and voids in the right places. No shortcut fills the open compound or moves walls merely to fit a map label.

Building identity and geometry schedule

WAGMC Use S02/S18 for its roof plan, landscaped courtyard and entrance parking relationships. S01/S06/S17 are current game states to correct. Do not apply the laboratory grey roof and facade fin module to WAGMC automatically.

Older courtyard institute The square or ring shaped roof with inner courtyards appears in S02/S04 beside the auxiliary structures and loop. Preserve its courtyard voids and separate road relationships. This set has no detailed elevation for every older wing.

Advanced Research Laboratories S08/S09/S10/S11/S15/S19/S20 establish the long pale finned facade, dark pitched roof, deep entrance portal, taller sign and stair end and planted entrance island. S07/S14/S16 are the relevant game inspections.


Auxiliary cluster The red marked S02 group and S18 roofs show a compact irregular collection of small structures and open ground. Preserve visible footprints, orientations and roof patches rather than replacing the cluster with repeated detached white blocks.

Unresolved association S16 places a striped building with a WAGMC game label near the Noguchi tower. Verify its correct real footprint and identity using the maps and S09/S15 before relocating or renaming it. Do not certify a one to one match from labels alone.


Strict wall rule Change each wall span using registered roof corners, opening bays and source proportions. Do not stretch an entire facade and carry its original window count with it. Update roof, floor bounds, openings and collision together.

WAGMC parking and entrance layout

S01 CURRENT GAME

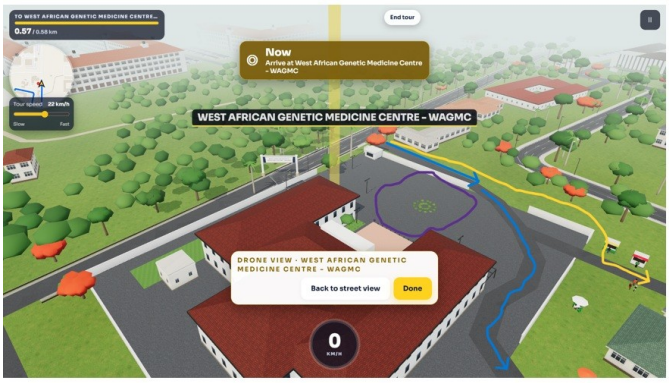

S02 REAL SATELLITE

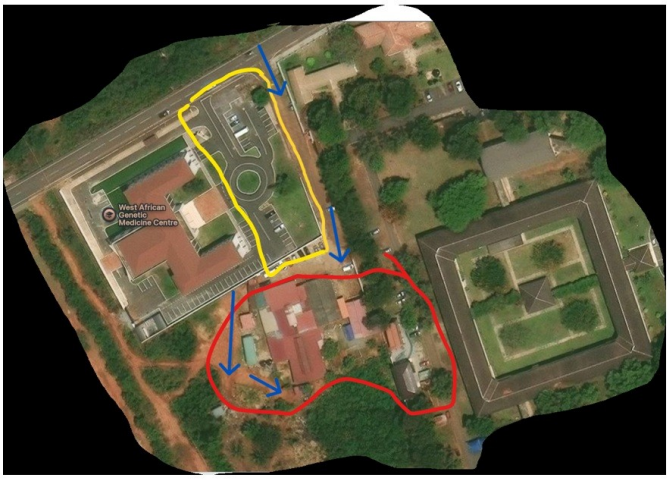

Original sources S01 and S02 are preserved in upload order. Inspect originals when counting bays or tracing edges.

Visible mismatch The game has a broad simplified dark paved apron and a circular green motif. The yellow outlined real parking area is a specific narrow elongated layout with white bays, circulating access and several bounded planted islands including a round one.


Required correction Trace the real paved perimeter, parking rows, planted strips and circular island from S02. Build physical kerbs and grass islands with correct adjacency; a circular decal on a large empty apron is insufficient.

Auxiliary zone The red outline identifies a distinct irregular roof cluster and mixed ground near the parking end. Register the blue arrows to actual routes, keeping this cluster separate from the large courtyard building on the right.


Acceptance From the S02 overhead orientation, parking extent, island shapes, marked bays, entrance connection and auxiliary roof locations agree. Material boundaries remain legible at road level.

Additional WAGMC approach checks

S05 GAME ROAD LEVEL

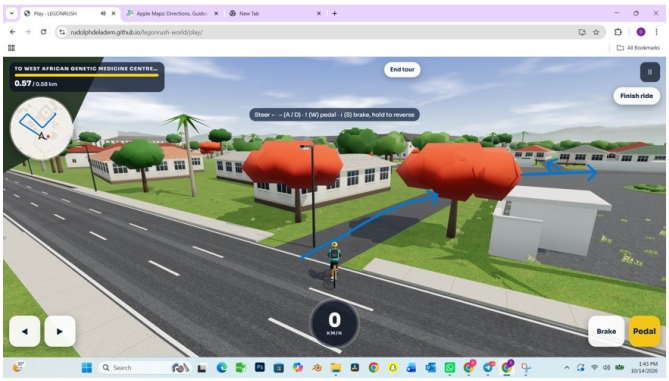

S06 GAME AERIAL

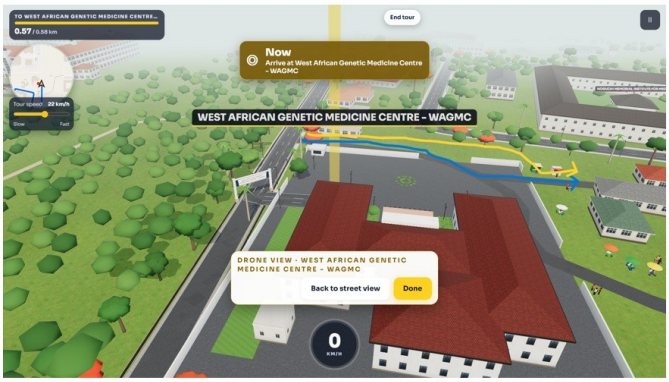

Original sources S05 and S06 are preserved in upload order. Inspect originals when counting bays or tracing edges.

Purpose These are additional game perspectives of the circulation and auxiliary approach. They are not independent real targets. Compare their lane endpoints and offsets with S02 and S18.

Required correction Check every thin asphalt branch and apron where the arrows lead. Retain verified vehicle roads; replace unpaved red soil or service paths only where the satellite evidence supports that surface. Do not turn all paths grey merely because the game represents them as line segments.

Small structures Match each visible small block to an actual roof or confirmed utility object. Preserve irregular real spacing and access gaps. White rectangular placeholders must not establish invented buildings.

Acceptance After edits, both road level and aerial views show the same corrected surface regions, parking entrance, small structure locations and open circulation. Buildings and colliders do not cut across a verified path.

WAGMC parking and apron implementation

Trace region boundaries Build separate polygons for asphalt, each grass island, paver walk, kerb and red soil edge. Follow S02 parking outline and bay alignment, not the broad current S01 apron.

Parked bays Use the visible white bay rows and circulation gaps. Keep bays out of the planted strips and allow vehicle access from the actual entrance. Exact transient car counts are not a building specification.

Round island Model its kerbed physical boundary and grass or planting fill. Keep a consistent traversable road ring around it. Do not copy the circle into unrelated forecourts.


Roadside edge Register entrance width, gate or checkpoint location where visible, road setback, footpath continuity and drainage edge. Do not add unsupported formal gates because one game object happens to exist.

Auxiliary ground Use mixed soil vegetation and small hardstand where supported. Keep service access functional. No giant blanket apron between all structures.


Proof Submit S01 matched aerial and S05 road level renders plus a region mask showing asphalt grass paving and red soil. Verify reload persistence and access collision.

Loop beside the older institute

S03 CURRENT GAME

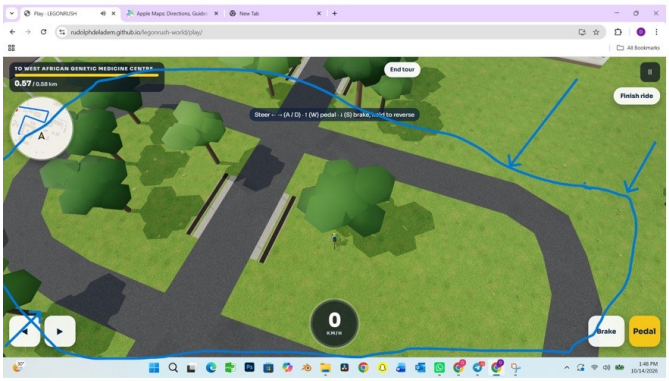

S04 REAL SATELLITE

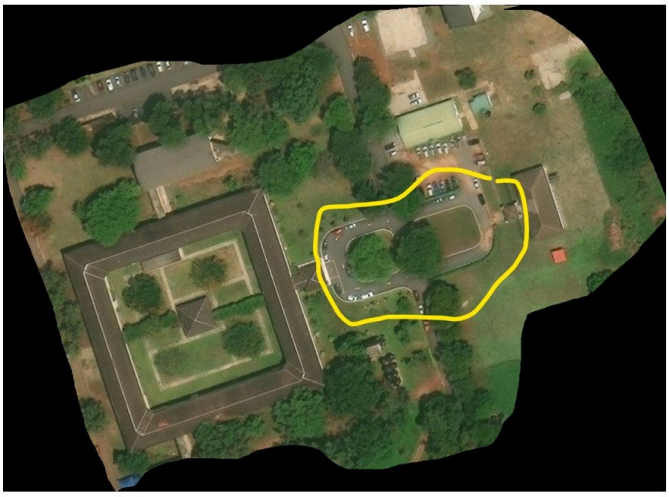

Original sources S03 and S04 are preserved in upload order. Inspect originals when counting bays or tracing edges.

Visible mismatch S03 shows a broad simple loop with grassy interior and arbitrary large trees. The yellow marked real loop in S04 has a specific rounded rectangular or irregular perimeter, parking on portions of the edge and a shaped central green area with trees.

Required correction Register loop endpoints and adjacent older courtyard building. Trace the real outer edge and inner planted boundary; preserve local parking and adjacent building access. Do not derive geometry from the yellow marker stroke thickness.

Surface distinction The loop is a real paved access and parking area. Do not replace it with red soil as part of the nearby unpaved corridor correction. Internal planted areas and surrounding earth remain separate.

Acceptance Overhead loop shape and parking distribution match S04; road level shows physical kerbs grass and correctly placed trees with clear access.

Loop and nearby grounds correction rules

Shape Use the real tangent changes and corner curvature instead of a perfect generic racetrack. Fit both the outer asphalt and inner island boundary to the registered map.

Island Keep open grass and trees in source supported positions. Avoid one large oversized central tree or a uniformly dense forest. Approximate tree crowns in the satellite image do not prove exact heights.

Parking Place visible bays around the actual edge where observed, with route width preserved. Do not put a parking row through an existing small roof or driveway.


Adjacent small roofs Keep the buildings above and beside the loop as separate footprints. Satellite shows roof positions and irregular gaps, not a reliable facade or floor count.

Ground transitions Blend kerb footpath grass and bare soil without floating strips. All vehicle surfaces need continuous collision. Decorative plants must not block the access throat.

Verification Capture a registered overhead, entry approach and inner island view. Show that the loop remains connected to the correct road and does not become a new road through the older courtyard complex.

Red soil corridor and side branches

S17 CURRENT GAME

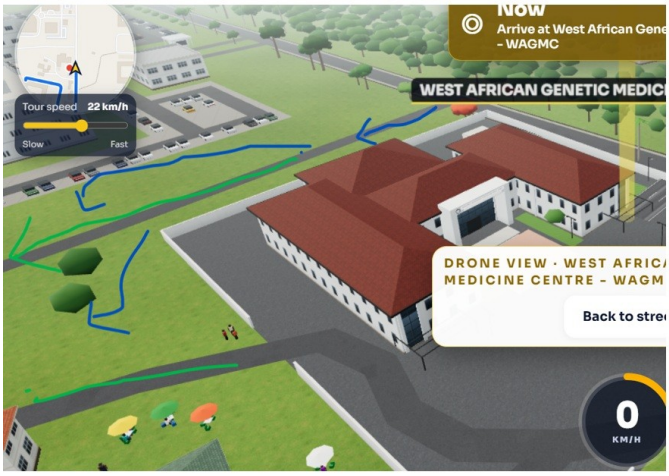

S18 REAL SATELLITE



Original sources S17 and S18 are preserved in upload order. Inspect originals when counting bays or tracing edges.

Visible mismatch S17 has dark asphalt branches around the WAGMC side. S18 shows a red brown unpaved corridor alongside the neighboring campus facilities and mixed earth access around the auxiliary red roof group.

Required correction Register the long blue arrow corridor and shorter branches. Replace incorrectly paved sections with red soil service or foot paths at their actual width and extent. Keep the paved main road along the top and verified parking access distinct.

Position Match the corridor relative to WAGMC boundary and the nearby UGMC side shown at left. The rotated views differ in camera direction; screen left is not a universal west coordinate.

Acceptance The corrected game has the intended unpaved corridor and branches with scrub edge texture, while real asphalt roads and parking remain paved. No black strip crosses a source supported soil zone.

Paths vegetation and auxiliary structures

Path geometry Trace visible worn ground width and branching points. Use uneven soil margins and patchy grass or scrub; avoid straight edged uniform asphalt styled ribbons with kerbs on unpaved tracks.

Texture Use red brown earth with fine roughness and restrained wear. Do not turn every orange roof pixel into soil. Source colour grading and bare ground shadows require cross checking.

Vegetation density S18 shows uneven scrub and trees with exposed soil gaps. Use volumetric bush chunks shared materials and varied heights. Do not blanket all land with thousands of individual trees or flatten it to manicured lawn.


Small structures Resolve each visible roof in the red roof auxiliary cluster. Preserve offsets, roof directions and yard gaps. Hidden height and opening layouts stay provisional; map roofs do not justify invented floor counts.

Access Keep existing supported vehicle or pedestrian routes clear. Use a continuous ground collider below soil texture and deliberate shrub collision rather than hundreds of invisible obstacles.


Evidence requirement Submit route region masks and overhead registration showing which branches changed material and which stayed paved. Explain each change with S02 or S18 rather than a global material rule.

Laboratory facade and entrance mismatch

S07 CURRENT GAME

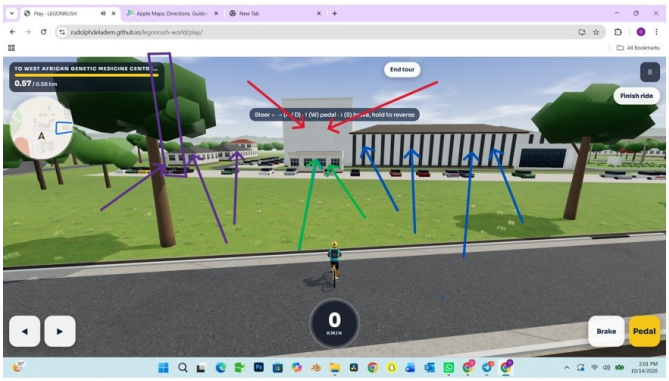

S08 REAL LABORATORY

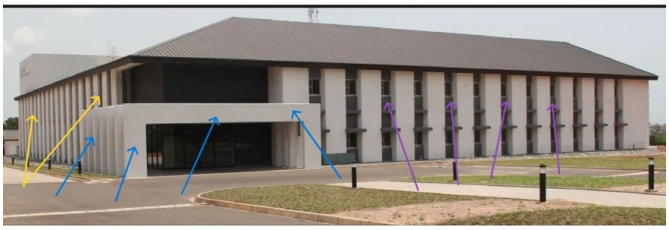

Original sources S07 and S08 are preserved in upload order. Inspect originals when counting bays or tracing edges.


Visible mismatch The game has generic thin dark full height stripes and a simplified central entry. The real facade has substantial light vertical piers or fins, narrow recessed framed window stacks, small projecting grey shelf bands and a deep rectangular entrance portal with dark recessed glazing.

Required correction Rebuild the correct mass and bay schedule. Separate solid pier faces from window slots, floor divisions and recess depth. Model the heavy portal and the upper dark bay as distinct features.

Identity This facade is supported by the real Noguchi laboratory images, despite the WAGMC route or floating game labels. Confirm object ownership and labels before reusing or renaming any geometry.

Acceptance At the S08 angle the entrance projects correctly, bays have real width and depth, the upper dark recess and roof align, and no false glass stripe replaces a blank pier.

Numbered laboratory geometry evidence

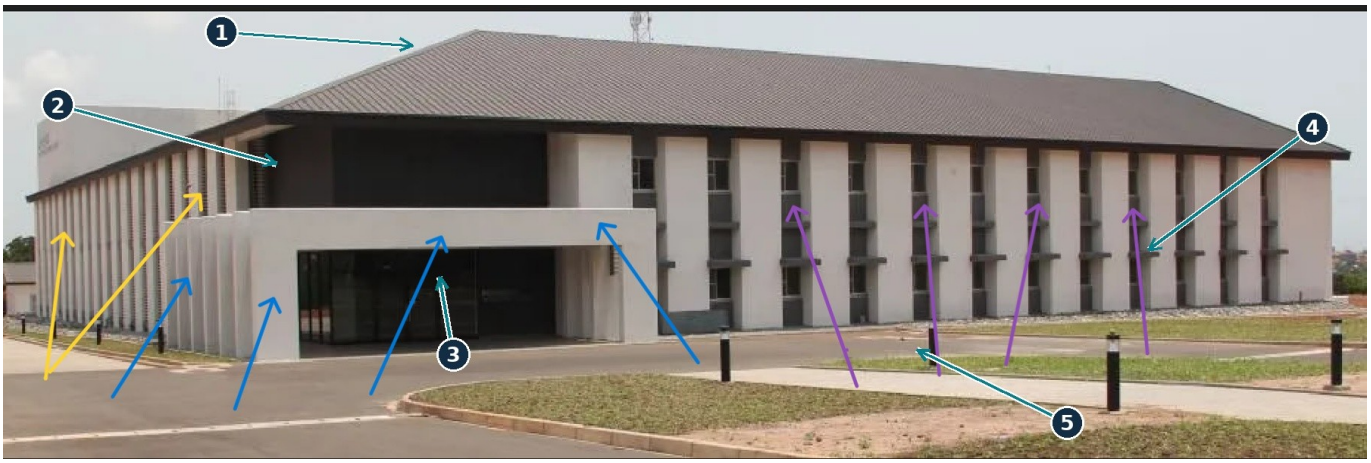

1 Roof Broad dark grey hipped roof with overhanging eaves and a dark fascia. Model silhouette and end hips separately from facade paint.

2 Upper dark bay Wide shadowed or glazed upper recess above the entrance, bounded by substantial pale wall pieces. It is not another row of narrow repeated slots.

3 Entrance portal Thick pale rectangular frame with real projection, recessed doors and side returns. Its depth must agree with S11 rather than a flat white rectangle.

4 Repeated facade bays Wide pale piers alternate with narrow framed dark window stacks and small grey projecting floor bands. Count actual source bays on each face.

5 Grounds Pale pedestrian paving, grass strips, kerb edge and short black bollard lights form separate regions. A single large plain lawn loses this geometry.

Laboratory wall and window placement contract

Bay schedule Record each solid pier width and each narrow window stack by floor. Window mullions sill projections and recessed lower openings remain visible at bicycle distance. Do not leave continuous featureless dark strips.

Piers versus columns Most repeated white vertical facade pieces are integral wall fins or piers. Preserve wall returns and depth. Do not turn all of them into detached circular pillars or add decorative supports across doors.

Floor interpretation Read the framed tiers and grey shelf bands from S08/S11. Roof height does not establish an extra occupied level. Keep the end tower floor or landing count independent from the low long facade.

Roof relation Correct the hipped roof overhang and ridge arrangement, then fit walls under it. Do not stretch the roof and keep old wall heights or window spans unchanged.

Entrance asymmetry S08 places the portal toward the end of the long face near a returning facade. Match its registered location; do not automatically place it in the exact centre of a symmetric game box.

Acceptance Provide elevation crops with numbered bay boundaries and a source versus model count comparison. Blank spans stay blank; narrow windows have frames and recesses; all known misplaced openings are corrected.

Aerial and dusk checks on the same ensemble

S09 REAL AERIAL



S10 REAL DUSK VIEW



Original sources S09 and S10 are preserved in upload order. Inspect originals when counting bays or tracing edges.

Aerial evidence S09 establishes the long roof mass, rear pale flat roof/service volumes, equipment, taller end element, parking edge and routes. The rear is not another copy of the front pitched roof.


Tower evidence S10 shows the end tower rising above the lower main mass and its side projection through the tree. This corroborates the end volume seen in S15 and S19; it does not establish every concealed face.

Lighting Dusk illumination affects wall and window colour. Use neutral daylight S08/S11 for base materials. Add local lights only where supported; do not paint lit window slots yellow.

Acceptance Overhead and ground views describe the same roof and rear volume arrangement. Trees and lighting do not conceal a mislocated tower or missing rear block.

Sign tower stairs and long side wall

S14 CURRENT GAME

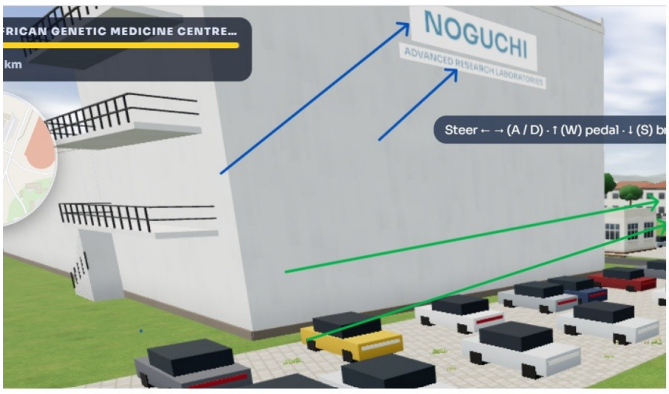

S15 REAL TOWER END



Original sources S14 and S15 are preserved in upload order. Inspect originals when counting bays or tracing edges.

Visible mismatch The game has simplified hanging balcony rail slabs on a broad blank tower, and a coarse parking area. The real end has stacked exterior landings linked to a ground stair, proper slab supports or returns, a projecting sign wall and a long returning finned elevation.

Required correction Register tower position and sign face. Rebuild visible landing extents rails steps and support geometry. Set the long facade start and end to the actual roof wall relationship, not a guessed uniform length.

Parking S15 shows patterned rectangular block paving and white bay lines. Do not substitute asphalt or omit the paving layout because other campus parking areas use asphalt.

Acceptance The tower and side view reproduces connected stair access visible slab depth correct sign proportions finned wall length and source supported parking geometry.

Additional tower and sign evidence

S16 GAME ADDITIONAL VIEW



S19 REAL SIGN CLOSE VIEW



Original sources S16 and S19 are preserved in upload order. Inspect originals when counting bays or tracing edges.

Game check S16 shows the tower parking and nearby striped asset relationship. Verify that the highlighted neighboring asset is correctly oriented and labeled; a WAGMC label is not proof it belongs beside this tower.

Sign form S19 shows raised separate NOGUCHI and ADVANCED RESEARCH LABORATORIES lettering on the pale wall. The game two bright rectangular label plates do not reproduce that treatment.

Wall return The close view preserves a large blank pale sign wall and an adjoining recessed louvre/window section. Keep that blank wall span; do not fill it with repeated windows.

Acceptance Sign lettering location scale and two line hierarchy match the real wall. Adjacent window/louvre bays belong to the returning section, not underneath every part of the sign.

Tower wall length and opening requirements

Match the end volume Use the tower corner, long wing roof edge and parking alignment across S09/S15/S19. Check width depth and facade orientation before fitting signs or balcony parts.

Landing schedule Record the visible landing tiers, rails, slab projections and ground stair from S15. Do not invent extra balconies on unseen faces or assume a landing tier equals a full new occupied storey.

Rail construction Use thin vertical rail bars and supported slabs. Existing game floating balcony strips must be connected to the observed walls/supports. Ground stairs need real treads and continuous access where shown.


Wall span Trace the long side wall through repeated fin or window bays. Maintain the blank tower wall and service return. Wrong overall length must be corrected with adjusted bay count or spacing based on evidence, not stretched window textures.

Sign material Use separate raised light letters with subtle shadow on the pale wall. Do not apply a large glowing white rectangle or assign the sign to an unrelated facade. Small letter spacing stays proportional.

Acceptance One oblique tower view and one close sign view prove the same corner and returning side. Check all bays, stairs and rails against crops; exact hidden staircase extent remains an explicit assumption.

Entrance canopy from the close reference

S11 Screenshot 2026-10-14 142934.png

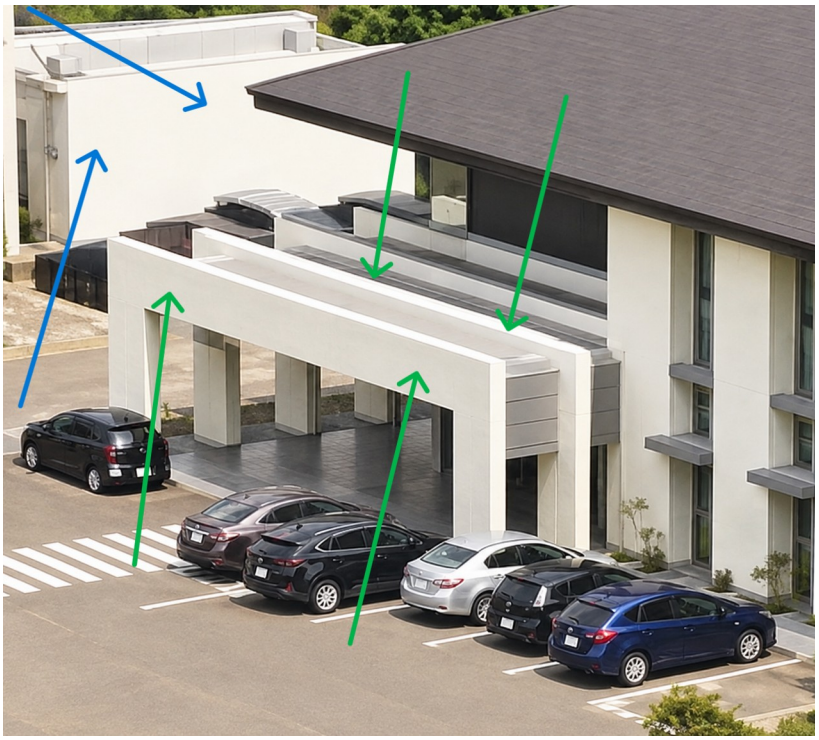

Required geometry The portal is a substantial projecting rectangular frame, with thick side returns and internal support divisions under a shallow layered canopy. The roof above the entry has separate stepped strips and visible service units.

Glazing and access Doors are recessed behind the frame and canopy. Preserve the dark entry threshold, visible floor finish, parking setback and pedestrian crossing. Do not put support piers through a door or the access route.

Placement Match portal depth and lateral position with S08/S09/S12. Count visible front and inner supports from the original close image; do not invent symmetric extras to complete an imagined frame.

Entrance implementation and ground interfaces

Portal frame Model the front header, both visible side legs, soffit underside and connection to the main facade. Give them volume so the oblique S11 image reveals actual depth.

Canopy layers Separate the shallow horizontal covering strips from the pitched main roof and taller rear service wall. Place observed HVAC or equipment locally. Avoid one giant solid slab filling every gap above the doorway.

Support positions Build a measured relative ledger from S11 for each visible support and gap. White wall returns, grey inner columns and glazing mullions have different thickness and function in the visual model.

Threshold Match light and dark floor surfaces under the canopy, parking bays immediately outside and the pale crossing near the left approach. Synchronise height and collider so a bicycle route has no invisible step or door blocker.

Cross view audit Front S08/S20 and oblique S11 must show the same frame width depth header height support spacing and door recess. If they disagree, correct geometry rather than selecting the flattering angle.

Acceptance Matched close renders show open access proper columns actual layered canopy and a consistent parking/approach interface without z fighting.

Entrance island and monument sign



1 Lower entry Dark recessed glazed doorway under the portal. Do not make the entrance a flat black square without frame or depth.

2 Portal and upper bay The portal header supports a distinct wide upper dark recess under the pitched roof. Keep those two regions separate.

3 Freestanding sign The pale textured monument has an outer rectangular frame and inset rough face with stacked lettering. This is separate from the raised wall sign in S19.

4 Kerb and paving Curved pale kerb encloses a shaped grass/planting island beside asphalt and light pedestrian paving. Do not make the island a simple lawn rectangle.

5 Planted surface Low shrubs in a soil bed around the sign, adjacent green grass and yellow flower or groundcover band. Keep each region and short bollard positions legible.

Grass paving bushes and tree distribution

Entrance lawn Use S20 to trace the shaped grass island, curved kerb, flower band, soil bed and paved walkway. Use restrained variation; bare soil around shrubs must not become grass everywhere.

Bollards Short black light posts occur along the pedestrian edge and entrance grounds. Keep their scale and spacing source supported; avoid tall streetlights in their place.

Trees Mature broadleaf trees near the tower appear in S09/S10; entrance core in S20 stays comparatively open. Map S02/S04/S18 has uneven canopy distribution, not a uniform grid.


Bush construction Use compact volumetric bush chunks and shared materials or instancing to keep performance manageable. Preserve silhouette variation and ground gaps. A flat green patch cannot reproduce shrubs at bicycle height.

Pavement types Differentiate S15 rectangular block paved parking, S11 asphalt bays and canopy tile, S20 pale pedestrian paving, S02/S04 asphalt circulation and S18 red soil. Do not impose one material on the whole precinct.

Season and reference dates Grass and soil appearance differ across daylight dusk and aerial images. Choose one coherent state with stable surface boundaries; transient construction piles cars and temporary signs are optional context, not compulsory architecture.

Auxiliary cluster footprint and access evidence

S02 Screenshot 2026-10-14 133830.png

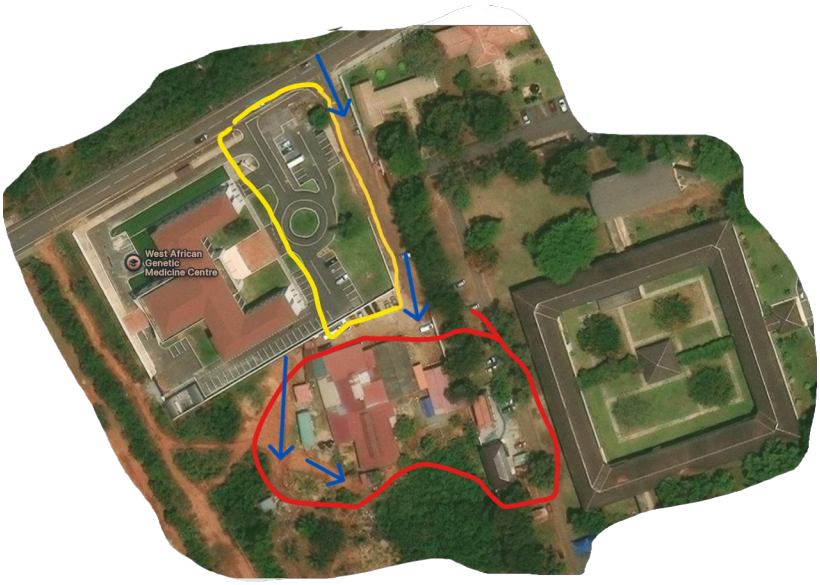

S18 Screenshot 2026-10-14 145034.png



Required correction The red roof group is distinct from WAGMC and the older courtyard building. Map each visible roof patch and mixed ground gap. Preserve short service branches and the wider unpaved corridor. Exact functions, facade openings and heights need a verified match before they are named or repeated.

Implementation order and verification views

Audit baseline Find owning object IDs generators transforms road records materials and collision bounds. Save overhead and road level views corresponding to every game source. Record current facade bay counts and road surface classification.

Correct site topology Register real maps and revise parking island loop geometry unpaved routes and auxiliary footprints. Preserve separate building identities and all courtyards or compound voids.

Correct building geometry Fit laboratory roof wall length piers window recesses entrance portal and tower stairs. Correct wall spans and opening position with the ledger before placing labels and plants.

Finish surfaces and labels Zone asphalt pavers canopy tile soil lawn flower beds and bushes. Add raised tower letters and the separate freestanding monument. Verify WAGMC and Noguchi game labels anchor to the proper assets.

Required screenshots Provide WAGMC aerial and approach, loop overhead, side corridor overhead, laboratory front, oblique canopy, tower stair/sign side and entrance island. Each needs a cited S source and matched camera orientation.

Test and report Reload or regenerate to verify persistence. Ride supported gate approaches paths parking edges loop and laboratory forecourt. Check collider gaps obstacles and slope seams. Record actual tests performance changes and unresolved assumptions.

Consolidated Claude prompt part 1

Task Correct Noguchi WAGMC and their environs in LEGONRUSH using this complete document and original S01 to S20 files. All detailed pages and the compulsory inspection protocol are part of this prompt. Preserve source order and mixed reference grouping.

Before geometry edits Inspect native resolution references and create a per object elevation floor and bay ledger. Map walls fins columns blank spans windows doors rails roof joints and terrain boundaries. Distinguish directly observed details from estimates.

Identity Keep WAGMC older courtyard institute Advanced Research Laboratories and auxiliary roof cluster separate. Resolve real footprint associations first. Incorrect route or floating labels do not establish identity.

WAGMC Use S02/S18 to replace the broad generic S01/S06 apron with the correct elongated parking layout, planted strips, physical circular island, bay rows and entrance access. Verify S05 road level and maintain open circulation.

Loop Use S04 to correct S03 loop perimeter, inner green island and parking distribution beside the older institute. Keep this real paved loop paved while correcting nearby unpaved tracks separately.

Corridor Use S18 to correct S17 red soil corridor and branches. Preserve verified main asphalt roads. Reconstruct irregular soil and vegetation margins and source supported small roof footprints.

Consolidated Claude prompt part 2

Laboratory facade Replace S07 generic stripes with S08 substantial pale piers, narrow recessed framed window stacks, projecting grey shelf bands and correct blank wall spans. Match bay counts separately on each face and keep piers integrated with walls.

Roof and rear Use S09/S12 to match the long dark hipped roof, end tower and separate rear flat roof service volumes. Do not fill compound voids or replicate the front roof on every rear block.

Entrance Use S08/S11/S20 for the deep rectangular portal, side returns, inner supports, layered shallow canopy, recessed glazing and upper wide dark bay. Front and oblique views must describe the same geometry.

Tower and wall length Use S15/S19 to correct S14/S16 tower width orientation blank sign wall landing slabs rails ground stair and returning finned facade length. Do not stretch wall textures or fabricate extra platforms.

Signage Build raised separate NOGUCHI and ADVANCED RESEARCH LABORATORIES lettering on the sign wall. Build the separate textured framed monument on the entrance island. Resolve and correct game labels attached to wrong assets.

Grounds Use distinct block paved parking asphalt bays canopy tile pedestrian paving grass shrubs flower bands and red soil. Restore shaped kerbs bollards and vegetation distribution; no global pavement or tree preset.

Consolidated Claude prompt part 3

Edit at the source Correct owning procedural/map/scene data so regeneration preserves changes. Remove duplicate stale meshes and conflicting labels or colliders. Keep unrelated campus precincts stable.

Mandatory comparison Deliver annotated original crops, feature ledger and matched source/game screenshots for every correction group. Count windows and fins, check wall span proportions, portal support positions, stair connections and surface region boundaries.

Rejection criteria Wrong building identity, a generic asphalt blanket, asphalt on a supported red soil path, missing island, wrong loop geometry, detached false pillars, windows in blank wall, missing tower stair or incorrect sign treatment fail the affected area until repaired.

Verification Capture registered overhead overlays and road level details. Test accessible paths parking edges loop and entrances with continuous terrain and collision. Record actual frame time draw calls and tests run; do not claim unseen validation.

Evidence limits No exact metres surveyed floor heights hidden facades or precise tree heights are supplied. Use project scale where available and report provisional values. Satellite roof colour alone cannot certify building function or opening layout.

Completion Provide changed file/object list per group fix log test results and explicit unresolved assumptions. Every adequately documented region must have zero known unexplained placement errors before it is marked complete.