

A

B

C





D

A

B


C

D

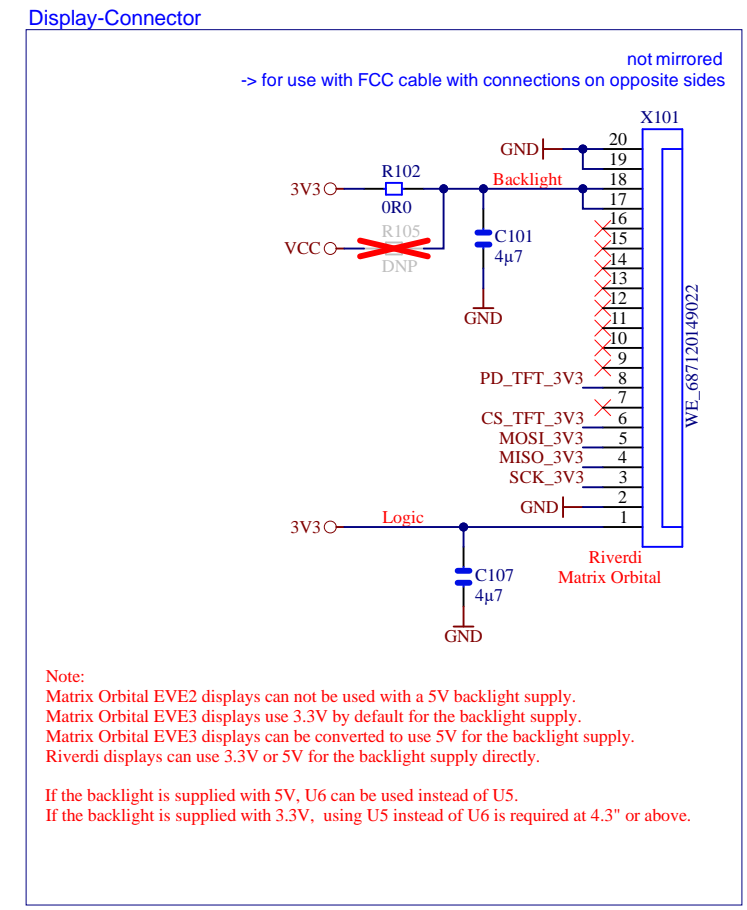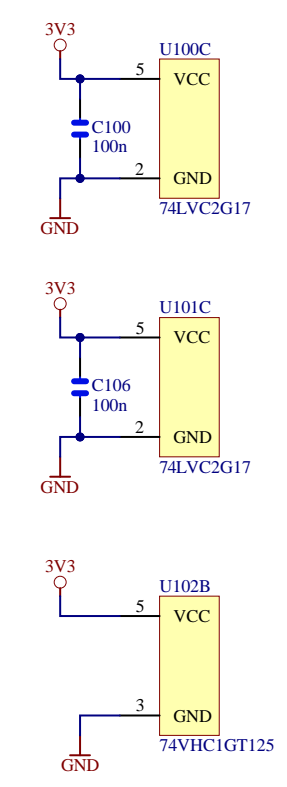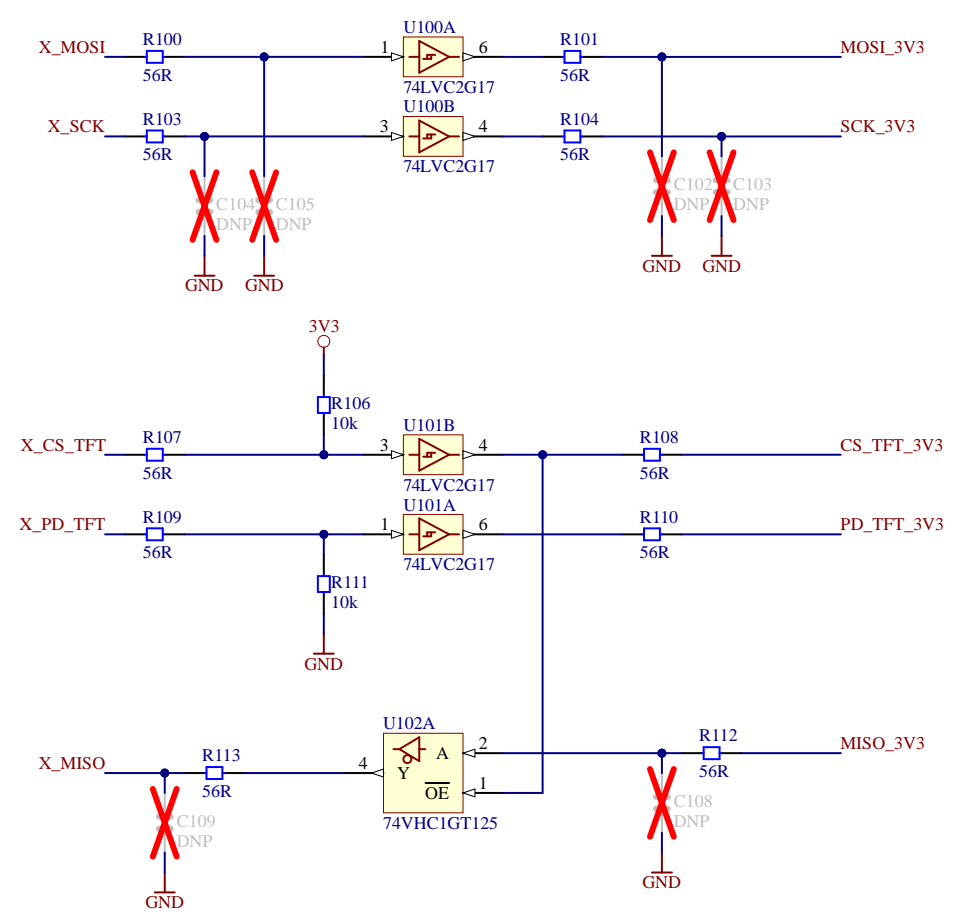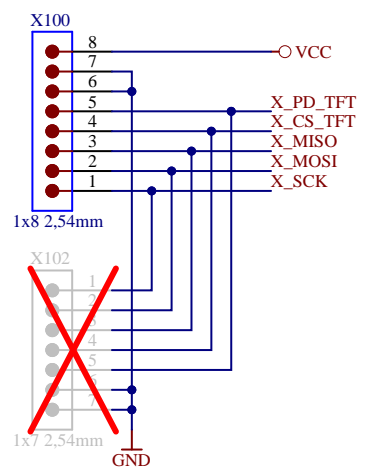

Note:
Matrix Orbital EVE2 displays can not be used with a 5V backlight supply.
Matrix Orbital EVE3 displays use 3.3V by default for the backlight supply.
Matrix Orbital EVE3 displays can be converted to use 5V for the backlight supply.
Riverdi displays can use 3.3V or 5V for the backlight supply directly.

If the backlight is supplied with 5V, U6 can be used instead of U5.
If the backlight is supplied with 3.3V, using U5 instead of U6 is required at 4.3" or above.

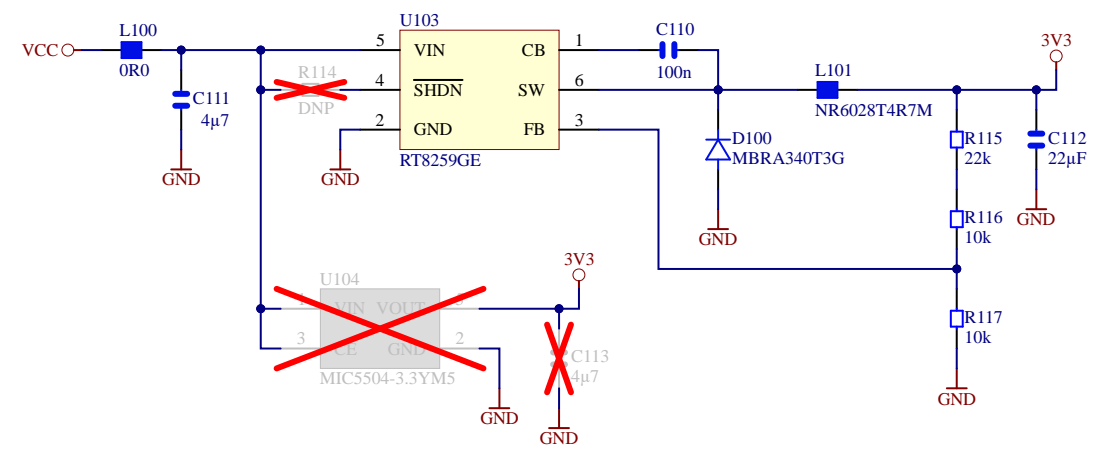

Project: EVE Display-Adapter
Revision: 3
Date: 13.05.2024
Copyright: Rudolph Riedel
License: MIT

