




Практика 26

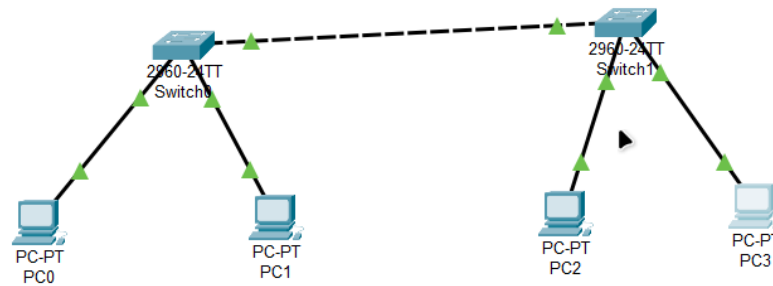

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int fa 0/1
Switch(config-if)#sw ac vl 10
% Access VLAN does not exist. Creating vlan 10
Switch(config-if)#no sh
Switch(config-if)#int fa0/2
Switch(config-if)#sw ac vl 20
% Access VLAN does not exist. Creating vlan 20
Switch(config-if)#no sh
Switch(config-if)#exit
Switch(config)#
%CDP-4-NATIVE_VLAN_MISMATCH: Native VLAN mismatch discovered on FastEthernet0/2 (20), with Switch
FastEthernet0/1 (1).
```

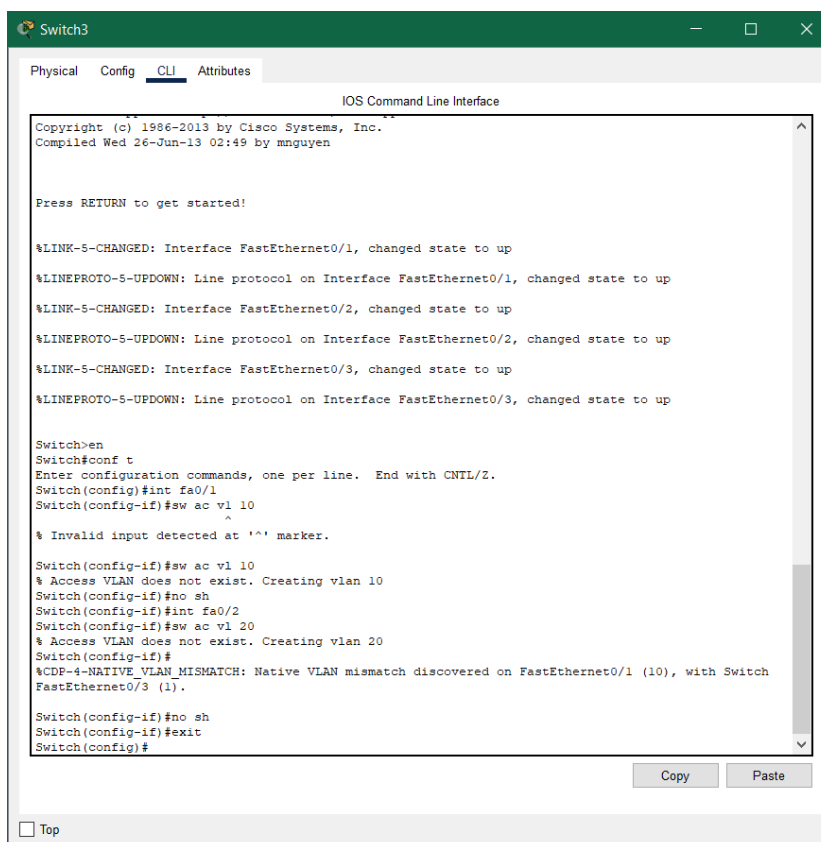

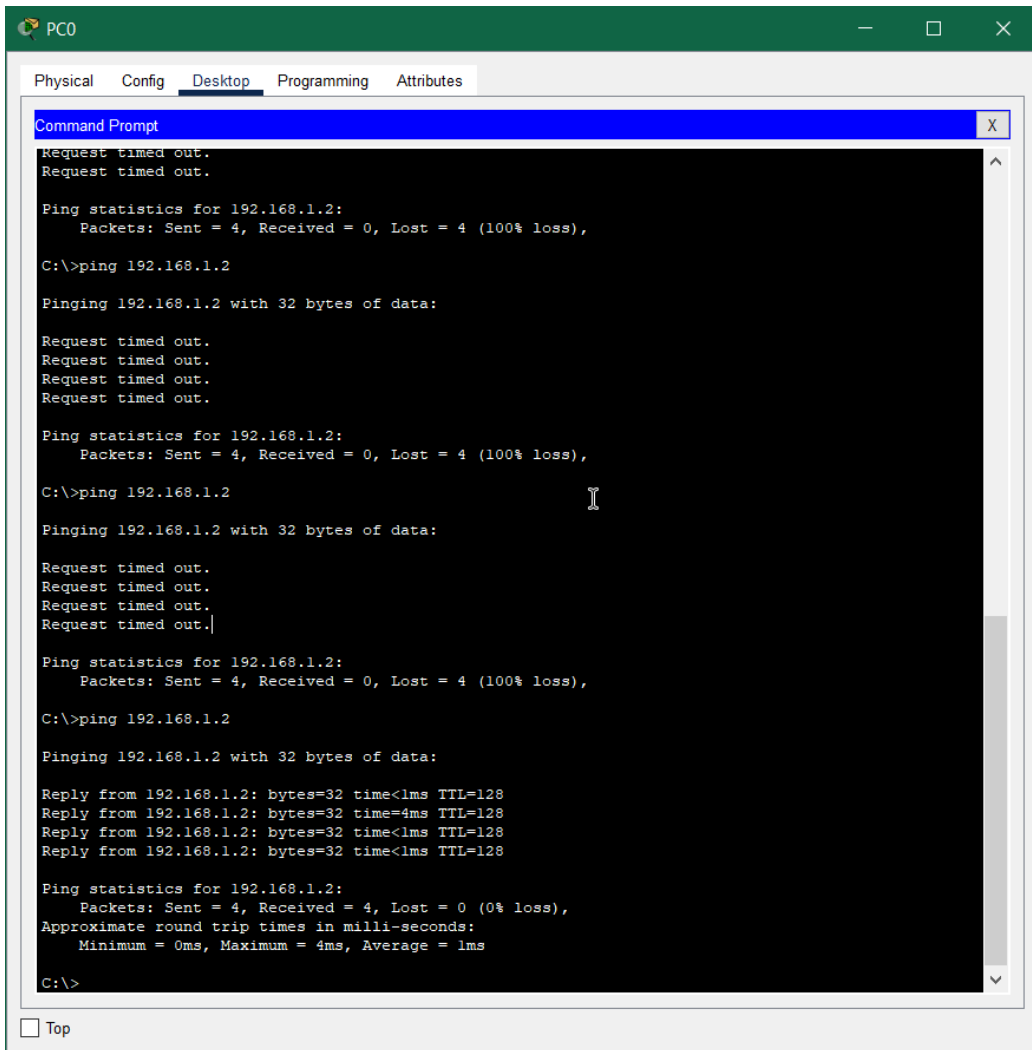

Router0

PhysicalConfigCLIAttributes

IOS Command Line Interface

249856K bytes of ATA System CompactFlash 0 (Read/Write)

^

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]:

Press RETURN to get started!

Router>en

Router#conf r

% Invalid input detected at '^' marker.

Router#conf t

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#int fa0/0

Router(config-if)#ip ad 192.168.1.100 255.255.255.0

Router(config-if)#no sh

Router(config-if)#

%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#int fal/0

%Invalid interface type and number

Router(config)#int fa0/1

Router(config-if)#ip ad 192.168.2.100 255.255.255.0

Router(config-if)#no sh

Router(config-if)#

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Router(config-if)#exit

Router(config)#

CopyPaste

Top

