

Практика 18

Создал конструкцию и задал ip



```
Switch1
Physical Config CLI Attributes
IOS Command Line Interface

Press RETURN to get started!

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up


Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int fa0/1
Switch(config-if)#int vlan 1
Switch(config-if)#ip address 192.168.0.2 255.255.255.0
Switch(config-if)#no sh

Switch(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

Switch(config-if)#line vty 0 5
Switch(config-line)#pass 123
Switch(config-line)#login
Switch(config-line)#enable pass 123
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

%LINK-3-UPDOWN: Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

Copy Paste
Top
```

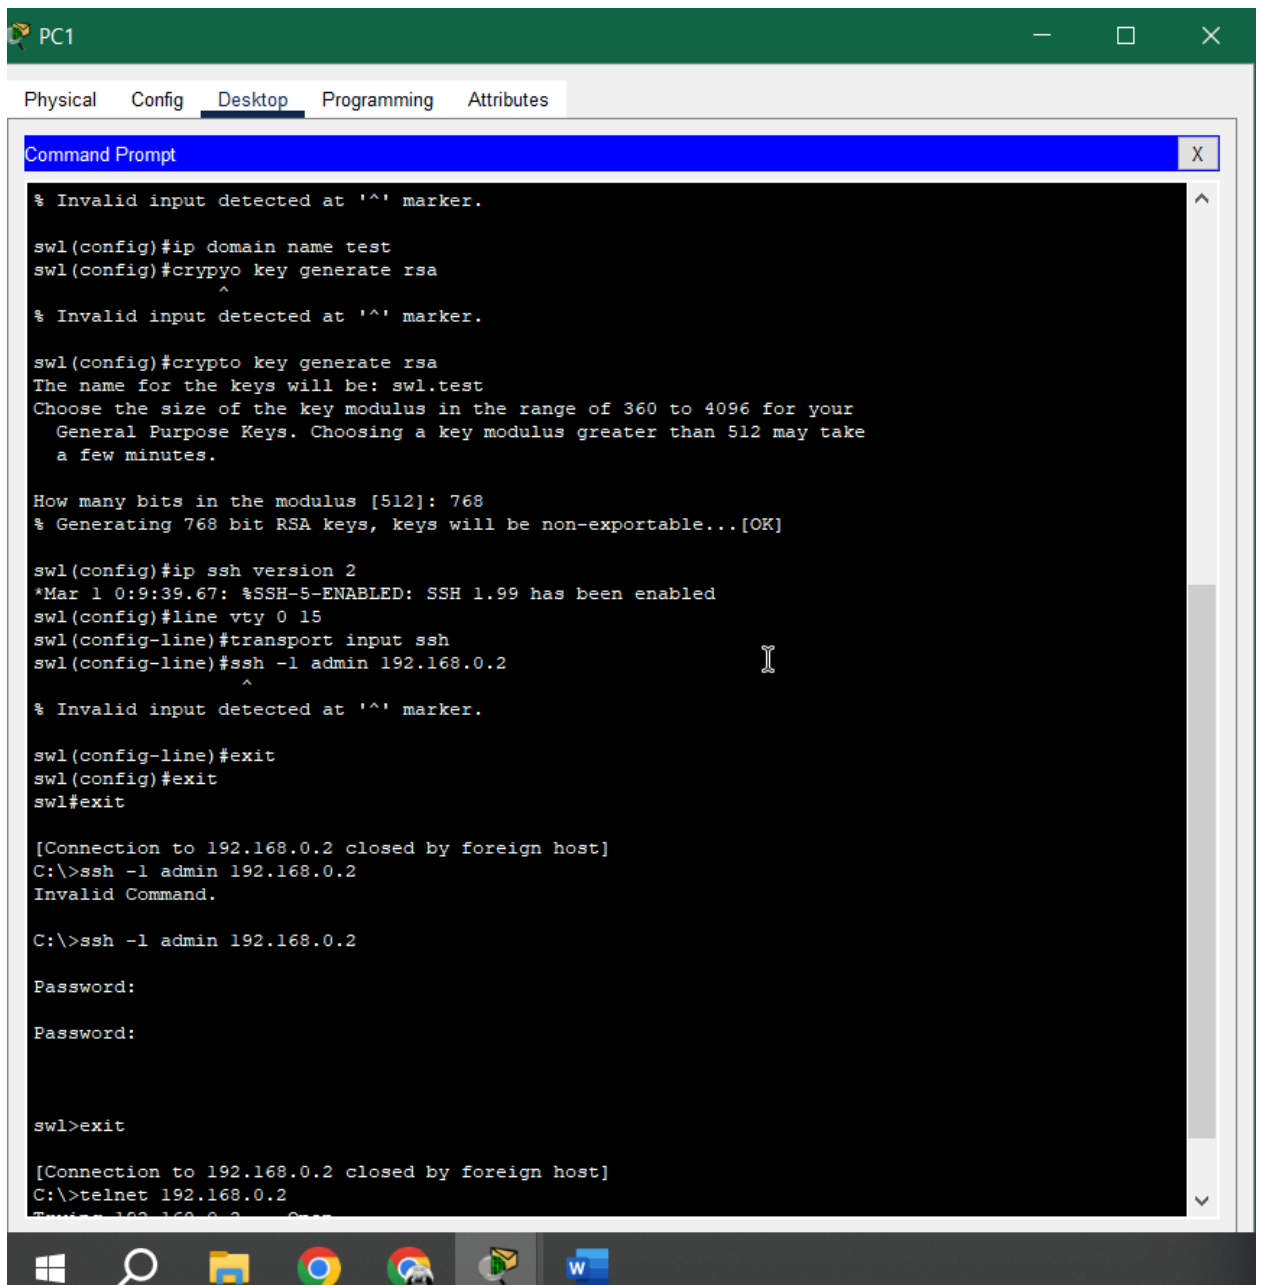

PC1

Physical Config Desktop Programming Attributes

Command Prompt

```
swl(config)#crypto key generate rsa
^
% Invalid input detected at '^' marker.

swl(config)#crypto key generate rsa
The name for the keys will be: swl.test
Choose the size of the key modulus in the range of 360 to 4096 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.

How many bits in the modulus [512]: 768
% Generating 768 bit RSA keys, keys will be non-exportable...[OK]

swl(config)#ip ssh version 2
*Mar 1 0:9:39.67: %SSH-5-ENABLED: SSH 1.99 has been enabled
swl(config)#line vty 0 15
swl(config-line)#transport input ssh
swl(config-line)#ssh -l admin 192.168.0.2
^
% Invalid input detected at '^' marker.

swl(config-line)#exit
swl(config)#exit
swl#exit

[Connection to 192.168.0.2 closed by foreign host]
C:\>ssh -l admin 192.168.0.2
Invalid Command.

C:\>ssh -l admin 192.168.0.2

Password:
Password:

swl>exit

[Connection to 192.168.0.2 closed by foreign host]
C:\>telnet 192.168.0.2
Trying 192.168.0.2 ...Open

[Connection to 192.168.0.2 closed by foreign host]
C:\>
```

☐ Top

