


Практика 21

Создал конструкцию

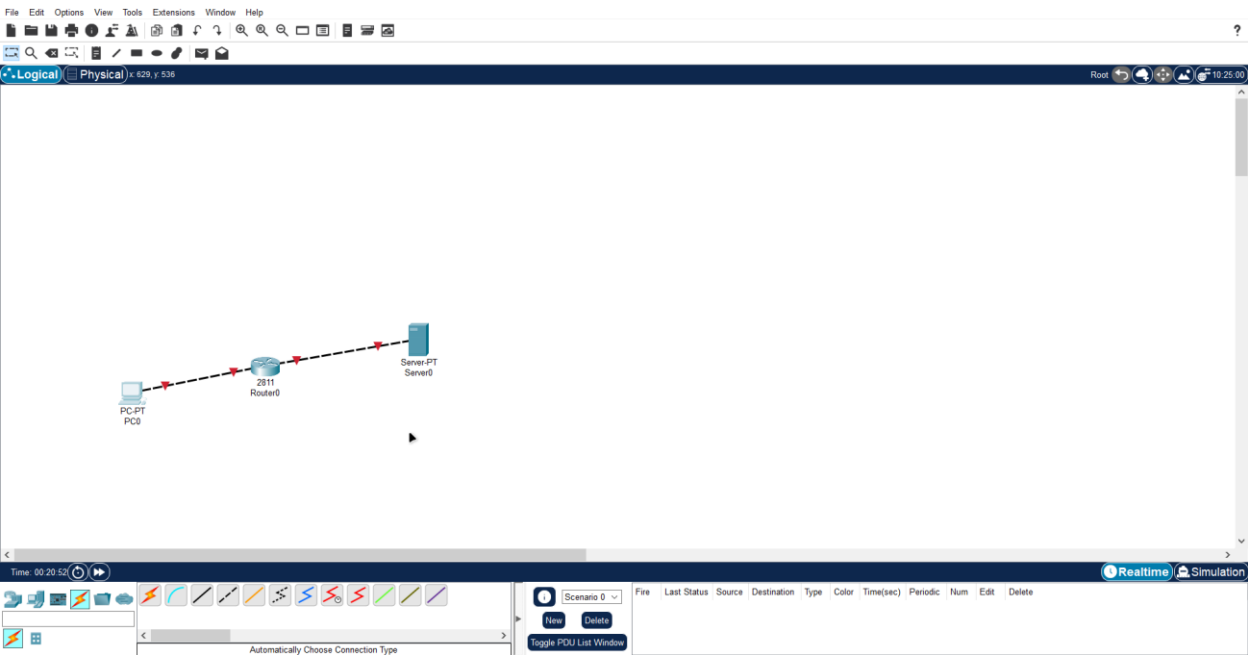

Device Name: PC0				
Device Model: PC-PT				
Port	Link	IP Address	IPv6 Address	MAC Address
FastEthernet0	Down	192.168.0.1/24	<not set>	0009.7CB7.D053
Bluetooth	Down	<not set>	<not set>	0007.EC7A.90DD
Gateway: 192.168.0.100				
DNS Server: <not set>				
Line Number: <not set>				
Physical Location: Intercity > Home City > Corporate Office > PC0				

Device Name: Server0				
Device Model: Server-PT				
Port	Link	IP Address	IPv6 Address	MAC Address
FastEthernet0	Down	30.30.30.1/8	<not set>	0006.2A84.EB76
Gateway: 30.30.30.100				
DNS Server: <not set>				
Line Number: <not set>				
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Server0				

Router0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status ☐ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☒ Half Duplex ☐ Full Duplex ☒ Auto

MAC Address 0001.4327.A801

IP Configuration

IPv4 Address 192.168.0.100

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Equivalent IOS Commands

```
%SYS-5-CONFIG:1: Configured from console by console

Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.0.100 255.255.255.0
Router(config-if)#ip address 192.168.0.100 255.255.255.0
Router(config-if)#
```

☐ Top

C:\>ping 30.30.30.1

Pinging 30.30.30.1 with 32 bytes of data:

Request timed out.

Reply from 30.30.30.1: bytes=32 time<1ms TTL=127

Reply from 30.30.30.1: bytes=32 time<1ms TTL=127

Reply from 30.30.30.1: bytes=32 time<1ms TTL=127

Ping statistics for 30.30.30.1:

Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|