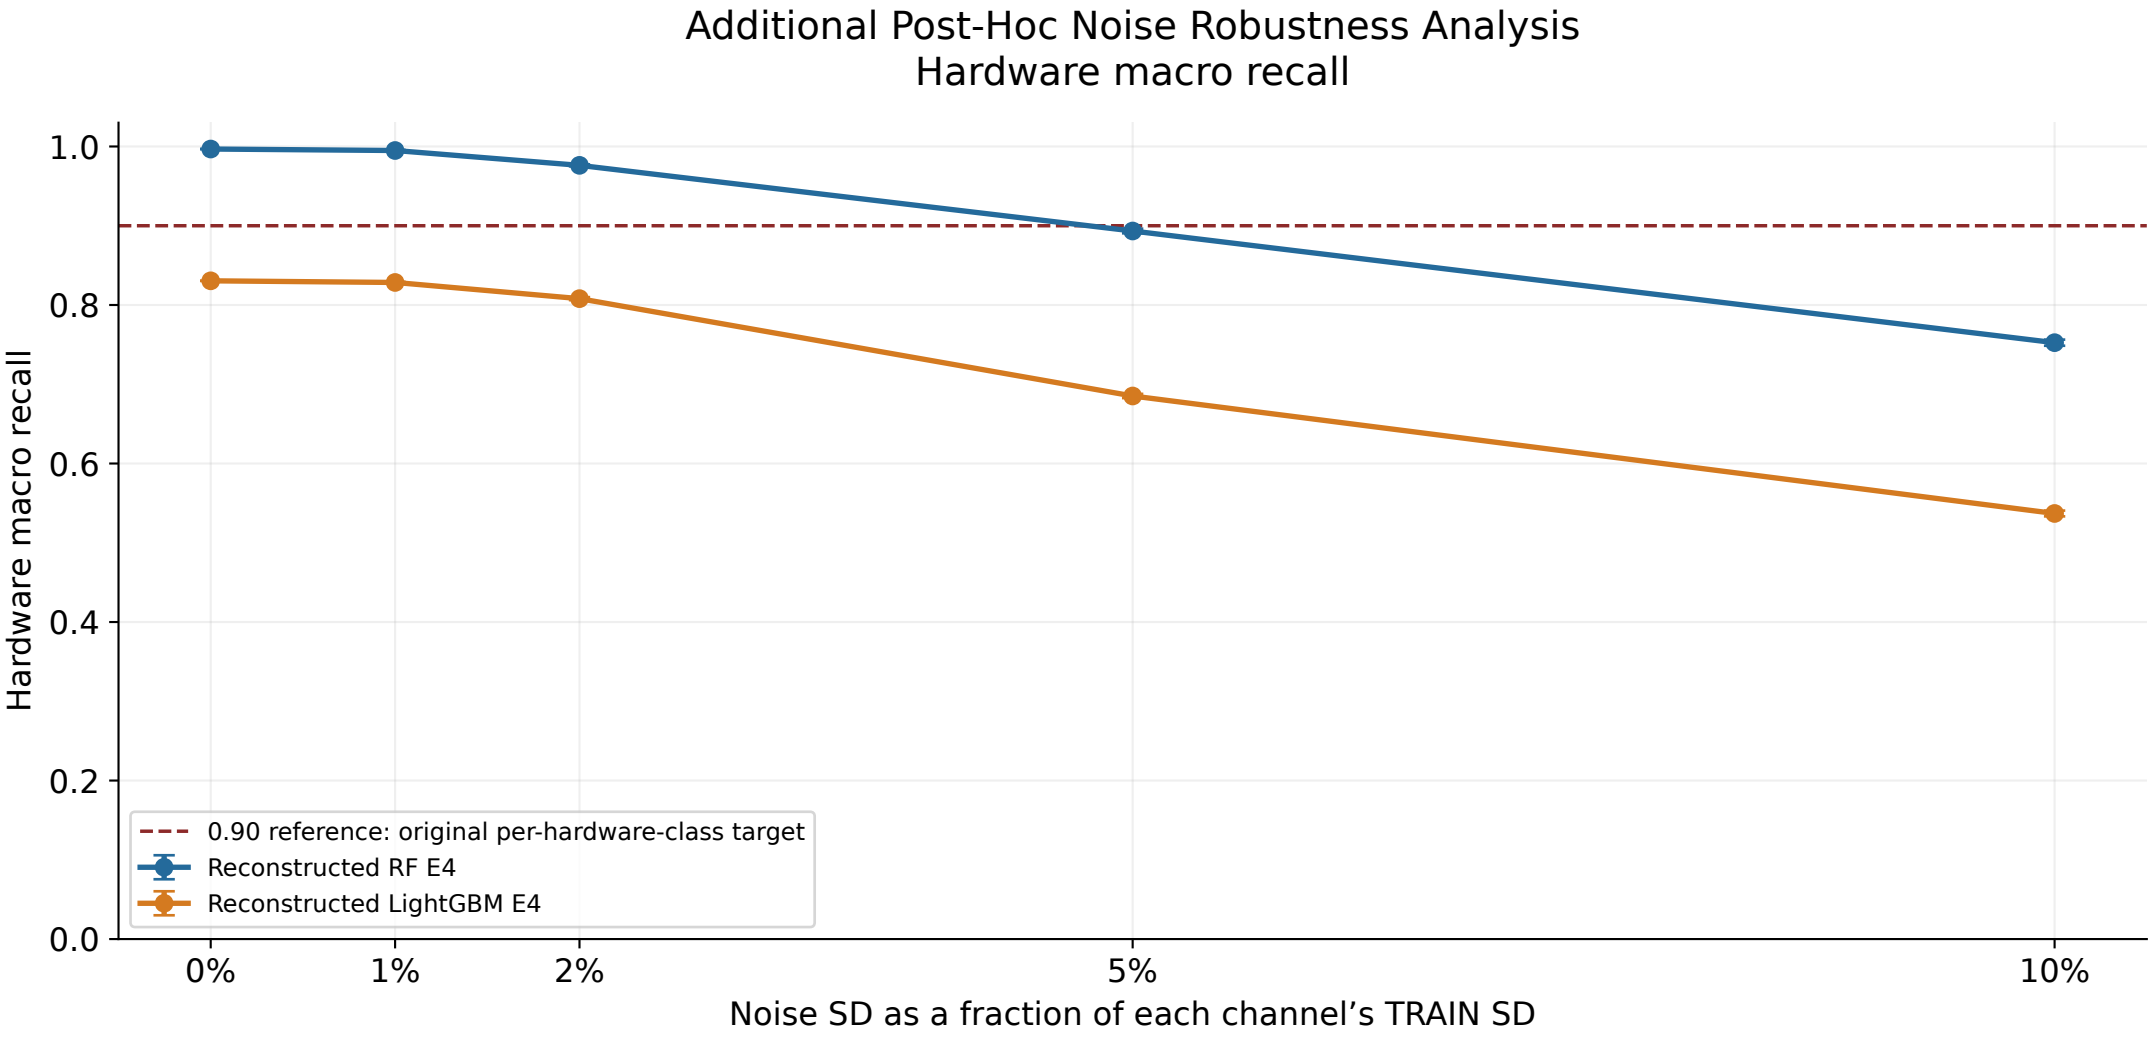

Coverage (both models): clean 100.0000%; 1% 92.1941 ± 0.0737%; 2% 84.4133 ± 0.0997%; 5% 74.7809 ± 0.1046%; 10% 69.5123 ± 0.1124%.

Mean ± sample SD across 10 paired seeds at nonzero noise; clean n=1. Coverage is shared by both models.

Coverage decreases because the unchanged input-quality rules can convert noise-induced negative electrical readings to missing values and trigger abstention.

End-to-end pipeline robustness under Gaussian sensor noise, including existing input-quality/abstention rules.