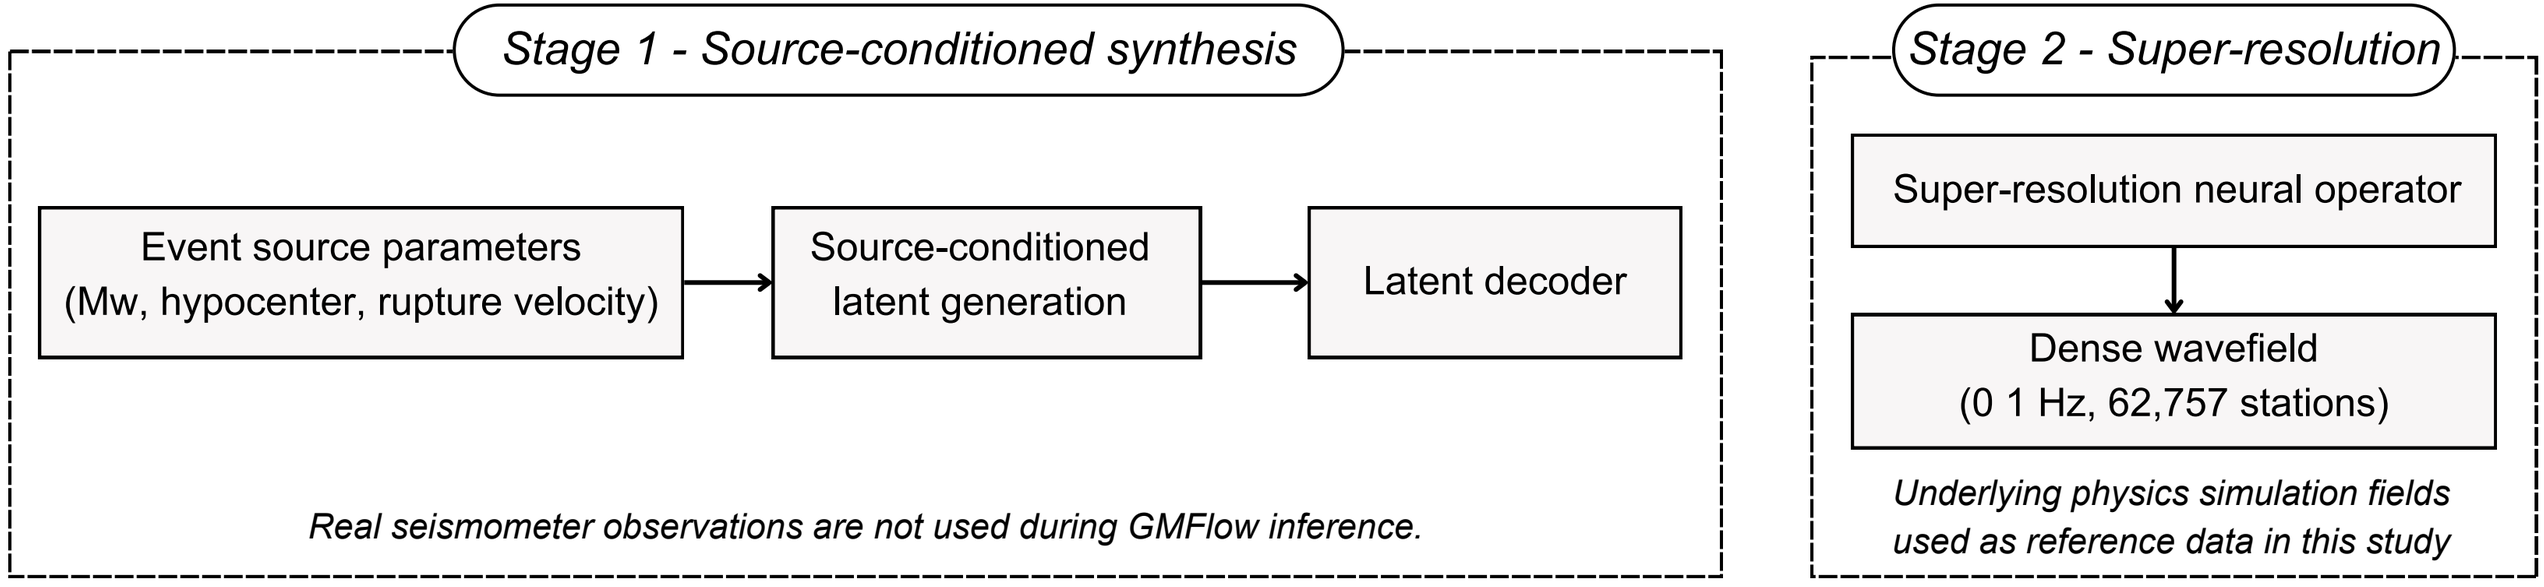

Stage 1 - Source-conditioned synthesis
Event source parameters
(Mw, hypocenter, rupture velocity)
Source-conditioned
latent generation
Latent decoder
Real seismometer observations are not used during GMFlow inference.
Stage 2 - Super-resolution
Super-resolution neural operator
Dense wavefield
(0 1 Hz, 62,757 stations)
Underlying physics simulation fields
used as reference data in this study