ECMT1V24

Common mode choke, through-hole



Product features

- Closed magnetic path reduces conductive EMI emission
- High impedance and inductance values
- Robust construction
- High voltage isolation
- Independent winding sections
- Rated voltage: 250 Vac

Applications

- Industrial IoT equipment
- Motion controls
- Power supplies
- Battery backup
- Renewable energy products
- Smart meters
- Solar/wind generators, inverters, charger controllers
- Medical equipment
- High tech consumer products
- Appliances

Environmental compliance and general specifications

- Storage temperature range (Component): -40 °C to +85 °C
- Operating temperature range: -40 °C to +125 °C (ambient plus self-temperature rise)
- Wave solder temperature: +260 °C maximum

Powering Business Worldwide

Product specifications

Part number[7]	OCL[1] (mH) minimum (1-2), (4-3)	DCR[2] (Ω) maximum (1-2), (4-3) @ +25 °C	I_{rms}[3] (A) (1-4) short 2,3	SRF (kHz) minimum	Hi-pot[4] (Vac)	Hi-pot[5] (Vac)	Insulation resistance[6] (MΩ) minimum
ECMT1V2429S-5R0-R	5.0	0.3	1.4	712	1500	1000	100
ECMT1V2429S-100-R	10	0.6	1.2	423	1500	1000	100
ECMT1V2429S-150-R	15	0.6	1.0	408	1500	1000	100
ECMT1V2429S-300-R	30	1.6	0.6	276	1500	1000	100

1. Open circuit inductance (OCL) Test parameters: 1 kHz, 0.25 Vrms, 0.0 Adc, +25 °C
2. DCR Test parameters: 4-wire method measured from the root of base, +25 °C
3. I_{rms}: Maximum DC current for an approximate temperature rise of 40 °C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed +125 °C under worst case operating conditions verified in the end application.
4. Hi-pot: Coil-Coil, 2 seconds, 5 mA
5. Hi-pot: Coil-Core, 2 seconds, 5 mA
6. Insulation Resistance: Coil-Coil and Coil-Core, at 500 Vdc
7. Part Number Definition: ECMT1Vxxxxy-zzz-R
   ECMT1V = Product code
   xxxx= Size indicator
   y= Orientation H= horizontal, S= vertical
   zzz=Inductance value in mH, R= decimal point, If no R is present last digit indicates number of zeros
   -R= RoHS compliant

Mechanical parameters, schematic, pad layout (mm)

ECMT1V2429S-xxx-R

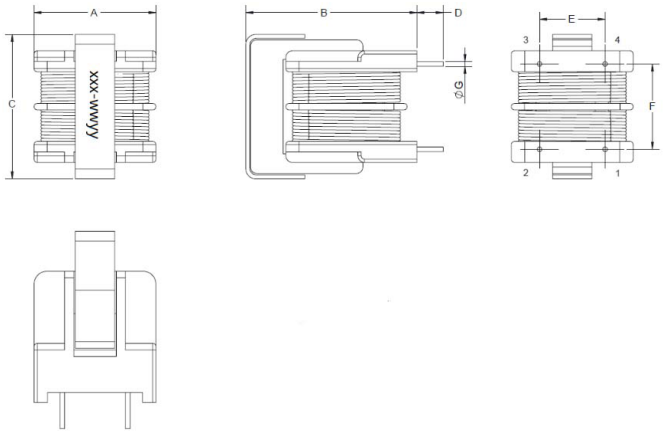

Recommended PCB layout

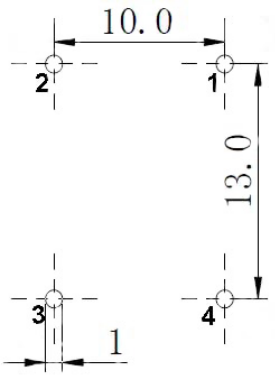

Schematic



Part number	A	B	C	D	E	F	G
ECMT1V2429S-xxx-R	20.0 max.	29.0 max.	24.0 max.	3.5 ± 0.5	10.0 ± 0.5	13.0 ± 0.5	0.7 ± 0.1

Part marking: xxx-wwyy, xxx =inductance value in mH, wwyy= lot code
Traces or vias underneath the inductor not recommended

Packaging information (mm)

ECMT1V2429S-xxx-R
Supplied in tray, 8 trays per carton. (56 parts per tray x 8 trays per box = 448 parts per carton)
(Tray height 25 mm)

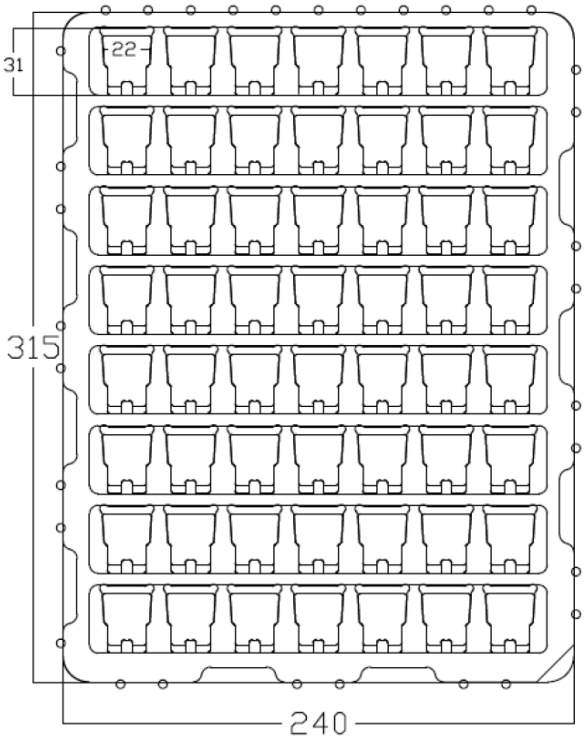

Impedance vs frequency

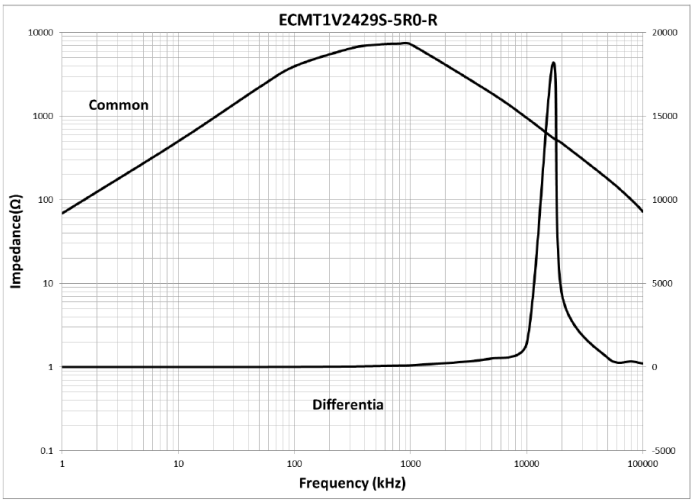

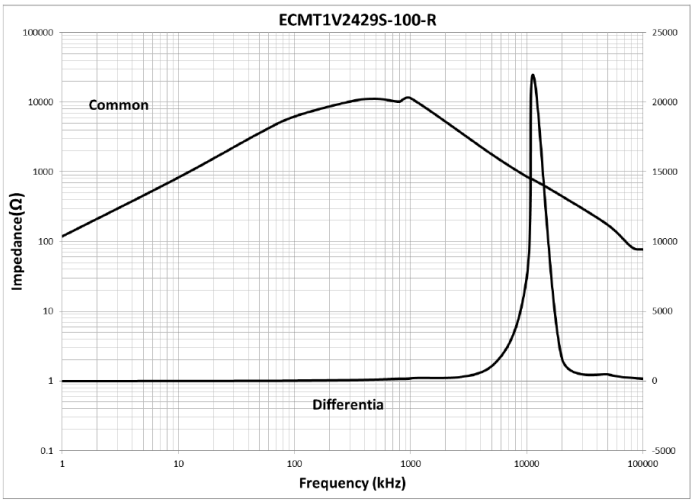

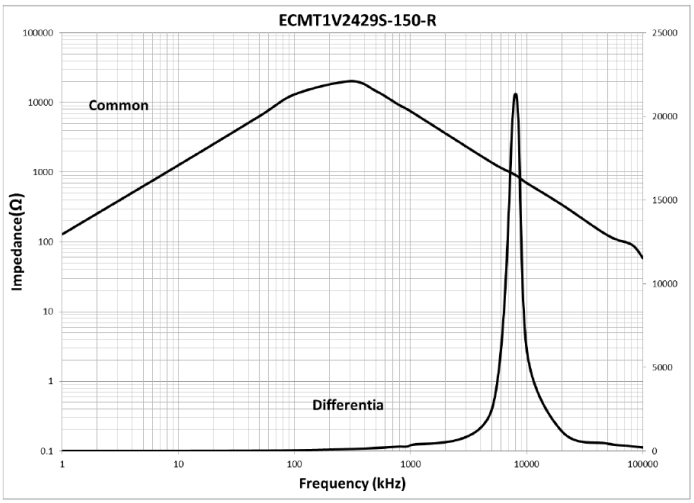

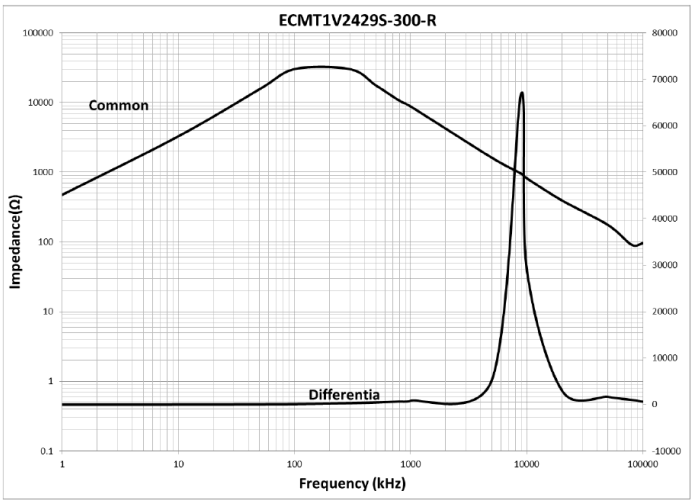

Measurement method

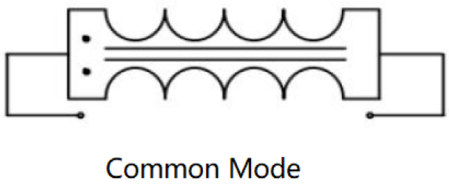

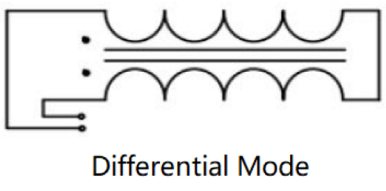

Inductance vs frequency

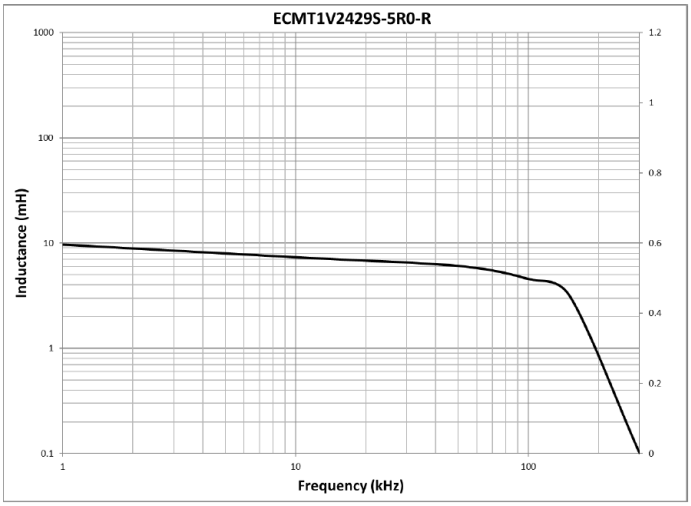

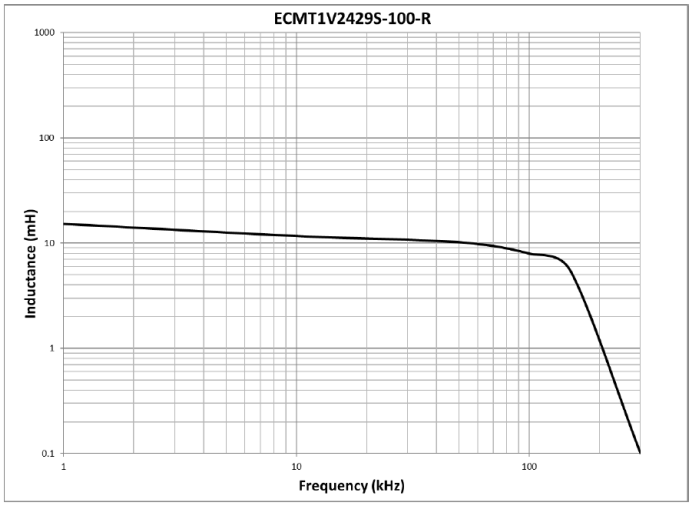

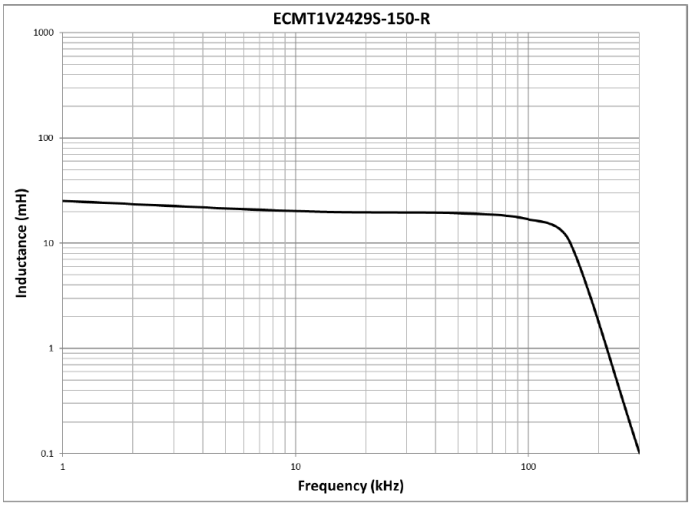

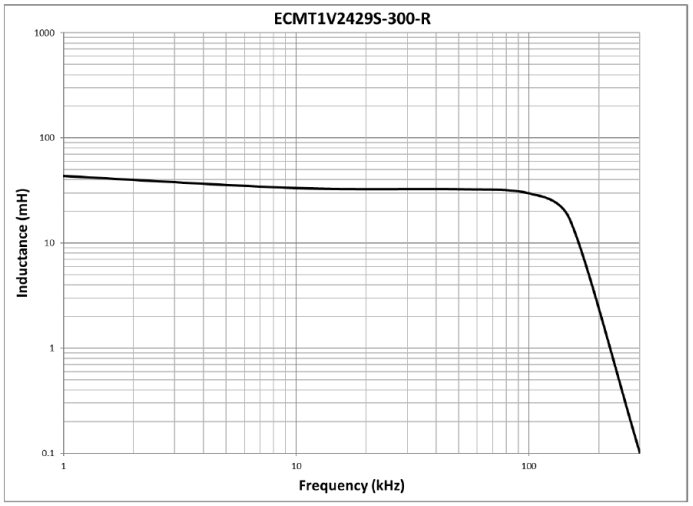

Wave solder profile

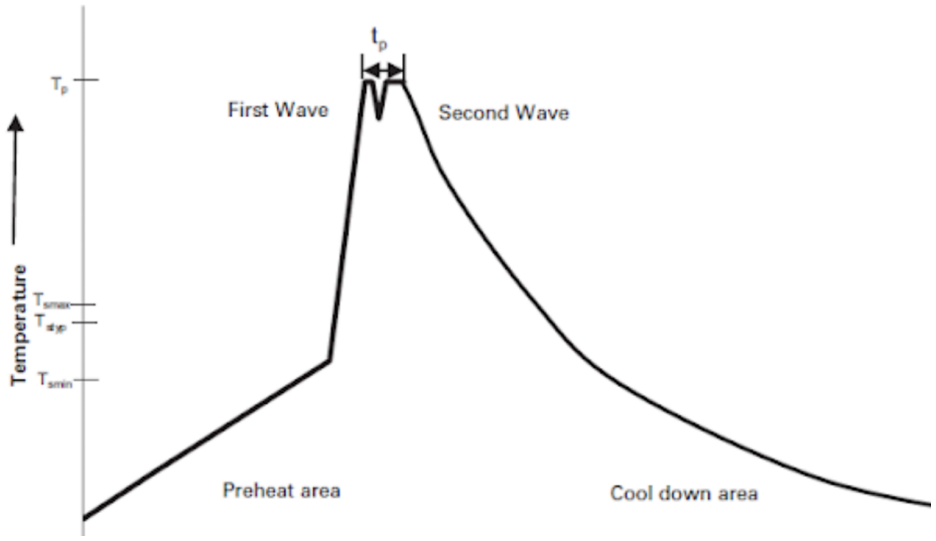

Reference EN 61760-1:2006

Profile feature		Standard SnPb solder	Lead (Pb) free solder
Preheat	• Temperature min. (T_{smin})	100 °C	100 °C
	• Temperature typ. (T_{styp})	120 °C	120 °C
	• Temperature max. (T_{smax})	130 °C	130 °C
	• Time (T_{smin} to T_{smax}) (t_s)	70 seconds	70 seconds
Δ preheat to max Temperature		150 °C max.	150 °C max.
Peak temperature (T_p)*		235 °C – 260 °C	250 °C – 260 °C
Time at peak temperature (t_p)		10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate		~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C		4 minutes	4 minutes

Manual solder

+350 °C, 4-5 seconds. (by soldering iron), generally manual, hand soldering is not recommended.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

Printed in USA
Publication No. ELX1094 BU-ELX21104
September 2021

Follow us on social media to get the latest product and support information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

ECMT1V2429S-100-R ECMT1V2429S-150-R ECMT1V2429S-300-R ECMT1V2429S-5R0-R