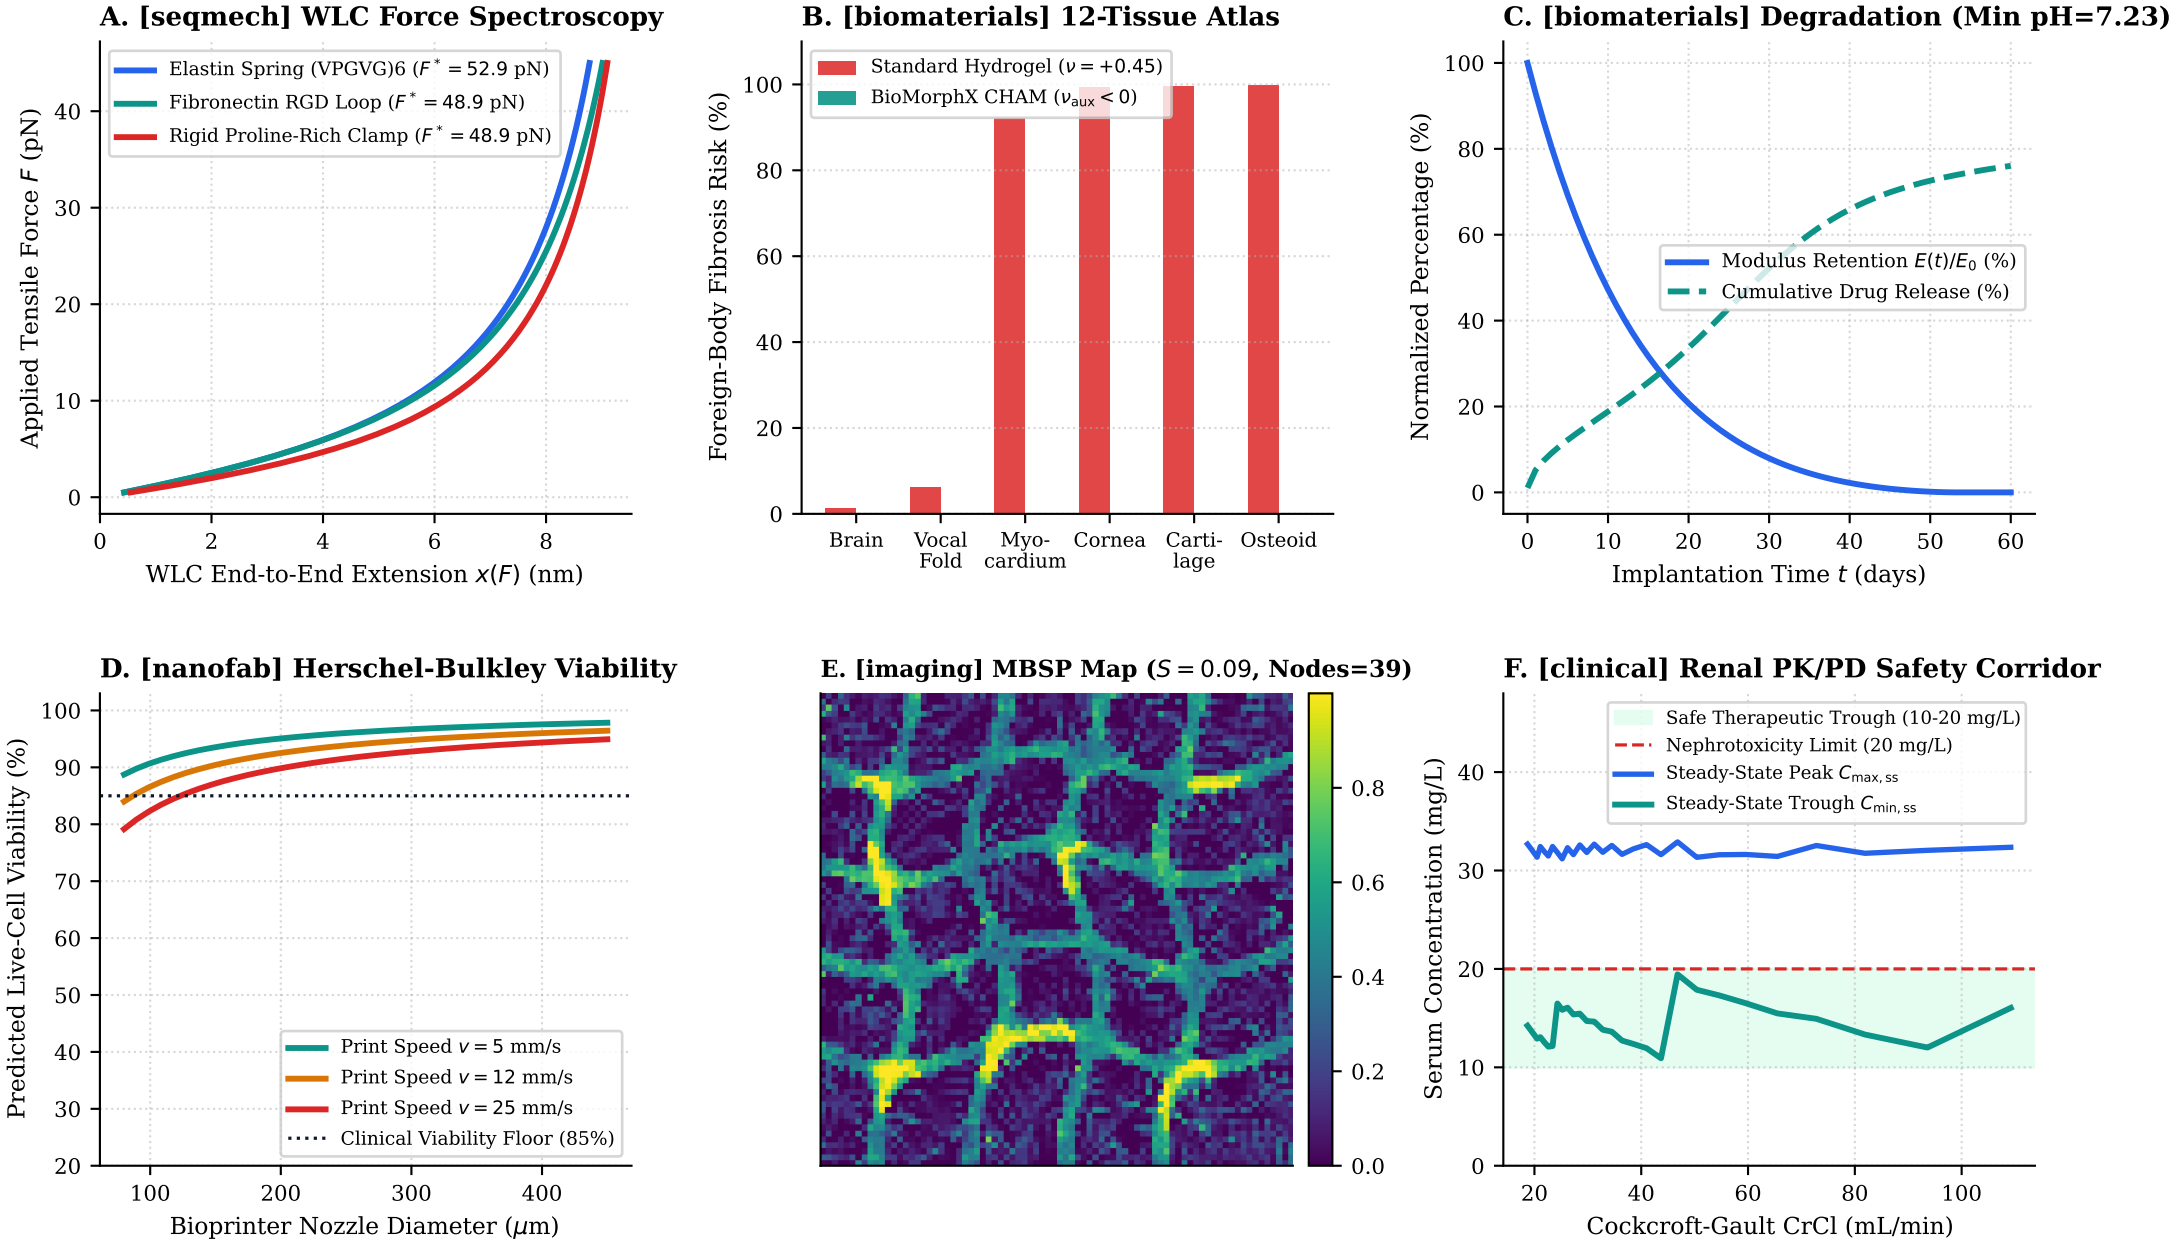

A. [seqmech] WLC Force Spectroscopy
Elastin Spring (VPGVG)6 ($F^* = 52.9$ pN)
Fibronectin RGD Loop ($F^* = 48.9$ pN)
Rigid Proline-Rich Clamp ($F^* = 48.9$ pN)
Applied Tensile Force F (pN)
WLC End-to-End Extension $x(F)$ (nm)
B. [biomaterials] 12-Tissue Atlas
Standard Hydrogel ($\nu = +0.45$)
BioMorphX CHAM ($\nu_{aux} < 0$)
Foreign-Body Fibrosis Risk (%)
Brain
Vocal Fold
Myo-cardium
Cornea
Carti-lage
Osteoid
C. [biomaterials] Degradation (Min pH=7.23)
Modulus Retention $E(t)/E_0$ (%)
Cumulative Drug Release (%)
Normalized Percentage (%)
Implantation Time t (days)
D. [nanofab] Herschel-Bulkley Viability
Print Speed $v = 5$ mm/s
Print Speed $v = 12$ mm/s
Print Speed $v = 25$ mm/s
Clinical Viability Floor (85%)
Predicted Live-Cell Viability (%)
Bioprinter Nozzle Diameter (μm)
E. [imaging] MBSP Map ($S = 0.09$, Nodes=39)
F. [clinical] Renal PK/PD Safety Corridor
Safe Therapeutic Trough (10-20 mg/L)
Nephrotoxicity Limit (20 mg/L)
Steady-State Peak $C_{max,ss}$
Steady-State Trough $C_{min,ss}$
Serum Concentration (mg/L)
Cockcroft-Gault CrCl (mL/min)