




**MOBITRUCK**  
by EdaNəKolesah.com

VARIOUS PURPOSES  
BUSINESS TRAILERS  
MANUFACTURING

# PRICE LIST

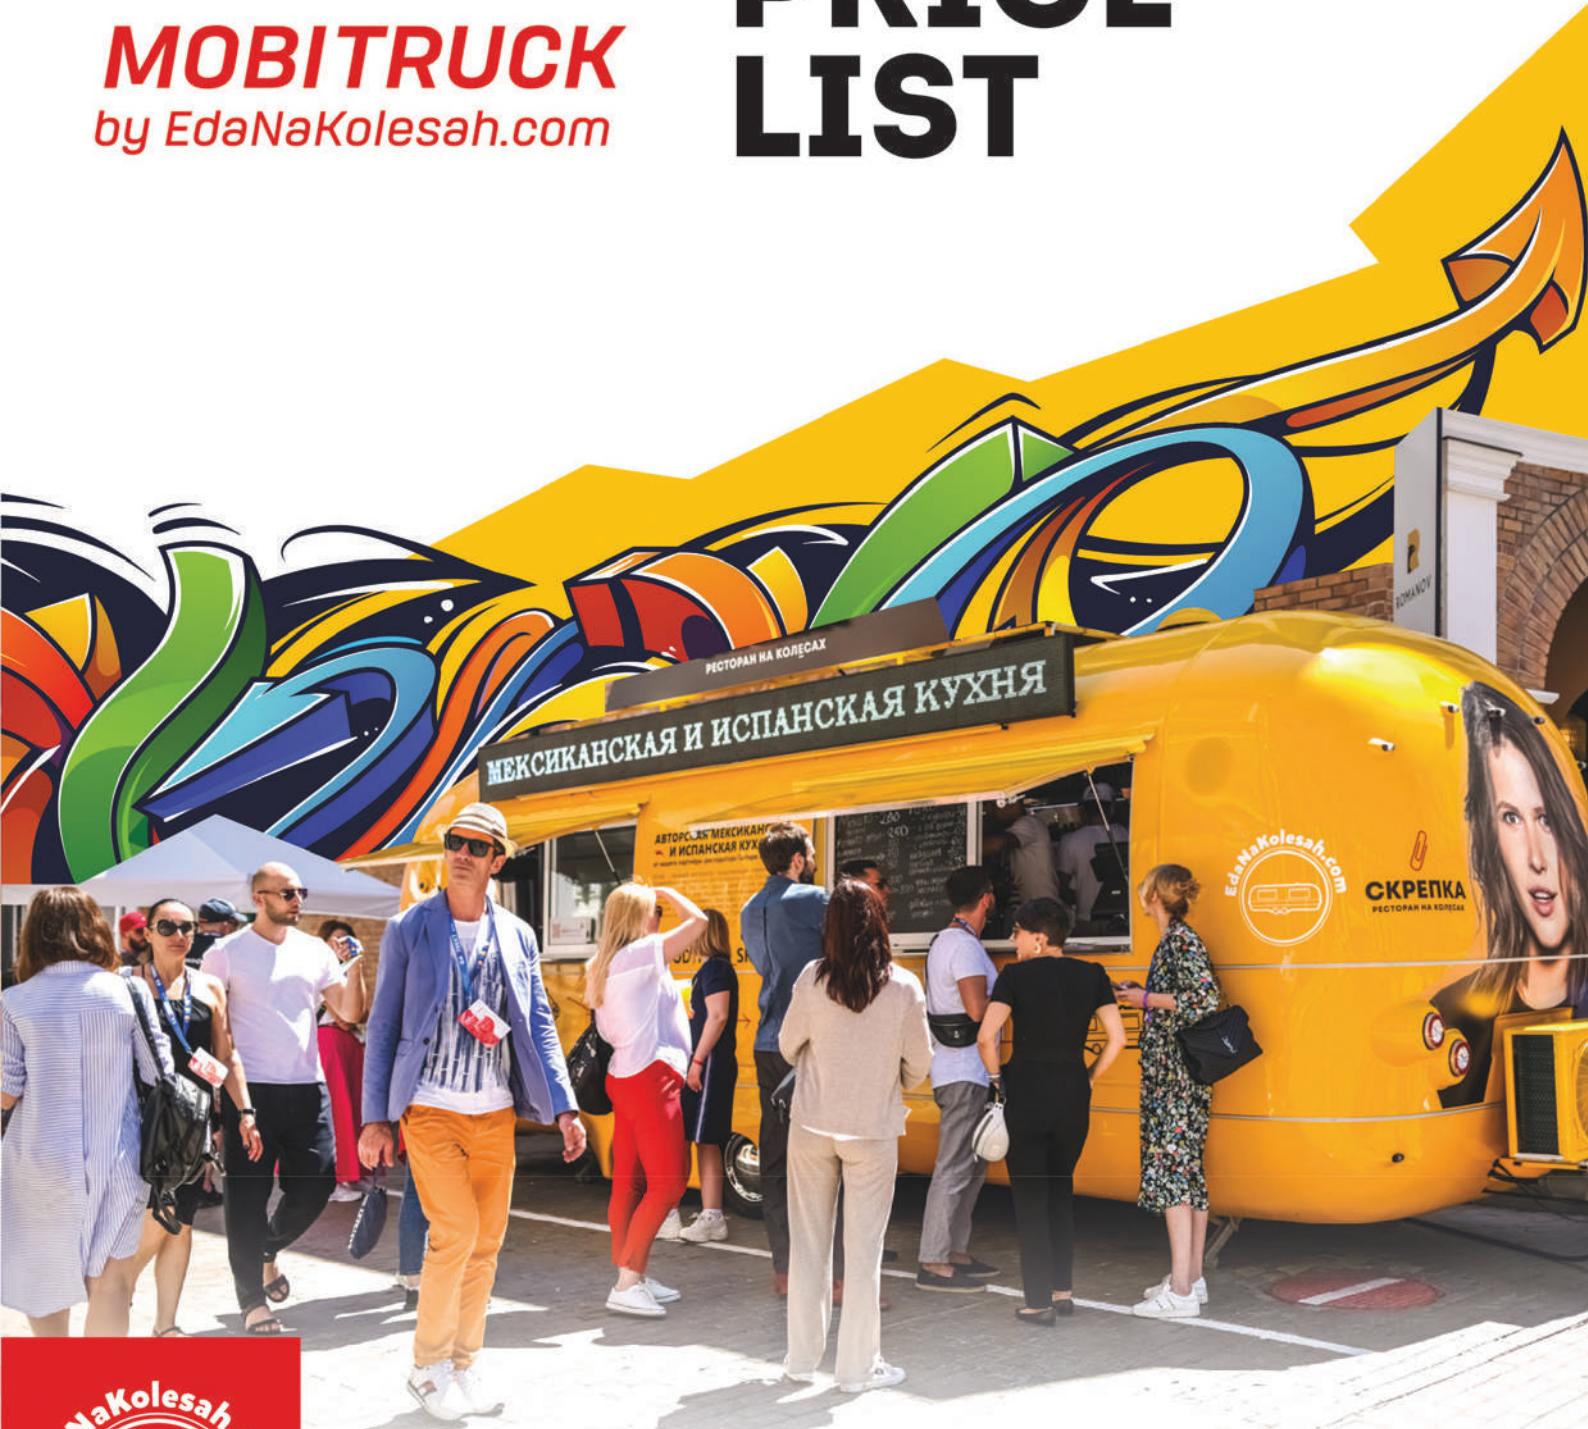

**Sk**  
Resident

**WE MAKE YOUR  
BUSINESS MOBILE**

## OUR ADVANTAGES

Concept guidance

In-house manufacturing

Worldwide supplies

High weight capacity

Low entry barriers

Maximum security

Guaranteed profitability

Easy leasing terms

Wide variety of franchise opportunities

Quick return on your investments

24/7 service support

# CONTENTS

ENK product line	4
SL product line	5
Basic configuration	7
<b>Extra options</b>	8
Shop-type windows equipment	8
Chilling and freezing equipment	9
Water, heating, air conditioning and ventilation equipment	11
Shelves, desktops, closets, others	13
Appearance and technical features	14
<b>Other options</b>	17
ENK table desk	17
Pre-order forms	18
Street Mini	23
VendingTruck	24
SL-4 "Optimum"	26



## ENK PRODUCT LINE

**ENK-8 (19 M<sup>2</sup>) ..... 29 500**



**ENK-8V (19 M<sup>2</sup>) ..... 30 750**



**ENK-6V (14 M<sup>2</sup>) ..... 28 600**


**ENK-6 (14 M<sup>2</sup>) ..... 27 900**



# STREAMLINER PRODUCT LINE




**SL-8 (21 м<sup>2</sup>) ..... 29 500**

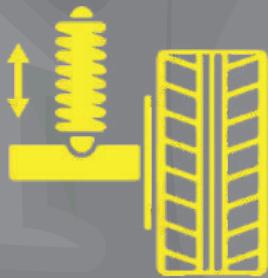

**Optional pneumatic suspension with variable road clearance**

Static: 0 mm  
Comfort: 280 mm  
Off-road: 350 mm

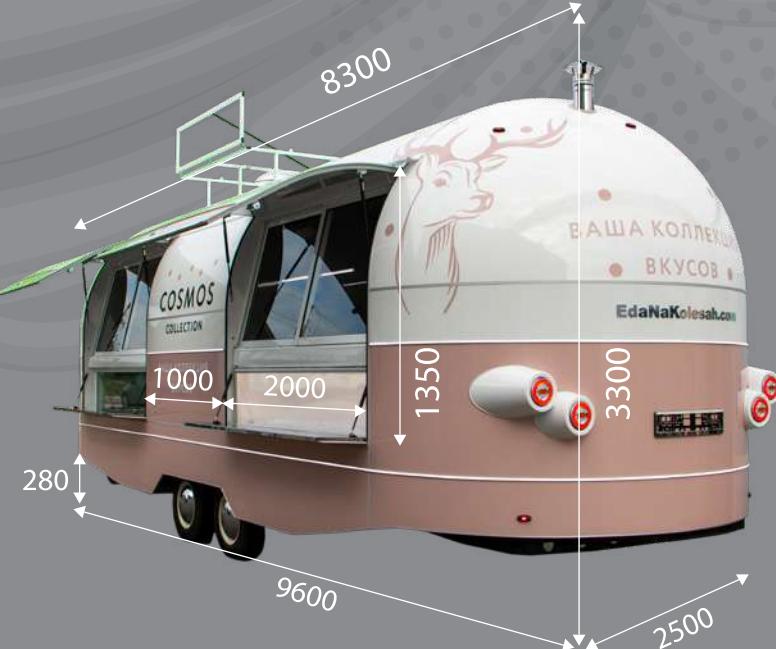


**SL-8V (21 м<sup>2</sup>) ..... 30 750**


# STREALINER PRODUCT LINE



**SL-4 (10 M<sup>2</sup>) ..... 15 500**

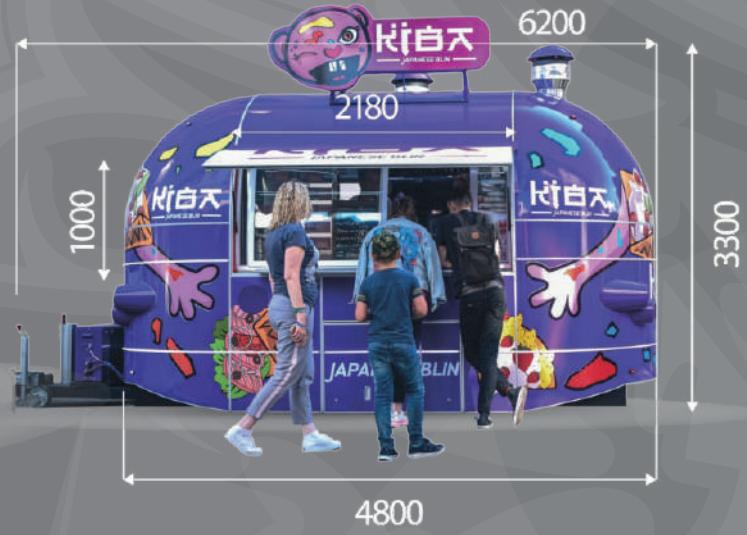


**SL-5 (12 M<sup>2</sup>) ..... 20 150**

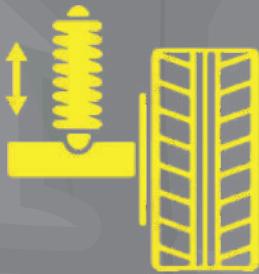

**Optional pneumatic suspension with variable road clearance**

Static: 0 mm  
Comfort: 280 mm  
Off-road: 350 mm

E-category driver's license **NOT** required

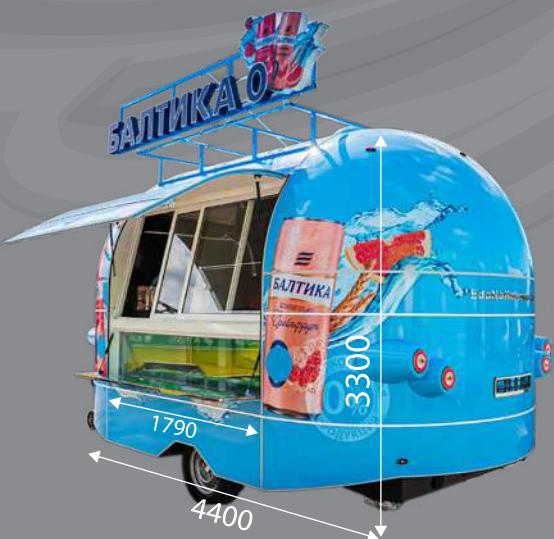

**SL-4V (10 M<sup>2</sup>) ..... 16 100**



**SL-5V (12 M<sup>2</sup>) ..... 20 800**

## BASIC CONFIGURATION

Suspension parts by AL-KO GmbH (Germany) featuring drum-type overrunning brakes and a parking brake.

Walls and ceiling interior panels made of stainless steel (AISI 430).

Corrugated aluminium floor (quintet), 50 mm thermal insulation, base surface – laminated plywood.

Maximum weight capacity - 3500 kg.

Electrical control panel with electricity meter and circuit breakers (connected individually for each power outlet group). Internal LED light strips, 2 power outlets.

## ENK

ENK-8 provides 10 fully-featured work stations. Up to 7 workers can work in ENK-6 at the same time.

Trailers are available in basic colors: red, blue or green. Other colors available at a surcharge. Paint technology is similar to car painting.

Fiberglass body (4 mm thick), operating temperature  $-50\ldots+100^{\circ}\text{C}$ . 40 mm thick nonflammable thermal insulation of walls.

2 backstores ( $2,5 \text{ m}^2$  each) with roller shutter doors.

May be equipped with clothes hangers and shelves-racks or organized as toilet, mini-office, deep-freeze chamber etc.

## SL

SL-8 provides 11 fully-featured work stations, SL-4 and SL-5 provide up to 4 work stations.

Basic body colors – red, white, black, yellow.

Body made of aluminium composite material (3 mm thick), operating temperature  $-50\ldots+100^{\circ}\text{C}$ . 40 mm nonflammable thermal insulation of walls.

Optional pneumatic suspension with variable road clearance 0...280 mm or 0...350 mm.

## EXTRA OPTIONS

 <p><b>1</b></p>	<p>Extra window for TV-panel installation (including internal box with sliding doors). Vandal-proof canopy-door. Opening mechanism with gas struts. Dimensions: width – 1100 mm, height – 640 mm. TV-panel not included.</p>	<b>1 500</b>
 <p><b>2</b></p>	<p>Safety UV-passbox Active system for transferring goods between staff and customers. Provides high level of epidemiological safety. Based on ultraviolet disinfection. System consists of food-grade stainless steel box with 2 doors and 4 UV-emission lamps. Kills up to 99,9% of germs and viruses.</p>	<b>2 650</b>

### SHOP-TYPE WINDOW EQUIPMENT

 <p><b>3</b></p>	<p>Ambient merchandise display ENK17V. 3 blind doors with latch mechanisms. Stainless steel coating panels. Mounted below the window frame. Volume – 850 liters. Triplex safety glass in front.</p>	<b>1 650</b>
 <p><b>4</b></p>	<p>Backlit snap frame in bottom cutout of enlarged window.</p>	<b>550</b>
 <p><b>5</b></p>	<p>Chalkboard in bottom cutout of enlarged window.</p>	<b>340</b>

**CHILLING AND FREEZING EQUIPMENT**

<b>6</b>	 <p>Above-zero (<math>+4\dots+6^{\circ}\text{C}</math>) cooled display shelf FreezENK17V with external DANFOSS (Denmark) refrigeration unit. 3 blind doors with latch mechanisms, thermal bridges, cooling panels. Mounted below the window frame. Volume – 850 liters. Triplex safety glass in front.</p>	<b>3 300</b>
<b>7</b>	 <p>Above-zero chiller FreezENK17 (<math>+4\dots+6^{\circ}\text{C}</math>) with external DANFOSS (Denmark) refrigeration unit. Coating material – stainless steel (AISI 430). Special features: body made of special panels, 3 thickened blind doors with latch mechanisms. Dimensions: 1930*850*700 mm. Volume – 780 liters.</p>	<b>2 750</b>
<b>8</b>	 <p>Low-temperature freezer FreezENK17 (<math>-2\dots-18^{\circ}\text{C}</math>) with external DANFOSS (Denmark) refrigeration unit. Coating material – stainless steel (AISI 430). Special features: body made of special panels, 3 thickened blind doors with latch mechanisms. Dimensions: 1930*850*700 mm. Volume – 780 liters</p>	<b>3 100</b>
<b>9</b>	 <p>Above-zero chiller FreezENK16 (<math>+4\dots+6^{\circ}\text{C}</math>) with external DANFOSS (Denmark) refrigeration unit. Coating material – stainless steel (AISI 430). Special features: body made of special panels, 2 thickened blind doors with latch mechanisms. Dimensions: 1330*850*700 mm. Volume – 550 liters.</p>	<b>2 480</b>
<b>10</b>	 <p>Low-temperature freezer FreezENK16 (<math>-2\dots-18^{\circ}\text{C}</math>) with external DANFOSS (Denmark) refrigeration unit. Coating material – stainless steel (AISI 430). Special features: made of special panels, 2 thickened blind doors with latch mechanisms. Dimensions: 1330*850*700 mm. Volume – 550 liters</p>	<b>2 670</b>

## **EXTRA OPTIONS / CHILLING AND FREEZING EQUIPMENT**



**11**

Above-zero chiller room SL-19 (+2...+6 °C) in trailer's hemisphere, volume up to 4000 liters.  
External DANFOSS (Denmark) refrigeration unit mounted on towbar. Extra thermal insulation of compartment, wall with thermoinsulated door, thermal sensors, control panel.

**5 370**

**12**

Low-temperature freezing room SL-19 (-10...-18 °C) in trailer's hemisphere, volume up to 4000 liters.  
External DANFOSS (Denmark) refrigeration unit mounted on towbar. Extra thermal insulation of compartment, wall with thermoinsulated door, thermal sensors, control panel.

**6 400**

**13**

Above-zero chiller FreezSL-19 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit. Coating material – stainless steel (AISI 430). Special features: installed into SL-models hemisphere, body made of special panels, 2 thickened blind doors with latch mechanisms.  
Volume – 700 liters  
**Only for SL-models.**

**2 500**

**14**

Low-temperature freezer FreezSL-19 (-2...-18 °C) with external DANFOSS (Denmark) refrigeration unit. Coating material – stainless steel (AISI 430).  
Special features: installed into SL-models hemisphere, body made of special panels, 2 thickened blind doors with latch mechanisms.  
Volume – 700 liters  
**Only for SL-models.**

**2 690**

**15**

Above-zero chiller SL-15 (+4... +6°C) with external DANFOSS (Denmark) refrigeration unit. Coating material – stainless steel (AISI 430).  
Special features: body made of special panels, thickened blind door with latch mechanism.  
Volume – 200 liters.

**1 720**

**16**

Low-temperature freezer SL-15 (+4... +6°C) with external DANFOSS (Denmark) refrigeration unit. Coating material – stainless steel (AISI 430).  
Special features: body made of special panels, thickened blind door with latch mechanism.  
Volume – 200 liters.

**2 110**

**17**


Installation of customer-provided chilling or freezing equipment (per unit)

**190**

**VENTILATION, CLIMATE, HEATING, WATER**

<b>18</b>		Welded wall-mounted stainless steel ventilation exhaust hood with tunnel-type grease traps and 2 grease drains (motor not included). Material – stainless steel (AISI 430), argon-arc welding. Mushroom-head roof exhaust pipe painted in trailer's body color. Hood width – 1000 mm.	<b>1 030</b>	
<b>19</b>		Hood width – 1315 mm.	<b>1 170</b>	
<b>20</b>		Hood width – 2000 mm.	<b>1 440</b>	
<b>21</b>		Increased-overhang (1200 mm) welded wall-mounted stainless steel ventilation exhaust hood with tunnel-type grease traps and 2 grease drains (motor not included). Material – stainless steel (AISI 430), argon-arc welding. Hood width – 1000 mm.	<b>1 200</b>	
<b>22</b>		Hood width – 1315 mm.	<b>1 470</b>	
<b>23</b>		Hood width – 2000 mm.	<b>1 750</b>	
<b>24</b>	Non-adjustable exhaust hood motor. Performance – 1600 m <sup>3</sup> /hour.			<b>220</b>
<b>25</b>	Adjustable low-noise exhaust hood motor (made in Sweden). Performance – 1033 m <sup>3</sup> /hour.			<b>560</b>
<b>26</b>	Adjustable high-temperature (400 °C) exhaust hood motor. Performance – 2600 m <sup>3</sup> /hour.			<b>2 080</b>
<b>27</b>		Advanced on-roof exhaust system. Auxiliary grease tank on the roof. Electrically heated grease channel.	<b>940</b>	
<b>28</b>		Inflow or exhaust ceiling-mounted ventilation box with motor installed in backstore. Non-adjustable motor. Performance – 1800 m <sup>3</sup> /hour. 3 or more adjustable zones of air inflow/exhaust.	<b>920</b>	

## **EXTRA OPTIONS / VENTILATION, CLIMATE, HEATING, WATER**
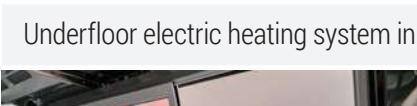
<b>29</b>		Wall-mounted air conditioning set. Outdoor unit painted into trailer's body color. Heating mode (during outside temperature higher than -15°C). Effective area up to 30 m <sup>2</sup> .	<b>1 640</b>
<b>30</b>		Effective area up to 60 m <sup>2</sup> .	<b>2 030</b>
<b>31</b>		Thermal air curtain for installation above window or door frame. Adjustable operating mode.	<b>340</b>
<b>32</b>	Underfloor electric heating system in trailer's main space.		<b>1 330</b>
<b>33</b>		Single sliding glass unit in aluminum casement.	<b>280</b>
<b>34</b>		Double sliding glass unit in aluminum casement.	<b>400</b>
<b>35</b>		Water supply system. Dual kitchen sink with mixer tap built-in into the desktop. Direct-flow water heater, power – 1.5 kW. Electric pump, pressure – 1.5 bar.	<b>950</b>
<b>36</b>		Connector for external water source and drainage, bypass system.	<b>310</b>

## **EXTRA OPTIONS / SHELVES, DESKTOPS, CLOSETS, OTHERS**

**37** Water tanks for clean water (40 l) and waste water (40 l) installed under the sink. **125**

**38** Water tanks for clean water (125 l) and waste water (125 l) built in underfloor space. Ready for treatment according to Russian Sanitary Norms and Regulations. Electric anti-icing system (heated wire around tank and pipes). **1 780**

## **SHELVES, DESKTOPS, CLOSETS, OTHERS**

**39**  Wall-mounted skirted shelves made of stainless steel (AISI 430) around the entire trailer's circumference above desktops.  
Depth – 400 mm. **610**

**40**  Second row of wall-mounted skirted shelves made of stainless steel (AISI 430).  
Depth – 200 mm. **490**

**41**  Sheeting the hemisphere with stainless steel (AISI 430).  
Extra desktop on welded frame in hemisphere. **1 860**

**42** Storage racks with shelves in hemisphere (stockroom). **250**

## EXTRA OPTIONS / APPEARANCE AND TECHNICAL FEATURES


**43**



Tabletops made of stainless steel around entire trailer's circumference.

**1 520**

**44**

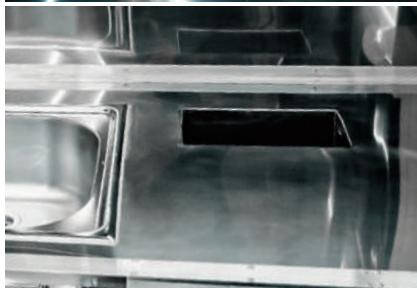

Garbage hole in tabletop.

**270**

**45**

Clothes hanger in hemispher.

**20**

**46**



Chemical toilet in hemisphere.  
Welded frame, space separation, walls facing.

**2 450**

**47**



Extra openable window on door side. Dimensions:  
2000\*850 mm.

**1 640**

## APPEARANCE AND TECHNICAL FEATURES

**48**



Installation of 18 220V power sockets and 2 extra 380V high-power sockets (14 kW each).  
Total sockets count – 20.  
Allocation according to customer's requirements.

**1 200**

**49**

External waterproof 220V power outlet on trailer's body.

**140**

**50**

Custom body painting according to customer's template.

**1 330**

## **EXTRA OPTIONS / APPEARANCE AND TECHNICAL FEATURES**

- 51** Covering trailer body with triple-layer varnish-coating with Xirallie (R) for extra color depth. **1 360**



- 52** LED strip around trailer body (multiple strips installation possible). **530**



- 53** Rooftop advertising light box frame (hermetic sealing of frame mount and power supply). Retractable during trailer transportation. Light box not included. **640**



- 54** Installation of 2 waterproof amplified Bluetooth loudspeakers. Grills painted in trailer's body main color. **830**



- 55** Installation of CCTV system with cameras inside and outside of trailer including video-recorder and 1 Tb hard-disk. Internet connection kit included (WiFi-router, 3G/4G modem, installed in plastic case in hemisphere). Ready for real-time viewing and cloud recording. iOS and Android support. 2 cameras. **1 330**

- 56** 4 cameras. **1 760**

- 57** Internet connection kit (WiFi-router, 3G/4G USB-modem non sim-locked, configuration. Coding and configuration of self-restart script). Equipment is installed in plastic box in hemisphere. **440**

## **EXTRA OPTIONS / ВНЕШНИЙ ВИД И ТЕХНИКА**

**58**

Alarm system (Internet connection kit required). Installation of wireless GSM alarm kit (2 door sensors, motion detector, control console, alarm horn, smoke and CO detector). Remote control with iOS and Android applications. Separate zones security available. Mobile push-notes and alarm horn sound in case of emergency.

**1 340**

**59**



Gasoline power station, from 3 to 21 kW.  
Soundproof silent-box, ventilation, exhaust system.  
Installed into backstore.

**from 4 150**


**60**



Door for hemisphere backstore (instead of roller shutter door). Extra thermal and noise insulation for lowering power station noise.

**340**

**61**

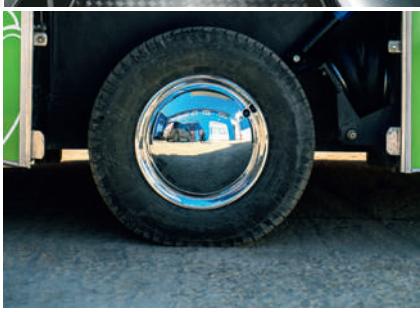

Monoaxial pneumatic suspension system. Variable road clearance 0...350 mm.  
**For SL-models only**

**3 450**

**62**



Biaxial pneumatic suspension system. Variable road clearance 0...280 mm.  
**For SL-models only**

**5 620**

## EXTRA OPTIONS / ENK TABLE

# OTHER OPTIONS

Installation of large-sized heating equipment.

Calculated  
individually

Vehicle registration at Moscow road authorities.

625


## ENK TABLE



A part of real body of «EdaNaKolesah.com» trailer. Equipped with real lights and LED-strips. May be used as a reception desk, promo-desk, bar counter, DJ table etc. Equipped with built-in shelves and doors, 3 internal 220V sockets.  
Dimensions: width 2.6 m, depth 1.2 m, height 1.3 m. Weight: 180 kg.


4 100

## PRE-ORDER FORM FOR ENK-8

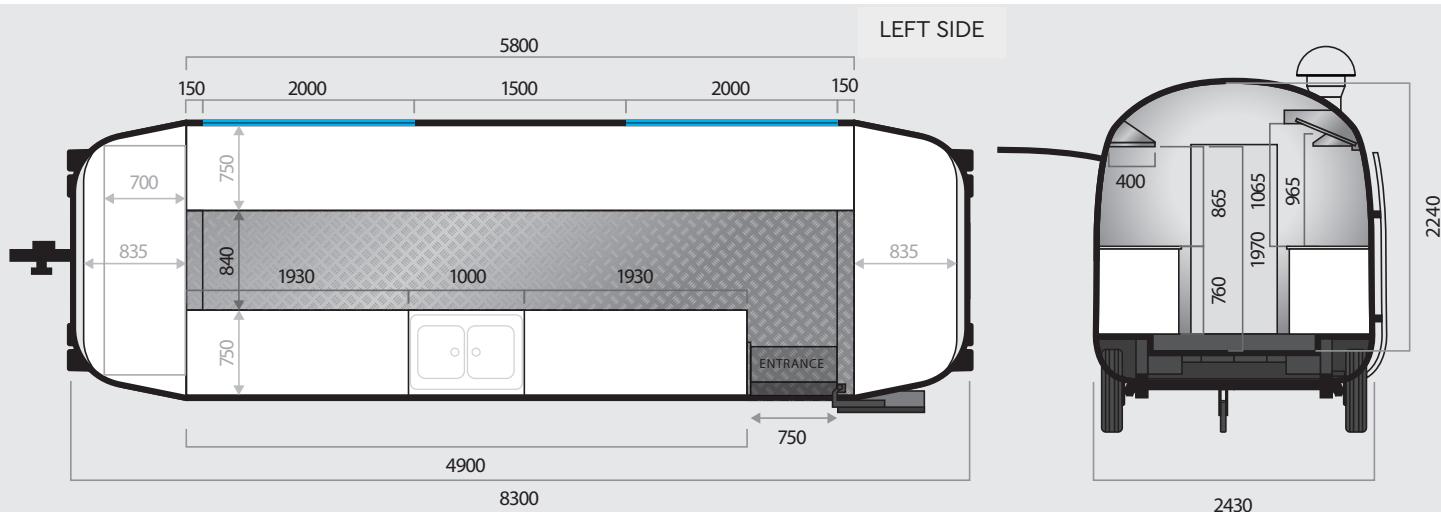


- |           |   |           |  |
|-----------|---|-----------|--|
| <b>1</b>  | Extra window for TV-panel installation, internal box with sliding doors.  | <b>30</b> | Wall-mounted air conditioning set. Effective area up to 60 m <sup>2</sup> .  |
| <b>2</b>  | Ambient merchandise display ENK17V in bottom cutout of shop-type window.  | <b>31</b> | Thermal air curtain above window or door frame.  |
| <b>3</b>  | Backlit snap-frame for menu in bottom cutout of shop-type window.   | <b>32</b> | Underfloor electric heating system in trailer's main space.  |
| <b>4</b>  | Chalkboard in bottom cutout of shop-type window.  | <b>33</b> | Single sliding glass unit in aluminum casement.  |
| <b>5</b>  | Safety UV-passbox   | <b>34</b> | Double sliding glass unit in aluminum casement.  |
| <b>6</b>  | Chilled merchandise display (+4...+6 °C) FreezENK17V in bottom cutout of shop-type window with external DANFOSS (Denmark) refrigeration unit. | <b>35</b> | Dual kitchen sink with mixer tap for cold and hot water.   |
| <b>7</b>  | Undercounter refrigerator FreezENK17 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit  | <b>36</b> | Connector for external water source and drainage.  |
| <b>8</b>  | Undercounter freezer FreezENK17 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit   | <b>37</b> | Water tanks for clean water (40 liters) and waste water (40 liters).   |
| <b>9</b>  | Undercounter refrigerator FreezENK16 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit  | <b>38</b> | Water tanks for clean water (125 liters) and waste water (125 liters).   |
| <b>10</b> | Undercounter freezer FreezENK16 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit   | <b>39</b> | Wall-mounted skirted shelves around the entire trailer's circumference (where feasible)above desktops. Depth – 400 mm. |
| <b>11</b> | Above-zero chiller room SL-19 (+2...+6 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit                                   | <b>40</b> | Second row of skirted shelves. Depth – 200 mm.   |
| <b>12</b> | Low-temperature freezing room SL-19 (-10...-18 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit                           | <b>41</b> | Sheeting hemisphere's internal surface with stainless steel. Installing a desktop into hemisphere.                     |
| <b>15</b> | Undercounter refrigerator SL15 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit  | <b>42</b> | Storage racks with shelves in hemisphere (stockroom).  |
| <b>16</b> | Undercounter freezer SL15 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit   | <b>43</b> | Tabletops made of stainless steel around entire trailer's circumference.   |
| <b>17</b> | Installation of customer-provided chilling or freezing equipment  | <b>44</b> | Garbage hole in tabletop.  |
| <b>18</b> | <b>Exhaust motor not included.</b><br>Hood width - 1000 mm.   | <b>45</b> | Clothes hanger installed into hemisphere.  |
| <b>19</b> | Hood width - 1315 mm.   | <b>46</b> | Chemical toilet in trailer's hemisphere.   |
| <b>20</b> | Hood width - 2000 mm.   | <b>47</b> | Extra openable window on door side.  |
| <b>21</b> | Increased-overhang (1200 mm) welded wall-mounted stainless steel ventilation exhaust hood. <b>Exhaust motor not included.</b>                 | <b>48</b> | Extra power outlets (18 * 220V and 2 * 380V).  |
| <b>22</b> | Hood width - 1315 mm.   | <b>49</b> | External waterproof 220V power outlet on trailer's body.   |
| <b>23</b> | Hood width - 2000 mm.   | <b>50</b> | Custom body painting according to customer's template.   |
| <b>24</b> | Non-adjustable exhaust hood motor. Performance – 1600 m <sup>3</sup> /hour.   | <b>51</b> | Triple-layer varnish-coating with Xirallic (R).  |
| <b>25</b> | Adjustable low-noise exhaust hood motor (made in Sweden).<br>Performance – 1033 m <sup>3</sup> /hour.   | <b>52</b> | LED strip around trailer body.   |
| <b>26</b> | Adjustable high-temperature (400°C) exhaust hood motor.<br>Performance – 2600 m <sup>3</sup> /hour.   | <b>53</b> | Retractable rooftop frame for lightbox.  |
| <b>27</b> | Improved on-roof exhaust system.  | <b>54</b> | Waterproof amplified Bluetooth stereo loudspeakers.  |
| <b>28</b> | Inflow or exhaust ceiling-mounted ventilation box with motor installed in backstore. 3 or more adjustable zones of air inflow/exhaust.        | <b>55</b> | CCTV system, including video-recorder and 1Tb hard-disk. 2 cameras.  |
| <b>29</b> | Wall-mounted air conditioning set.<br>Effective area up to 30 m <sup>2</sup> .  | <b>56</b> | CCTV system. 4 cameras.  |
|           |   | <b>57</b> | Internet connection kit.   |
|           |   | <b>58</b> | Alarm system kit.  |
|           |   | <b>59</b> | Integrated gasoline power station (from 3 kW to 21 kW)   |
|           |   | <b>60</b> | Door for hemisphere backstore (instead of roller shutter) for reduction of generator noise.                            |

## PRE-ORDER FORM FOR ENK-6

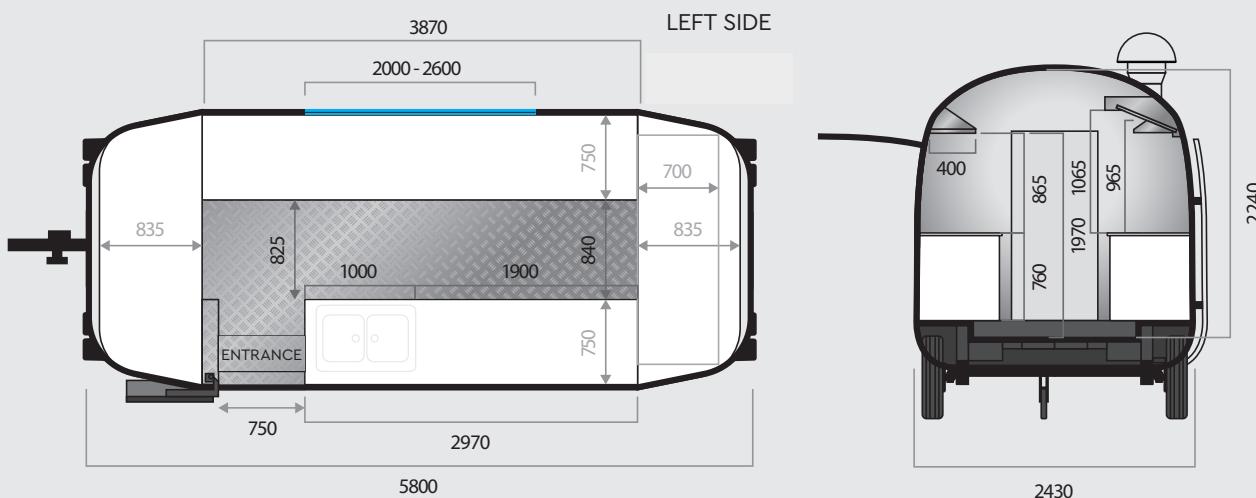


- |           |   |           |   |
|-----------|---|-----------|---|
| <b>2</b>  | Ambient merchandise display ENK17V in bottom cutout of shop-type window.  | <b>30</b> | Wall-mounted air conditioning set.<br>Effective area up to 60 m <sup>2</sup> .  |
| <b>3</b>  | Backlit snap-frame for menu in bottom cutout of shop-type window.   | <b>31</b> | Thermal air curtain above window or door frame.   |
| <b>4</b>  | Chalkboard in bottom cutout of shop-type window.  | <b>32</b> | Underfloor electric heating system in trailer's main space.   |
| <b>5</b>  | Safety UV-passbox   | <b>33</b> | Single sliding glass unit in aluminum casement.   |
| <b>6</b>  | Chilled merchandise display (+4...+6 °C) FreezENK17V in bottom cutout of shop-type window with external DANFOSS (Denmark) refrigeration unit.             | <b>34</b> | Double sliding glass unit in aluminum casement.   |
| <b>7</b>  | Undercounter refrigerator FreezENK17 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit  | <b>35</b> | Dual kitchen sink with mixer tap for cold and hot water.  |
| <b>8</b>  | Undercounter freezer FreezENK17 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit   | <b>36</b> | Connector for external water source and drainage.   |
| <b>9</b>  | Undercounter refrigerator FreezENK16 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit  | <b>37</b> | Water tanks for clean water (40 liters) and waste water (40 liters).  |
| <b>10</b> | Undercounter freezer FreezENK16 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit   | <b>39</b> | Wall-mounted skirted shelves around the entire trailer's circumference (where feasible) above desktops. Depth – 400 mm. |
| <b>11</b> | Above-zero chiller room SL19 (+2...+6 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit  | <b>40</b> | Second row of skirted shelves. Depth – 200 mm.  |
| <b>12</b> | Low-temperature freezing room SL19 (-10...-18 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit  | <b>41</b> | Sheeting hemisphere's internal surface with stainless steel. Installing a desktop into hemisphere.                      |
| <b>15</b> | Undercounter refrigerator SL15 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit  | <b>42</b> | Storage racks with shelves in hemisphere (stockroom).   |
| <b>16</b> | Undercounter freezer SL15 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit   | <b>43</b> | Tabletops made of stainless steel around entire trailer's circumference.  |
| <b>17</b> | Installation of customer-provided chilling or freezing equipment  | <b>44</b> | Garbage hole in tabletop.   |
| <b>18</b> | Welded wall-mounted stainless steel ventilation exhaust hood.<br><b>Exhaust motor not included.</b><br>Hood width - 1000 mm.                              | <b>45</b> | Clothes hanger installed into hemisphere.   |
| <b>19</b> | Hood width - 1315 mm.   | <b>46</b> | Chemical toilet in trailer's hemisphere.  |
| <b>20</b> | Hood width - 2000 mm.   | <b>47</b> | Extra openable window on door side.   |
| <b>21</b> | Increased-overhang (1200 mm) welded wall-mounted stainless steel ventilation exhaust hood.<br><b>Exhaust motor not included.</b><br>Hood width - 1000 mm. | <b>48</b> | Extra power outlets (18 * 220V and 2 * 380V).   |
| <b>22</b> | Hood width - 1315 mm.   | <b>49</b> | External waterproof 220V power outlet on trailer's body.  |
| <b>23</b> | Hood width - 2000 mm.   | <b>50</b> | Custom body painting according to customer's template.  |
| <b>24</b> | Non-adjustable exhaust hood motor. Performance – 1600 m <sup>3</sup> /hour.   | <b>51</b> | Triple-layer varnish-coating with Xiralic (R).  |
| <b>25</b> | Adjustable low-noise exhaust hood motor (made in Sweden).<br>Performance – 1033 m <sup>3</sup> /hour.   | <b>52</b> | LED strip around trailer body.  |
| <b>26</b> | Adjustable high-temperature (400°C) exhaust hood motor.<br>Performance – 2600 m <sup>3</sup> /hour.   | <b>53</b> | Retractable rooftop frame for lightbox.   |
| <b>27</b> | Improved on-roof exhaust system.  | <b>54</b> | Waterproof amplified Bluetooth stereo loudspeakers.   |
| <b>28</b> | Inflow or exhaust ceiling-mounted ventilation box with motor installed in backstore. 3 or more adjustable zones of air inflow/exhaust.                    | <b>55</b> | CCTV system, including video-recorder and 1Tb hard-disk. 2 cameras.   |
| <b>29</b> | Wall-mounted air conditioning set.<br>Effective area up to 30 m <sup>2</sup> .  | <b>56</b> | CCTV system. 4 cameras.   |
|           |   | <b>57</b> | Internet connection kit.  |
|           |   | <b>58</b> | Alarm system kit.   |
|           |   | <b>59</b> | Integrated gasoline power station (from 3 kW to 21 kW)  |
|           |   | <b>60</b> | Door for hemisphere backstore (instead of roller shutter) for reduction of generator noise.                             |

## PRE-ORDER FORM FOR SL-8

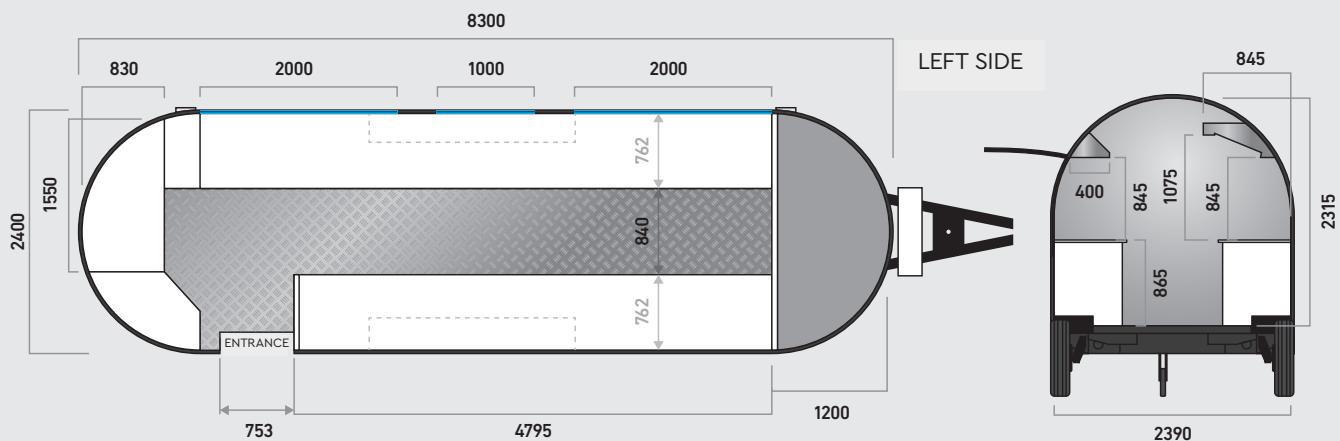


- |           |   |           |  |
|-----------|---|-----------|--|
| <b>1</b>  | Extra window for TV-panel installation, internal box with sliding doors.  | <b>27</b> | Improved on-roof exhaust system.   |
| <b>2</b>  | Ambient merchandise display ENK17V in bottom cutout of shop-type window.  | <b>28</b> | Inflow or exhaust ceiling-mounted ventilation box with motor installed in backstore. 3 or more adjustable zones of air inflow/exhaust. |
| <b>3</b>  | Backlit snap-frame for menu in bottom cutout of shop-type window.   | <b>29</b> | Wall-mounted air conditioning set. Effective area up to 30 m <sup>2</sup> .  |
| <b>4</b>  | Chalkboard in bottom cutout of shop-type window.  | <b>30</b> | Wall-mounted air conditioning set. Effective area up to 60 m <sup>2</sup> .  |
| <b>5</b>  | Safety UV-passbox   | <b>31</b> | Thermal air curtain above window or door frame.  |
| <b>6</b>  | Chilled merchandise display (+4...+6 °C) FreezENK17V in bottom cutout of shop-type window with external DANFOSS (Denmark) refrigeration unit. | <b>32</b> | Underfloor electric heating system in trailer's main space.  |
| <b>7</b>  | Undercounter refrigerator FreezENK17 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit  | <b>33</b> | Single sliding glass unit in aluminum casement.  |
| <b>8</b>  | Undercounter freezer FreezENK17 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit   | <b>35</b> | Dual kitchen sink with mixer tap for cold and hot water.   |
| <b>9</b>  | Undercounter refrigerator FreezENK16 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit  | <b>36</b> | Connector for external water source and drainage.  |
| <b>10</b> | Undercounter freezer FreezENK16 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit   | <b>37</b> | Water tanks for clean water (40 liters) and waste water (40 liters).   |
| <b>11</b> | Above-zero chiller room SL-19 (+2...+6 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit                                   | <b>39</b> | Wall-mounted skirted shelves around the entire trailer's circumference (where feasible) above desktops. Depth – 400 mm.                |
| <b>12</b> | Low-temperature freezing room SL-19 (-10...-18 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit                           | <b>40</b> | Second row of skirted shelves. Depth – 200 mm.   |
| <b>13</b> | Undercounter refrigerator FreezSL-19 (+4...+6 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit                            | <b>43</b> | Tabletops made of stainless steel around entire trailer's circumference.   |
| <b>14</b> | Undercounter freezer FreezSL-19 (-4...-16, -18 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit                           | <b>44</b> | Garbage hole in tabletop.  |
| <b>15</b> | Undercounter refrigerator SL15 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit  | <b>45</b> | Clothes hanger installed into hemisphere.  |
| <b>16</b> | Undercounter freezer SL15 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit   | <b>46</b> | Chemical toilet in trailer's hemisphere.   |
| <b>17</b> | Installation of customer-provided chilling or freezing equipment  | <b>47</b> | Extra openable window on door side.  |
| <b>18</b> | <b>Exhaust motor not included.</b><br>Hood width - 1000 mm.   | <b>48</b> | Extra power outlets (18 * 220V and 2 * 380V).  |
| <b>19</b> | Hood width - 1315 mm.   | <b>49</b> | External waterproof 220V power outlet on trailer's body.   |
| <b>20</b> | Hood width - 2000 mm.   | <b>52</b> | LED strip around trailer body.   |
| <b>21</b> | Increased-overhang (1200 mm) welded wall-mounted stainless steel ventilation exhaust hood.<br><b>Exhaust motor not included.</b>              | <b>53</b> | Retractable rooftop frame for lightbox.  |
| <b>22</b> | Hood width - 1315 mm.   | <b>54</b> | Waterproof amplified Bluetooth stereo loudspeakers.  |
| <b>23</b> | Hood width - 2000 mm.   | <b>55</b> | CCTV system, including video-recorder and 1Tb hard-disk. 2 cameras.  |
| <b>24</b> | Non-adjustable exhaust hood motor. Performance – 1600 m <sup>3</sup> /hour.   | <b>56</b> | CCTV system. 4 cameras.  |
| <b>25</b> | Adjustable low-noise exhaust hood motor (made in Sweden). Performance – 1033 m <sup>3</sup> /hour.  | <b>57</b> | Internet connection kit.   |
| <b>26</b> | Adjustable high-temperature (400°C) exhaust hood motor. Performance – 2600 m <sup>3</sup> /hour.  | <b>58</b> | Alarm system kit.  |

## PRE-ORDER FORM FOR SL-4

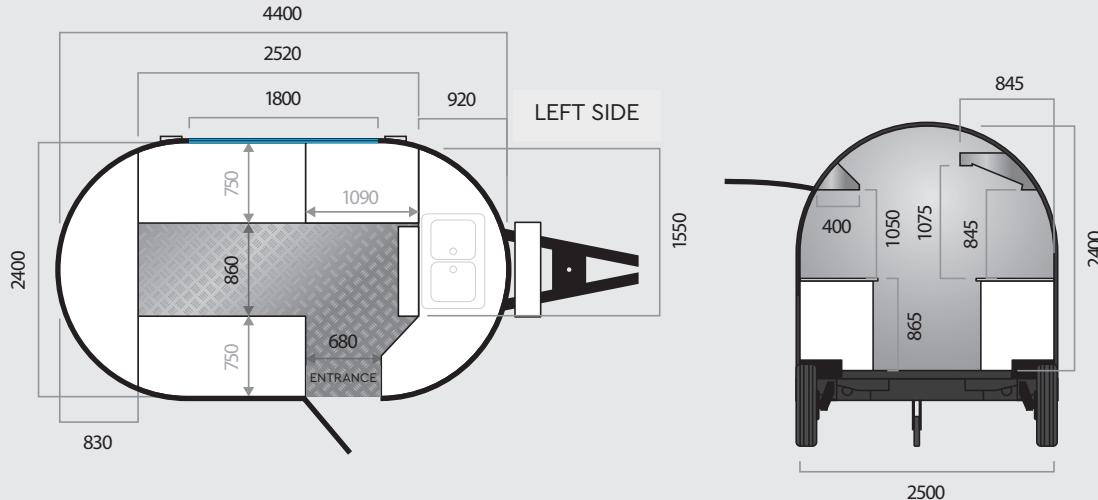

<b>3</b>	Backlit snap-frame for menu in bottom cutout of shop-type window.	<b>31</b>	Thermal air curtain above window or door frame.
<b>4</b>	Chalkboard in bottom cutout of shop-type window.	<b>32</b>	Underfloor electric heating system in trailer's main space.
<b>5</b>	Safety UV-passbox.	<b>33</b>	Single sliding glass unit in aluminum casement.
<b>9</b>	Undercounter refrigerator FreezENK16 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit	<b>35</b>	Dual kitchen sink with mixer tap for cold and hot water.
<b>10</b>	Undercounter freezer FreezENK16 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit.	<b>36</b>	Connector for external water source and drainage.
<b>11</b>	Above-zero chiller room SL-19 (+2...+6 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit.	<b>37</b>	Water tanks for clean water (40 liters) and waste water (40 liters).
<b>12</b>	Low-temperature freezing room SL-19 (-10...-18 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit.	<b>39</b>	Wall-mounted skirted shelves around the entire trailer's circumference (where feasible) above desktops. Depth – 400 mm.
<b>13</b>	Undercounter refrigerator FreezSL-19 (+4...+6 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit.	<b>40</b>	Second row of skirted shelves. Depth – 200 mm.
<b>14</b>	Undercounter freezer FreezSL-19 (-4...-16, -18 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit.	<b>43</b>	Tabletops made of stainless steel around entire trailer's circumference.
<b>15</b>	Undercounter refrigerator SL15 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit.	<b>44</b>	Garbage hole in tabletop.
<b>16</b>	Undercounter freezer SL15 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit.	<b>45</b>	Clothes hanger installed into hemisphere.
<b>17</b>	Installation of customer-provided chilling or freezing equipment.	<b>46</b>	Chemical toilet in trailer's hemisphere.
<b>18</b>	Welded wall-mounted stainless steel ventilation exhaust hood. <b>Exhaust motor not included.</b> Hood width - 1000 mm.	<b>48</b>	Extra power outlets (18 * 220V and 2 * 380V).
<b>21</b>	Increased-overhang (1200 mm) welded wall-mounted stainless steel ventilation exhaust hood. <b>Exhaust motor not included.</b>	<b>49</b>	External waterproof 220V power outlet on trailer's body.
<b>24</b>	Non-adjustable exhaust hood motor. Performance – 1600 m <sup>3</sup> /hour.	<b>52</b>	LED strip around trailer body.
<b>25</b>	Adjustable low-noise exhaust hood motor (made in Sweden). Performance – 1033 m <sup>3</sup> /hour.	<b>53</b>	Retractable rooftop frame for lightbox.
<b>26</b>	Adjustable high-temperature (400°C) exhaust hood motor. Performance – 2600 m <sup>3</sup> /hour.	<b>54</b>	Waterproof amplified Bluetooth stereo loudspeakers.
<b>27</b>	Improved on-roof exhaust system.	<b>55</b>	CCTV system, including video-recorder and 1Tb hard-disk. 2 cameras.
<b>28</b>	Inflow or exhaust ceiling-mounted ventilation box with motor installed in backstore. 3 or more adjustable zones of air inflow/exhaust.	<b>56</b>	CCTV system. 4 cameras.
<b>29</b>	Wall-mounted air conditioning set. Effective area up to 30 m <sup>2</sup> .	<b>57</b>	Internet connection kit.
<b>30</b>	Wall-mounted air conditioning set. Effective area up to 60 m <sup>2</sup> .	<b>58</b>	Alarm system kit.
		<b>59</b>	Integrated gasoline power station (from 3 kW to 10 kW)
		<b>60</b>	Door for hemisphere backstore
		<b>61</b>	Monoaxial pneumatic suspension system. Variable road clearance 0...350 mm.

## PRE-ORDER FORM FOR SL-5

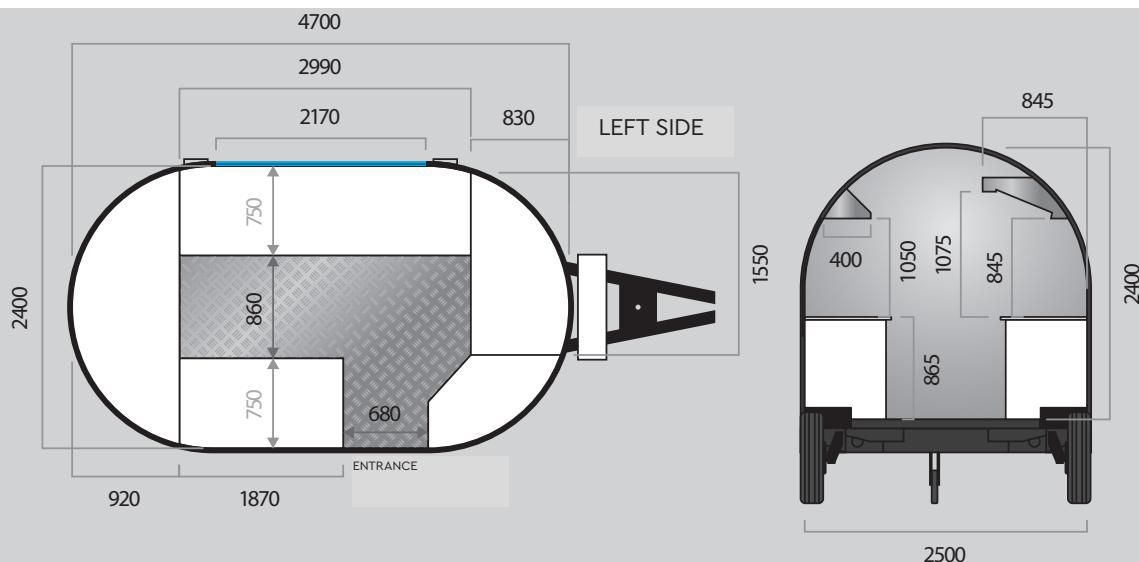

- |           |   |           |   |
|-----------|---|-----------|---|
| <b>3</b>  | Backlit snap-frame for menu in bottom cutout of shop-type window.   | <b>33</b> | Single sliding glass unit in aluminum casement.   |
| <b>4</b>  | Chalkboard in bottom cutout of shop-type window.  | <b>35</b> | Dual kitchen sink with mixer tap for cold and hot water.  |
| <b>5</b>  | Safety UV-passbox.  | <b>36</b> | Connector for external water source and drainage.   |
| <b>9</b>  | Undercounter refrigerator FreezENK16 (+4...+6°C) with external DANFOSS (Denmark) refrigeration unit   | <b>37</b> | Water tanks for clean water (40 liters) and waste water (40 liters).  |
| <b>10</b> | Undercounter freezer FreezENK16 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit.  | <b>39</b> | Wall-mounted skirted shelves around the entire trailer's circumference (where feasible) above desktops. Depth – 400 mm. |
| <b>11</b> | Above-zero chiller room SL-19 (+2...+6 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit.  | <b>40</b> | Second row of skirted shelves. Depth – 200 mm.  |
| <b>12</b> | Low-temperature freezing room SL-19 (-10...-18 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit.                                      | <b>43</b> | Tabletops made of stainless steel around entire trailer's circumference.  |
| <b>13</b> | Undercounter refrigerator FreezSL-19 (+4...+6 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit.                                       | <b>44</b> | Garbage hole in tabletop.   |
| <b>14</b> | Undercounter freezer FreezSL-19 (-4...-16, -18 °C) in hemisphere with external DANFOSS (Denmark) refrigeration unit.                                      | <b>45</b> | Clothes hanger installed into hemisphere.   |
| <b>15</b> | Undercounter refrigerator SL15 (+4...+6 °C) with external DANFOSS (Denmark) refrigeration unit.   | <b>46</b> | Chemical toilet in trailer's hemisphere.  |
| <b>16</b> | Undercounter freezer SL15 (-4...-16, -18 °C) with external DANFOSS (Denmark) refrigeration unit.  | <b>47</b> | Extra openable window on door side.   |
| <b>17</b> | Installation of customer-provided chilling or freezing equipment.   | <b>48</b> | Extra power outlets (18 * 220V and 2 * 380V).   |
| <b>18</b> | Welded wall-mounted stainless steel ventilation exhaust hood.<br><b>Exhaust motor not included.</b><br>Hood width - 1000 mm.                              | <b>49</b> | External waterproof 220V power outlet on trailer's body.  |
| <b>19</b> | Hood width - 1315 mm.   | <b>52</b> | LED strip around trailer body.  |
| <b>21</b> | Increased-overhang (1200 mm) welded wall-mounted stainless steel ventilation exhaust hood.<br><b>Exhaust motor not included.</b><br>Hood width - 1000 mm. | <b>53</b> | Retractable rooftop frame for lightbox.   |
| <b>22</b> | Hood width - 1315 mm.   | <b>54</b> | Waterproof amplified Bluetooth stereo loudspeakers.   |
| <b>24</b> | Non-adjustable exhaust hood motor. Performance – 1600 m <sup>3</sup> /hour.   | <b>55</b> | CCTV system, including video-recorder and 1Tb hard-disk. 2 cameras.   |
| <b>25</b> | Adjustable low-noise exhaust hood motor (made in Sweden).<br>Performance – 1033 m <sup>3</sup> /hour.   | <b>56</b> | CCTV system. 4 cameras.   |
| <b>26</b> | Adjustable high-temperature (400°C) exhaust hood motor.<br>Performance – 2600 m <sup>3</sup> /hour.   | <b>57</b> | Internet connection kit.  |
| <b>27</b> | Improved on-roof exhaust system.  | <b>58</b> | Alarm system kit.   |
| <b>29</b> | Wall-mounted air conditioning set.<br>Effective area up to 30 m <sup>2</sup> .  | <b>59</b> | Integrated gasoline power station (from 3 kW to 10 kW).   |
| <b>30</b> | Wall-mounted air conditioning set. Effective area up to 60 m <sup>2</sup> .   | <b>60</b> | Door for hemisphere backstore.  |
| <b>31</b> | Thermal air curtain above window or door frame.   | <b>61</b> | Monoaxial pneumatic suspension system. Variable road clearance 0...350 mm.  |
| <b>32</b> | Underfloor electric heating system in trailer's main space.   |           |   |

# StreetMini model

## TECHNICAL SPECIFICATIONS:

Length ..... 2930 mm

Width ..... 2500 mm

Height ..... 2300 mm

Area ..... 7,3 m<sup>2</sup>

## Starting at 11 500





**MOBITRUCK**  
by EdaNaKolesah.com

# VENDINGTRUCK

## SECURITY FOR YOUR INVESTMENTS

- EASY TO CHANGE LOCATION AND SAVE INVESTED MONEY
- INCREASED VALUE OF ASSET AFTER PANDEMIC: OPPORTUNITIES TO PLACE VENDINGTRUCK AT DIFFERENT EVENTS



## PRODUCT RANGE


- ESSENTIAL FOODS (BREAD, MILK ETC.)
- FACIAL MASKS, SANITIZERS, DISINFECTANTS
- CHOCOLATE, CONFECTIONERY, BOTTLED SOFT DRINKS ETC.
- COFFEE, CACAO, VARIETY OF TEA (PACKED AND BOTTLED)
- MULTIPLE OPTIONS FOR PRODUCT RANGE

## INDEPENDENCE

- INTEGRATED 14 KW POWER STATION (FOR USAGE WITHOUT EXTERNAL POWER GRID)
- LARGE CHILLERS AND FREEZERS FOR STORAGE OF STOCKS
- EXTRA POWER BATTERY FOR LIGHTS AND CHILLERS/FREEZERS
- EASY SERVICING (UP TO 6 TRAILERS OR UP TO 36 VENDING MACHINES MAINTAINED BY 1 PERSON AT THE SAME TIME)

## STOP CORONA

- AUTOMATIC DISPENSER FOR HAND SANITIZER
- NO INTERACTION BETWEEN STAFF AND CUSTOMERS
- 2-SIDED TRAILER, 3 VENDING MACHINES ON EACH SIDE - SMALLER QUEUE
- OUTDOOR INSTALATION PROVIDES EASIER SOCIAL DISTANCING AND DECREASES RISK OF AIRBORNE DISTRIBUTION OF VIRUSES

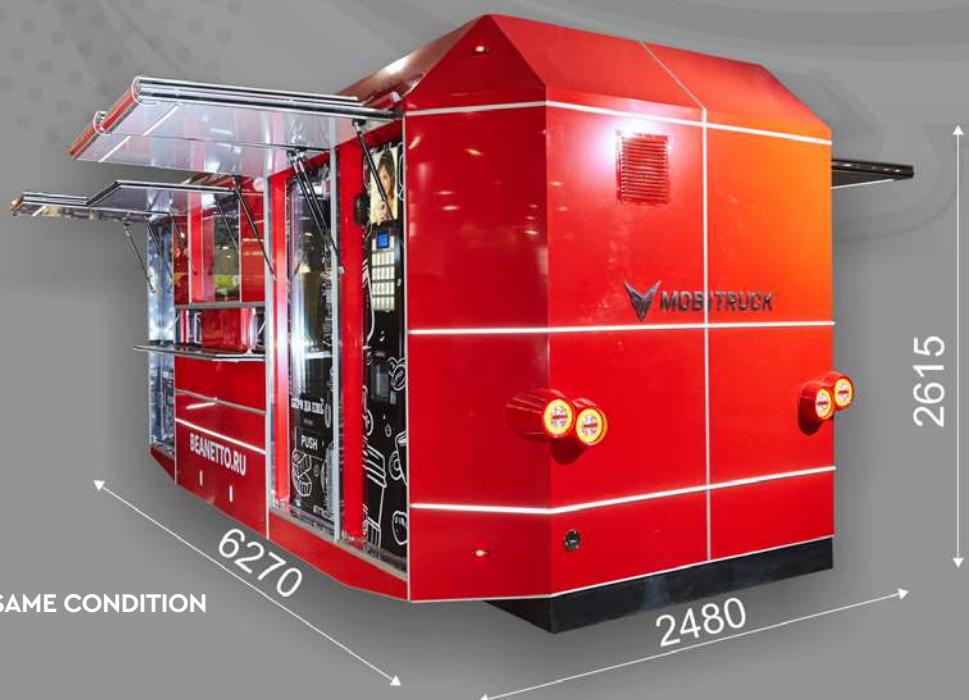

## MOBILITY

- EASY SET UP AT ANY LOCATION
- THE LOCATION REMAINS IN THE SAME CONDITION AFTER REMOVING THE TRAILER



**MOBITRUCK**  
by EdaNaKolesah.com

# MODEL SL-4 «OPTIMUM»

**Sk**  
Resident

**CREATING  
MOBILE CONCEPTS FOR  
YOUR BUSINESS**

Nº	EQUIPMENT	Q-TY
1	FOOD TRAILER «SL-4»	1
1	Single sliding glass unit in aluminum casement.	1
1	Welded wall-mounted stainless steel ventilation exhaust hood. Hood width – 1000 mm.	1
1	Non-adjustable exhaust hood motor. Performance – 1600 m <sup>3</sup> /hour.	1
1	Dual kitchen sink with mixer tap for cold and hot water.	1
1	Water tanks for clean water (40 liters) and waste water (40 liters).	1
1	Wall-mounted skirted shelves around the entire trailer's circumference.	1
1	Extra power outlets (18 * 220V and 2 * 380V).	1
1	LED strip around trailer body.	2
1	Tabletops made of stainless steel around entire trailer's circumference.	1
1	Wardrobe shelf for SL models.	1

**PRICE: 22 300**




**EdaNaKolesah.com**

CONTACTS: 8 800 777 42 39, +7 925 754 88 06  
[info@EdaNaKolesah.com](mailto:info@EdaNaKolesah.com)  
 Pokrovskoe village, Istra district, Moscow region, Russia

Business hours:  
from 9:00 to 20:00



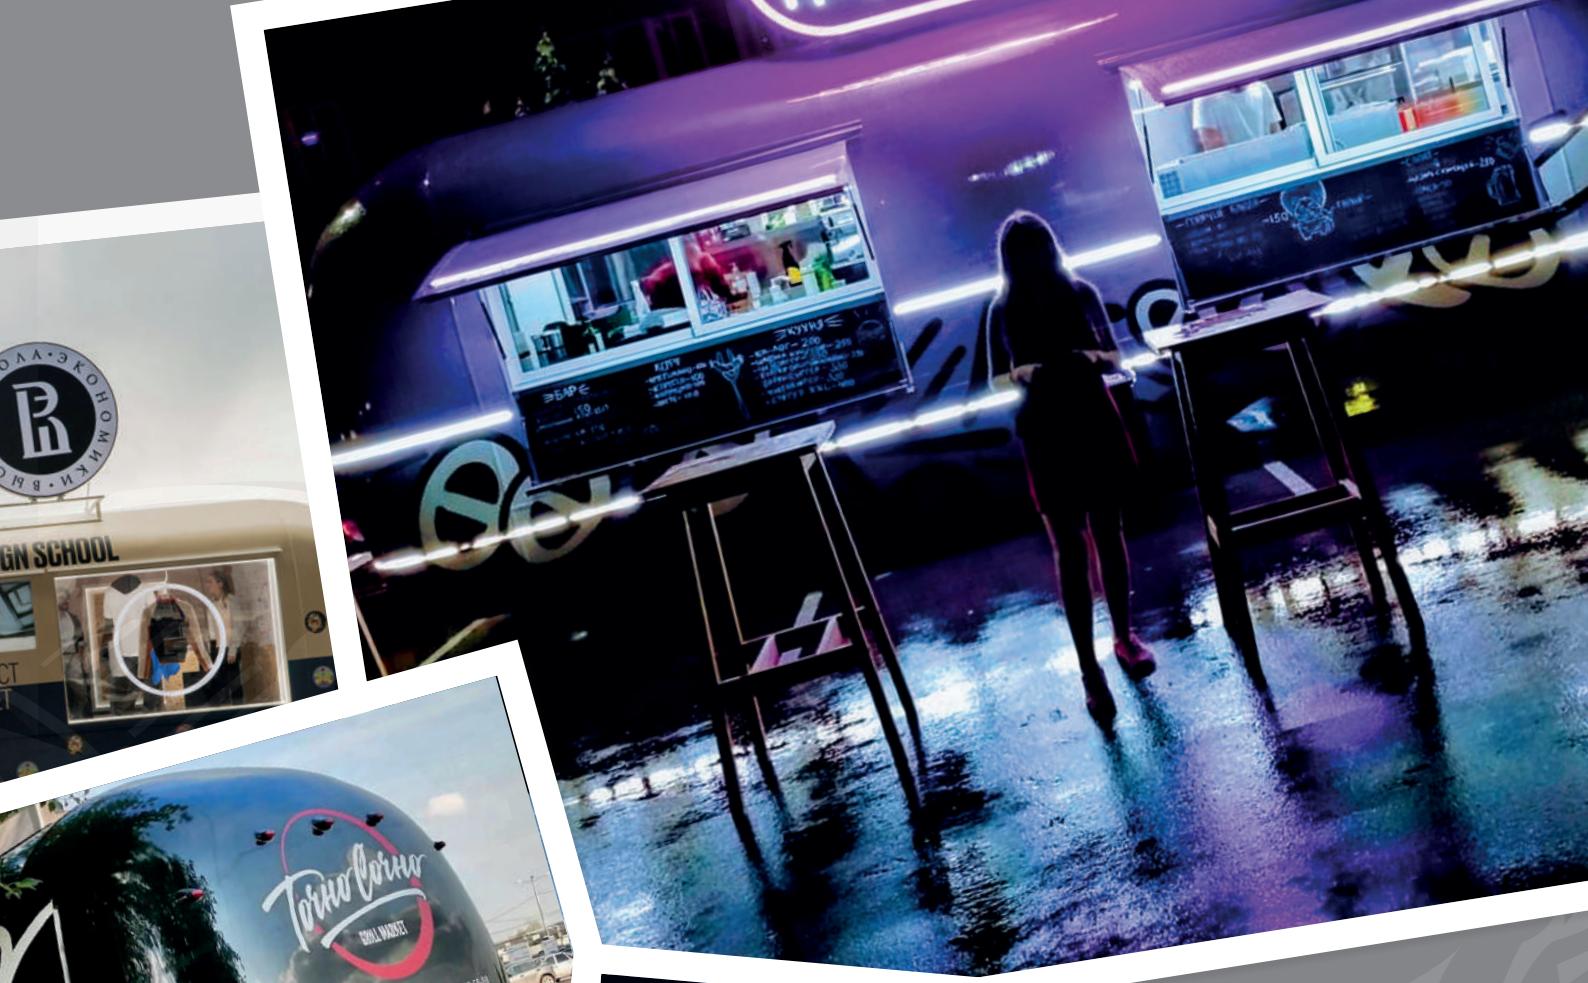











**MOBITRUCK**  
by *EdaNakolesah com*

**ADDRESS:**

27 Tsentralnaya str., Pokrovskoe village, Istra township, Moscow region, Russia

+7 (916) 557 47 09

+7 (925) 754 88 06

+7 (985) 710 33 98

[info@mobitruck.ru](mailto:info@mobitruck.ru)

[info@edanakolesah.com](mailto:info@edanakolesah.com)

[www.mobitruck.ru](http://www.mobitruck.ru)

[www.EdaNakolesah.com](http://www.EdaNakolesah.com)

