Belt Weigh Feeder @ Enweigh Works













Belt Weigh Feeder @ JK Lakshmi-UCWL – Udaipur
Cap:- 1300 TPH / Belt Width – 2000 mm





Material:- Limestone
Cap:- 1300 TPH / Belt Width – 2000 mm

Belt Weigh Feeder @ Lloyds Metals, Ghugus




Belt Weigh Feeder @ SMC Power - Jharsuguda





Loss In Weight System @ Vedanta Ltd. - Goa



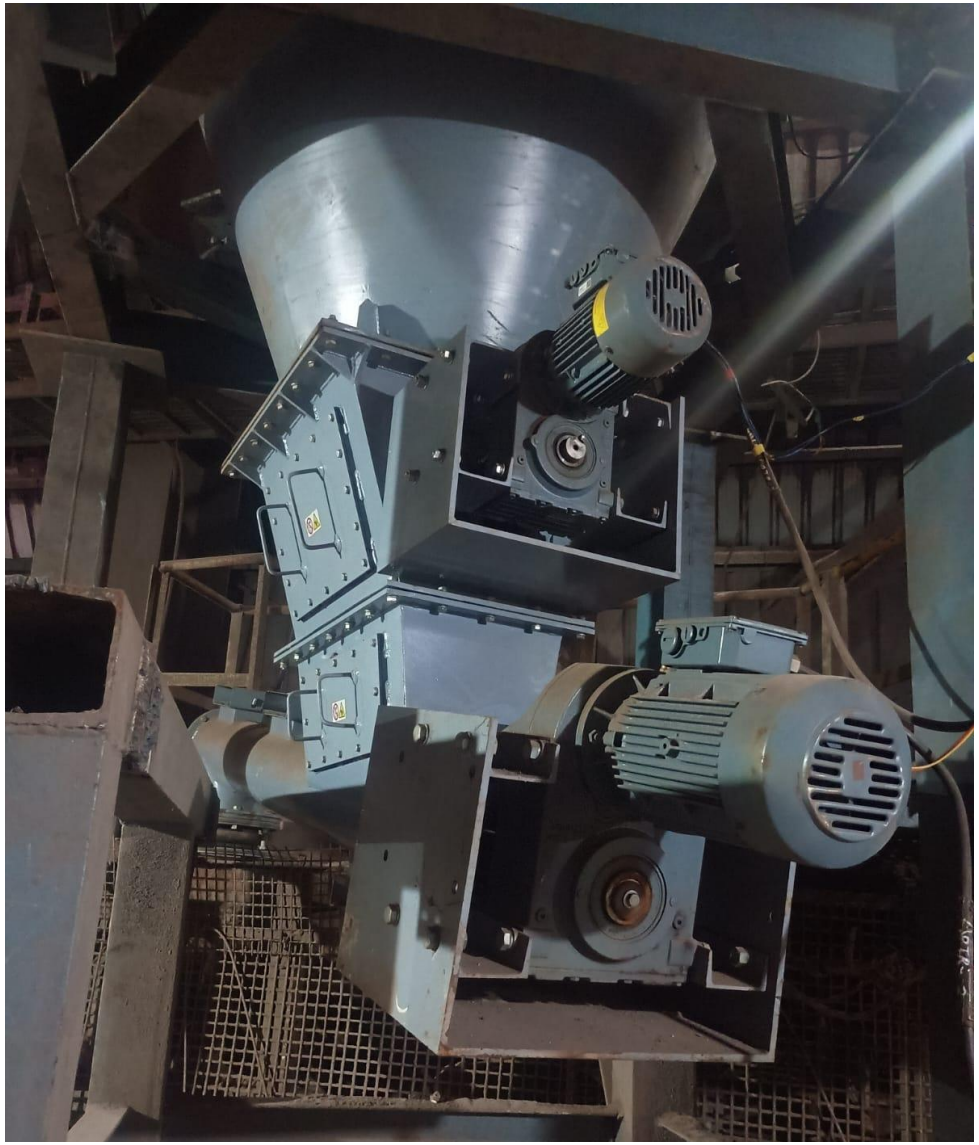

Belt Weigh Feeder @ ICL Malkapur



Belt Weigh Feeder @ ICL Malkapur




Belt Weigh Feeder @ Lloyds Metals, Ghugus



Belt Weigher @ Lloyds Metals – Konsari, Gadchiroli




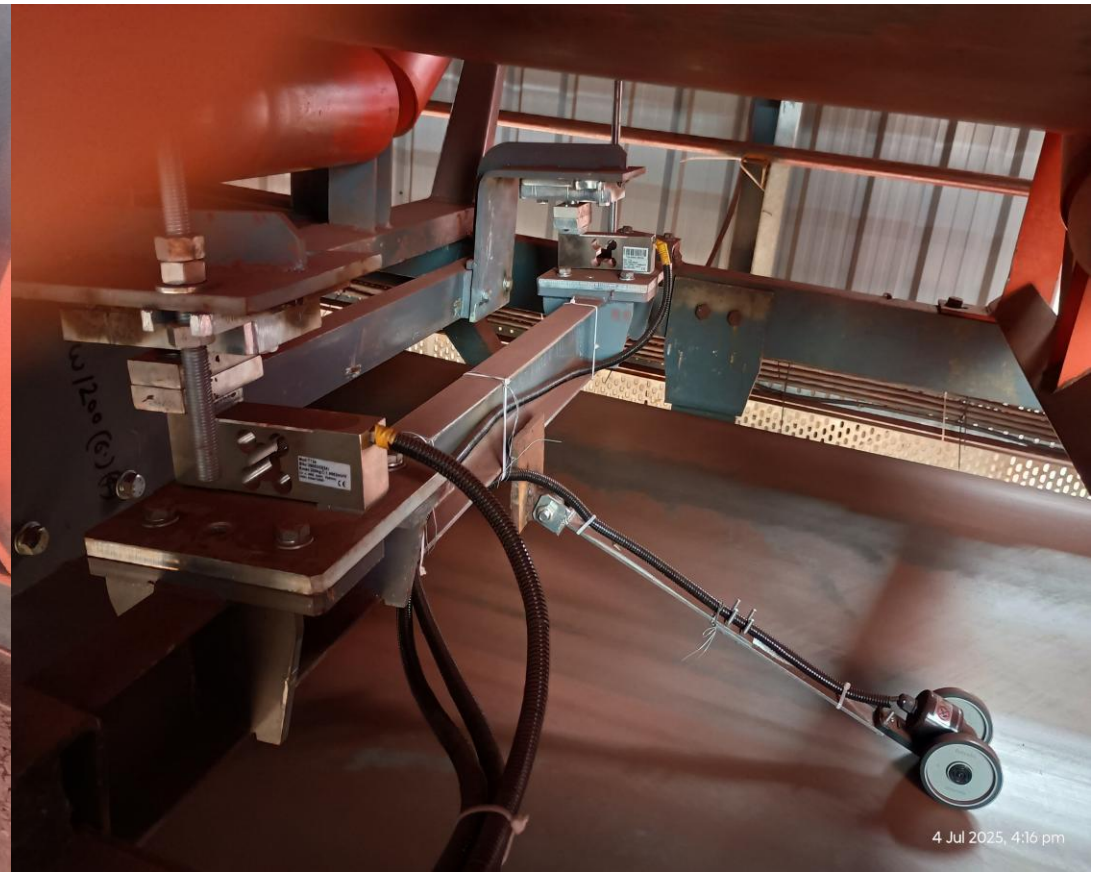

Belt Weigher @ Lloyds Metals - Ghugus



Belt Weigher @ Lloyds Metals, Ghugus

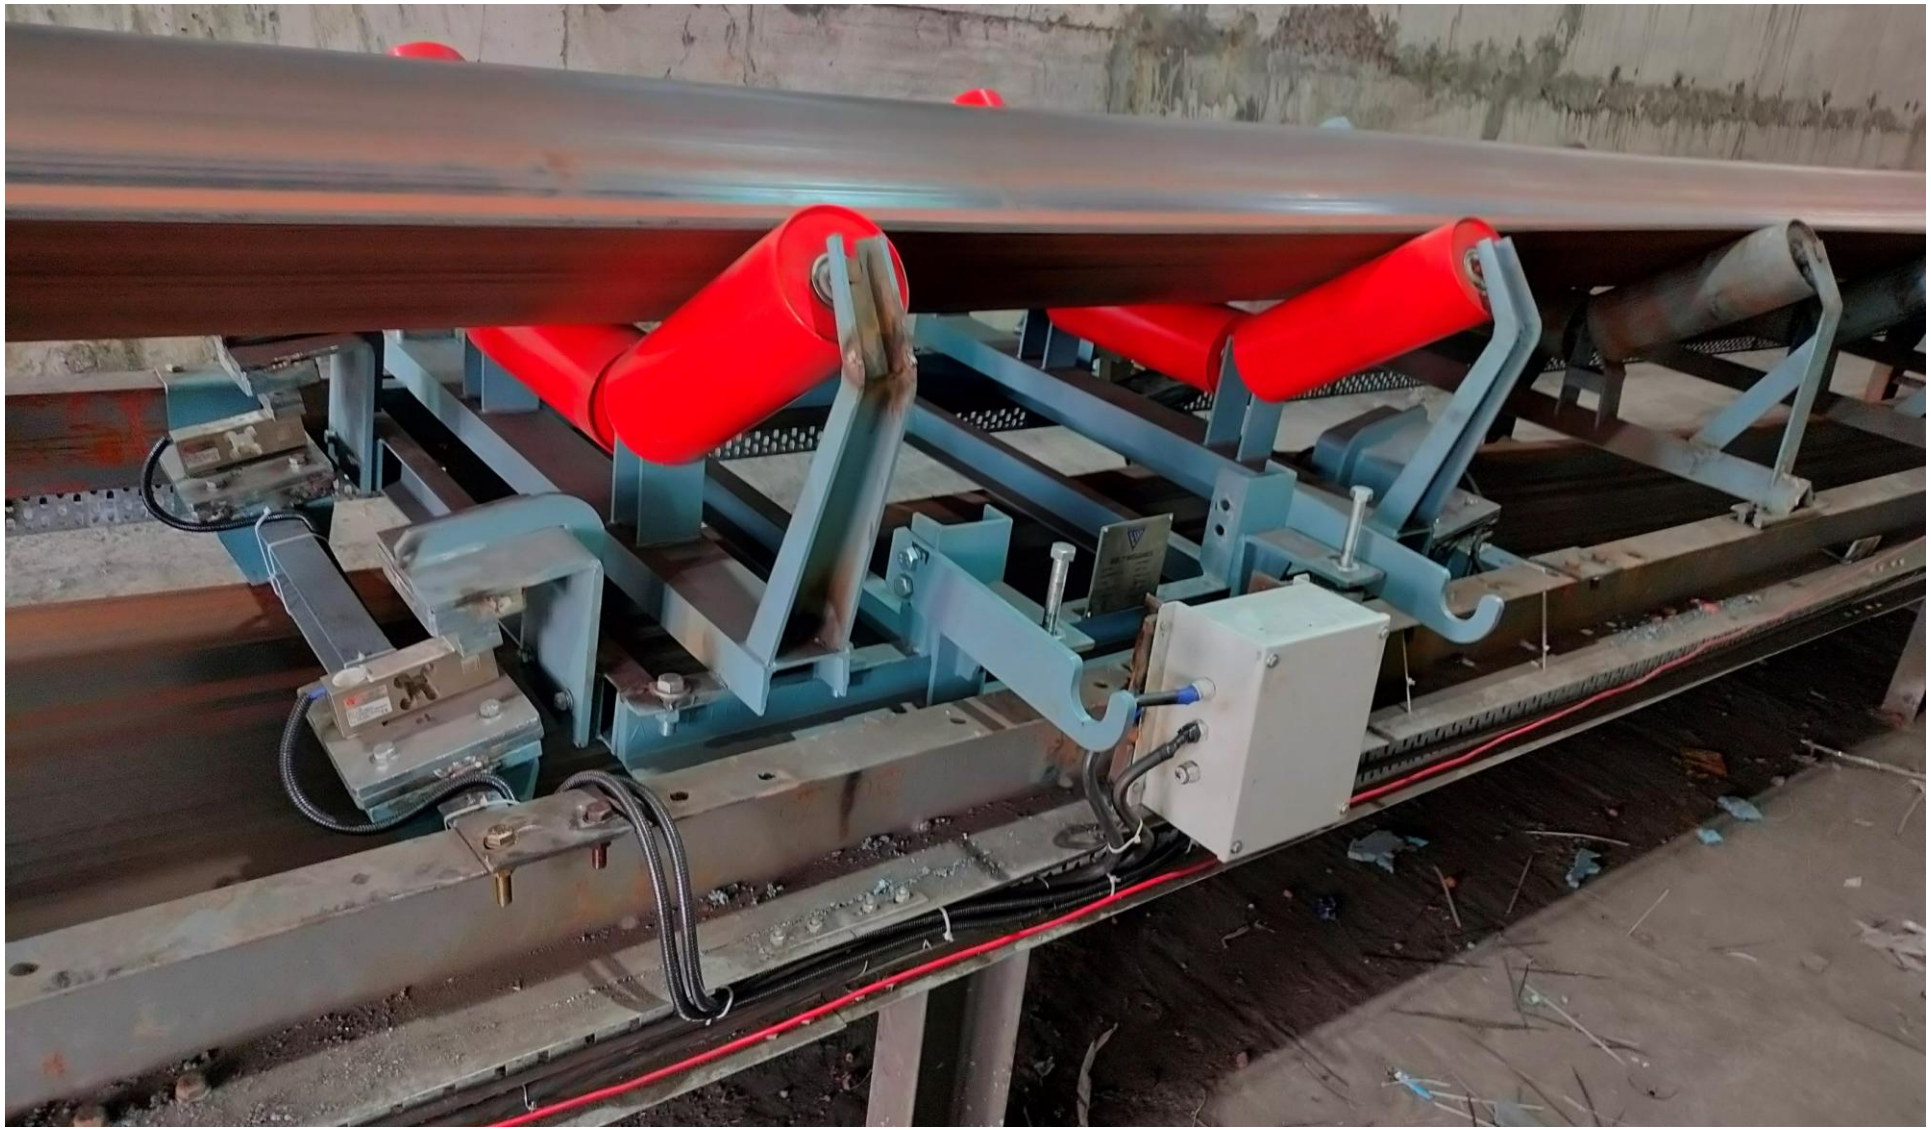

Belt Weigh Feeder @ Gravity Iron - Raipur



Belt Weigh Feeder @ Gravity Iron - Raipur



Belt Weigh Feeder @ Gravity Iron - Raipur



Belt Weigh Feeder @ Singhal Steel - Raigarh




Belt Weigh Feeder @ Singhal Steel - Raigarh



Belt Weigh Feeder @ MSP Steel & Power Ltd. - Raigarh



Belt Weigh Feeder @ Enweigh Works

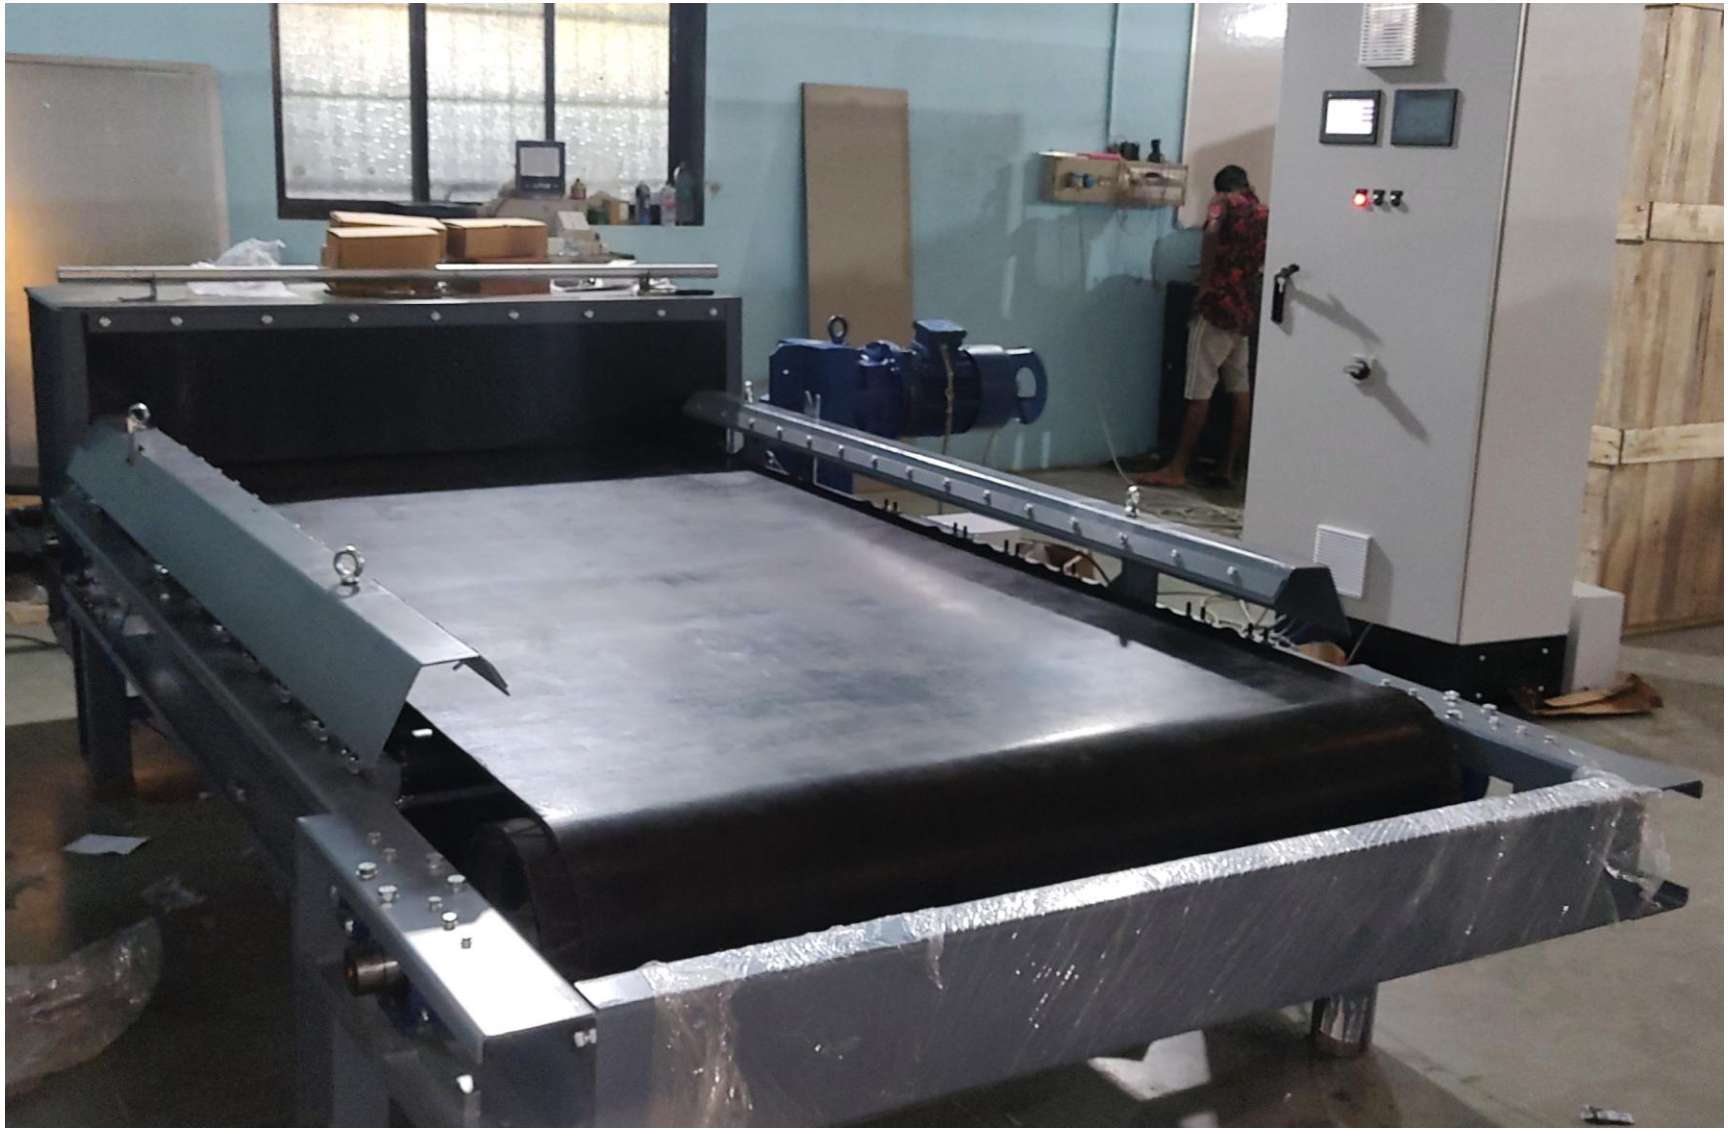

Belt Weigh Feeder @ Enweigh Works



ENWEIGH INDIA

EUC-2 CONTROLLER FOR WEIGH FEEDER

Features of EUC-2 Controller

Standard Features

- Touch Screen HMI
- High-speed load cell Interface
- Fully Automatic operations
- Fault Log, Data & Event Logging
- USB/Ethernet for data back-up
- Analog inputs (4-20mA/0-10V)
- 4 A/I & 2 A/O (Inbuilt)
- 14 D/I & 10 D/O (Inbuilt)
- Additional AIO / DIO modules available
- Load-cell & Speed sensor
- Hardwire connectivity
- Powerful User interface through HMI

Additional / Optional features

- VPN Connectivity (Remote access)
- Bus interface




EUC-2 CONTROLLER WITH TOUCH SCREEN HMI





IMAGE : 2 WF IN 1 PANEL




EUC-2 CONTROLLER SCREENS

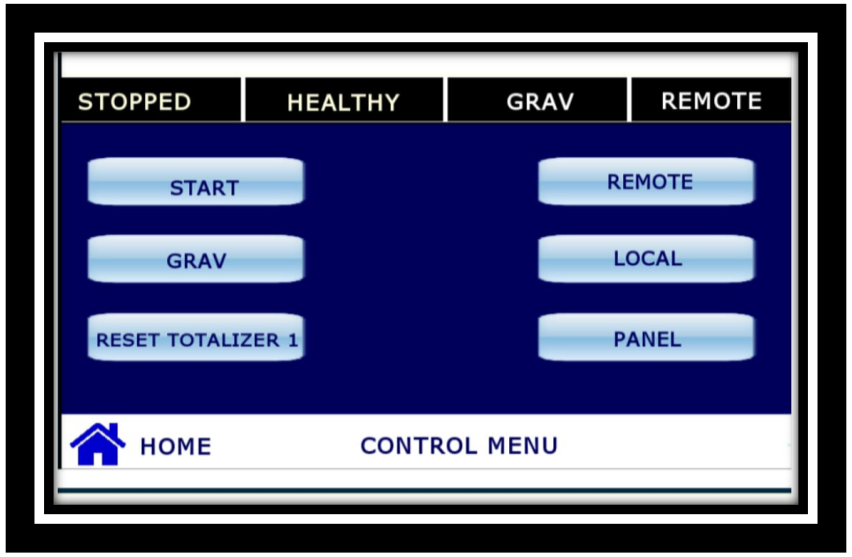

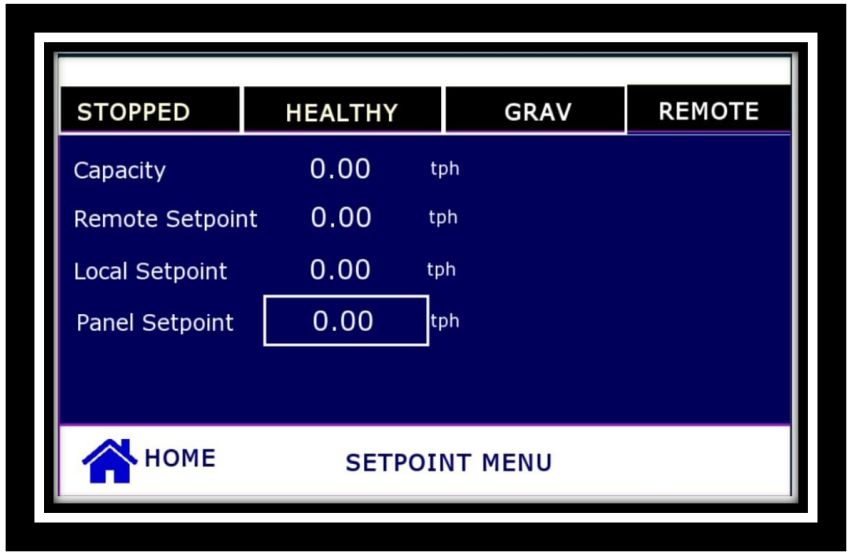

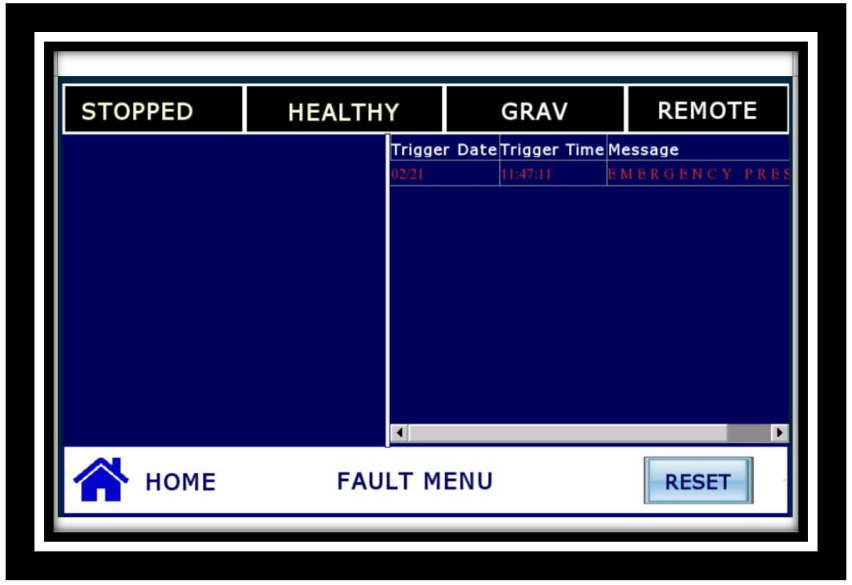

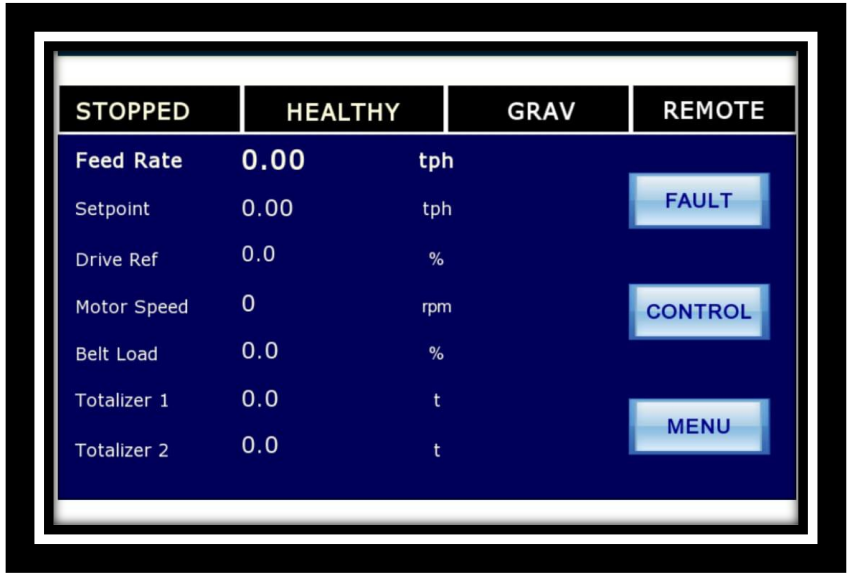

SPECIAL FEATURES - EUC-2 CONTROLLER

Sr. No.	Special Features	Advantages
1	The PLC based electronics is of modular construction with software engineered specially for continuous weighing and proportioning application.	• The system allows easy expansion of facilities and provides a very high resolution and speed which are essential for accurate measurement of variables, especially for continuous weighing applications.
2	Encoder / Speed sensor bypass in EUC-2 Controller	• In case of Encoder failure, the Weigh Feeder can be operated through VFD speed feedback thereby avoiding any stoppage.
3	Remote Connectivity with EUC-2 Controller	• Access of EUC-2 Controller through network (Optional)
4	Touch Screen HMI	• 7” Coloured Touch Screen HMI mounted on panel door for easy access and user friendly interface.
5	AIO / DIO Modules	• 4 A/I & 2 A/O (Inbuilt) & 14 D/I & 10 D/O (Inbuilt). Additional AIO / DIO modules available as per requirement.

ENWEIGH

sales@enweigh.in