

IoT Based Multipurpose Agribot

Siddharth Gupta
Electronics and
Telecommunication
Vishwakarma Institute of
Technology, Pune
Pune, India
siddharth.gupta18@vit.edu

Pradnya Ghadge
Electronics and
Telecommunication
Vishwakarma Institute of
Technology, Pune
Pune, India
pradnya.ghadge17@vit.edu

Shraddha Katkar
Electronics and
Telecommunication
Vishwakarma Institute of
Technology, Pune
Pune, India
shraddha.katkar17@vit.edu

Rutuja Ingale
Electronics and
Telecommunication
Vishwakarma Institute of
Technology, Pune
Pune, India
rutuja.ingale18@vit.edu

Rushikesh Devsani
Electronics and
Telecommunication
Vishwakarma Institute of
Technology, Pune
Pune, India
rushikesh.devsani18@vit.edu

Dr. Ashutosh Marathe
Electronics and
Telecommunication
Vishwakarma Institute of
Technology, Pune
Pune, India
ashutosh.marathe@vit.edu

Abstract—The objective of this paper is to design, development and the fabrication of the Agribot which is a multipurpose bot can perform all the farming operations including ploughing the soil of the field, sowing seeds in the ploughing area, making the field in plain by using leveler, watering the crops, fertilizing them and monitor the agribot by using camera. The traditional farming methods consume a lot of manual labour. Some of the operations are manual, while others are operated using manually operated machines. Therefore, there are no such robots, which can perform all these operations autonomously.

Keywords— Agribot, ploughing, sowing seeds, leveler, fertilizing.

I. INTRODUCTION

India is a developing country having the second largest arable land in the world. About 60% population of India is depending on agriculture. Because of this only India can survive even during recession period. Therefore, agriculture is a backbone of India. Agriculture contributes in India's national income as well as it helps in generating employment in the country. Only because of the agriculture, India can meet the food demand of ever-increasing population. Now-a-days, modern ways of yielding Argo products have changed the old ways of agriculture in the world and the increasing population has met the need to feeding all the people in the world.

The idea of applying robotics technology in agriculture is very new. In agriculture, the opportunities for robot-enhanced productivity are immense - and the robots are appearing on farms in various guises and in increasing numbers. At outcome the robots performing agricultural operations autonomously such as ploughing, seed sowing, leveling, watering and fertilizing spraying. Watching the farms day & night for an effective report, allowing farmers to reduce the environmental impact, increase precision and efficiency, and manage individual plants in novel ways.

The below charts shows SHARE OF THE LABOR FORCE EMPLOYED IN AGRICULTURE ACROSS WORLD

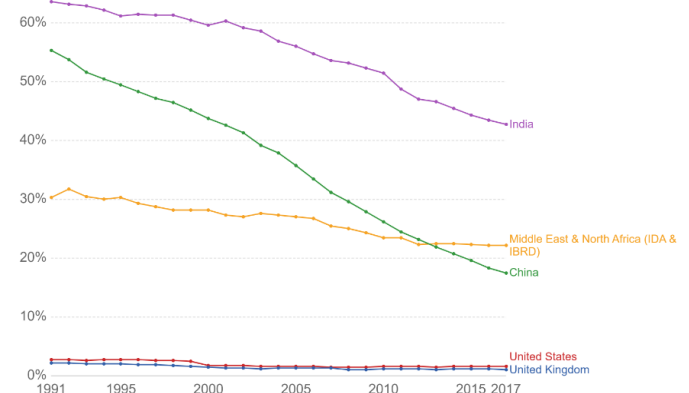


Fig 1: Share of the Labor Force Employed In Agriculture across World

<https://ourworldindata.org/employment-in-agriculture>

The below charts shows AGRICULTURE VALUE ADDED PER WORKER

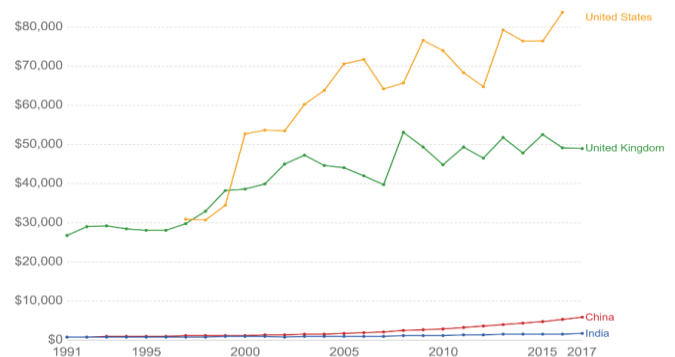


Fig 2: Agriculture Value Added Per Worker

<https://ourworldindata.org/employment-in-agriculture>

The below charts shows VALUE ADDED IN THE AGRICULTURAL SECTOR (AS % OF GDP) VS GDP PER CAPITA, 2015



Fig 3: Value added in the agricultural sector (as % of GDP) vs GDP per capita

<https://ourworldindata.org/employment-in-agriculture>

The proposed paper lies in an agriculture-oriented domain suited well traditional farming methods. This paper aim to create an agribot that can perform various farming operations such as ploughing, sowing, watering and fertilizing the crops. The traditional farming methods consume a lot of manual labour. Some of the operations are manual involving no machine interference. While others are operated, using manually operated machines involving both, manual and machine interference. Therefore, agribot, which can perform all these operations autonomously and minimize or reduce the manual labor. On the other hand, most of the products existing in this domain provide the service of only specific operations, so the consumer needs to purchase more than one machine. This system will consist of integrated output i.e. all the operations can be performed using a single machine thus providing an ease while working. IoT has been used extensively because of its benefits. The major benefit being ease of use from any location in the world. The bot is interfaced with DC as well as Servomotors for performing the farming operations.

II. PROPOSED SYSTEM

All the field operation such as ploughing, sowing, rolling, watering and fertilizing will be conducted autonomously using an android application. The bot can be controlled in two ways, manual and autonomous mode. All the operations will be performed simultaneously in the autonomous mode, while the system can control any operation using the manual mode.

A. Ploughing:

The traditional method for ploughing involves strenuous labour wherein the farmer along with animals or tractor (machine) ploughs the entire field manually. The drill plough along with a servo motor is present on the bot. The microcontroller commands the servomotor, which is attached to the drill plough and can be operated according to the user's need. To operate the process of ploughing, the servomotor is given commands in which rotates up to 180 degrees and the

drill plough enters the ground. When the drill enters the ground, the bot is moved according to the path using sensors and ploughing is being performed. In the manual mode, the agribot can perform ploughing only on the required places. While in the autonomous mode, the bot follows the path already specified by the user.

B. Sowing:

The next operation involves sowing the seeds in the field. Traditionally, sowing is done manually that is the farmer or his workers sow seeds by scattering them on the soil. In this project, a servomotor along with a tank containing seeds is placed on the agribot with appropriate openings. For sowing, the shaft is rotated up to a desired angle and as the robot moves, the seed falls down in the soil from the openings present on robot. In the manual mode, the frequency of the seeds falling on the ground can be controlled by rotating the shaft of the motor accordingly.

C. Leveling:

Leveling the field is the basis of the third object. When the seed is sowing manually, it is inserted into the soil. This operation consumes manual labour and time. While sowing the field, the seeds were not dug into the soil. Therefore, this operation named leveling, which levels the land and the seeds are sown properly. The roller is connected to the servo motor and placed on the bot. The initial position of servomotor is such that the roller is above the ground. The shaft is rotated such that the roller is exposed to the field and when the agribot moves, the field is being levelled. It can save the time and energy of the farmer by performing the operation autonomously. This operation goes hand in hand with sowing. In manual mode, the freedom to control this operation separately.

D. Watering:

Watering the field is done using drip irrigation. Drip irrigation uses the pipelines (with appropriate openings) which are spread across the field and water is fed to the crops according to the requirement. The water is fed in the pipelines by a water pump inside the water tank, which is present on the agribot. In manual mode, the freedom to control this operation separately.

E. Fertilizing:

Fertilizing the field is the next operation in the line, which is necessary to ensure proper growth of the crops. According to the traditional farming methods, manual labour is used to fertilize the field. This process again, consumes time and energy of the farmer. A tank (with appropriate openings) filled up with fertilizers along with the servo motor is placed on the agribot. Initially, the opening is closed as the shaft of the motor is present on the opening and no fertilizing is done. For fertilizing, the shaft is rotated up to a desired angle to let flow the fertilizer from the openings present on the tanks. In the manual mode, frequency of the fertilizers can be controlled.

III. FLOWCHART OF AGRIBOT

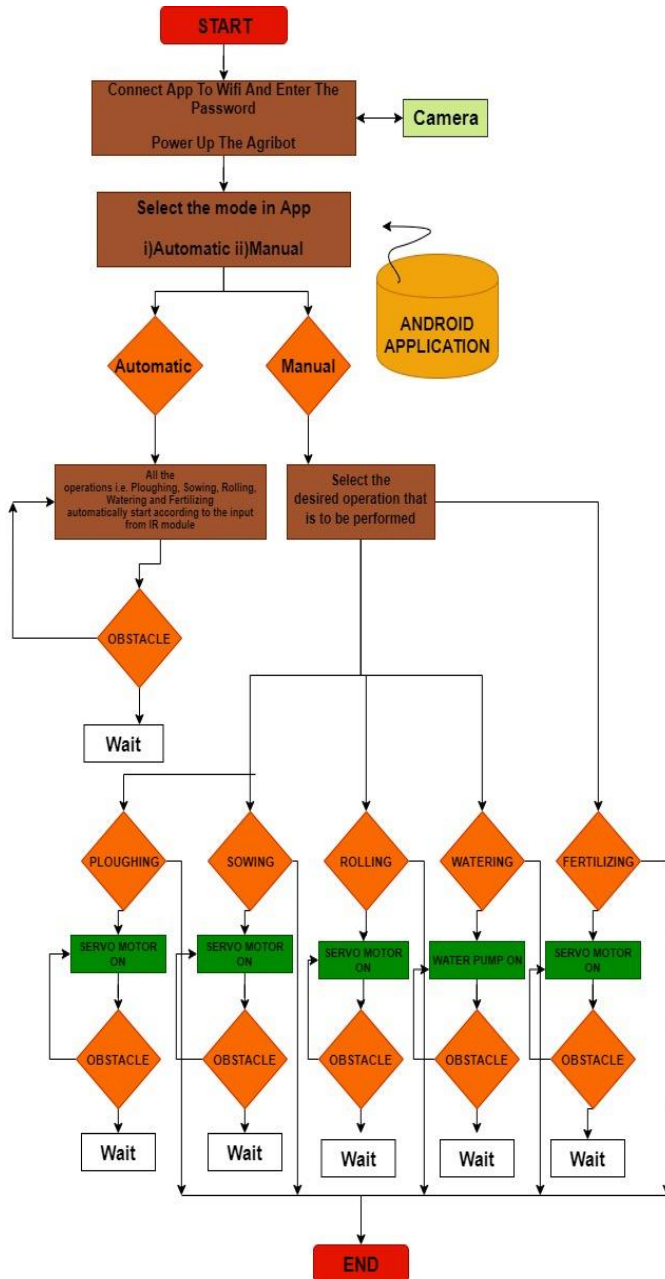


Fig 4: Flowchart of Agribot

IV. HARDWARE COMPONENTS

This idea for the integration of two modules into a single unit comprises of following hardware components:

- AGRUINO MEGA (2560)
- NODEMCU(ESP8266)
- SERVOMOTOR
- DC MOTOR
- ESP32 CAMERA MODULE
- ULTRASONIC SENSORS (HC-SR04)

V. WORKING PRINCIPLE

This idea comprises of two unit Agribot Unit and Monitoring System Unit: -

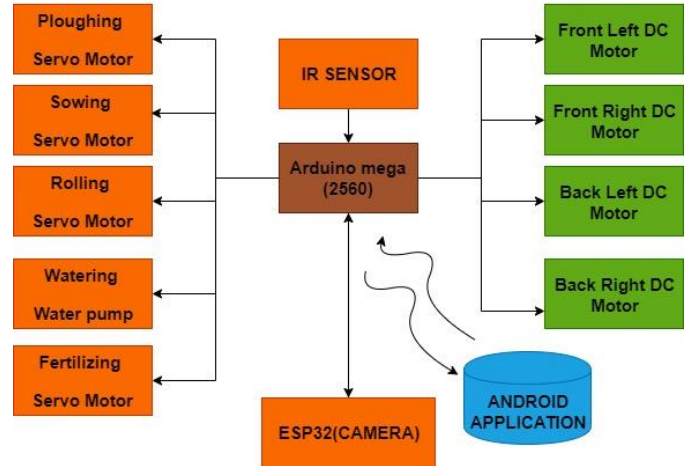


Fig 5: Block Diagram of Agribot

Arduino Mega (2560) controls the four wheels of the agribot according to the input from the IR sensor. The android application takes the command from the user such as selection of the mode (automatic and manual) or which operation to be performed and it is further sent to the Wi-Fi module. The controller in turn gets command from the Wi-Fi module (Esp32866). Arduino Mega is also used to give commands to the respective motors that will carry out the operations including ploughing, sowing, levelling, watering and fertilizing of the crops.

- Agribot get connect to Wi-Fi
- Commands from app on the mobile will sent
- According to it that particular task will get performed

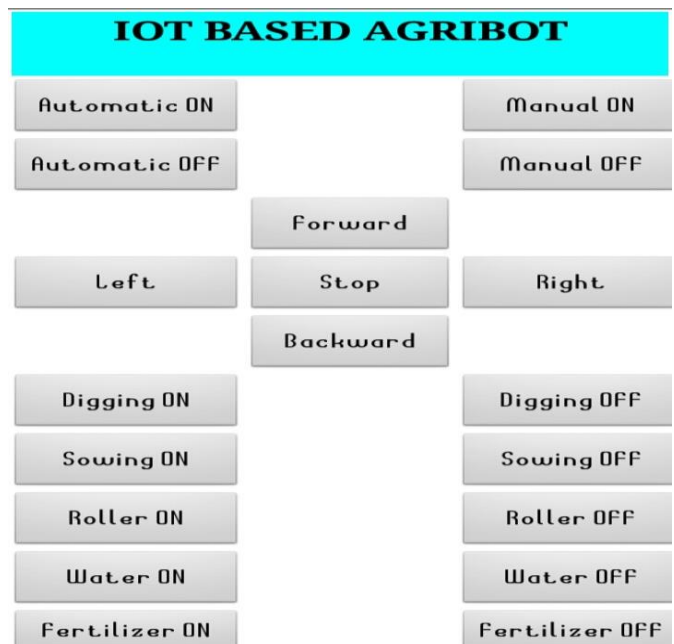


Fig 6: Application to Control Agribot

In Monitoring system when the major fieldwork is done, the farmer has to keep a check on the field for various reasons. This is achieved by the monitoring system. Various parameters such as drip irrigation, fertilizing, maintaining temperature (for green house farming), removal of extra water (during floods) and keeping track of crop growth will be taken care by using monitoring system. Drip irrigation can be done according to the requirements of the crops. According to the frequency of insects, fertilizers can be sprinkled over the crops. The temperature can be maintained according to the crop requirements (for green house farming system). The extra water during floods can be removed and stored in tanks for future use (water harvesting). Proper track of crops will be kept using surveillance system.

VI. ADVANTAGE

- This fully automatic robot which works on open architecture principle and does a lot of work in farms, so it reduces human labour. Due its quick action time will be saved.
- Agribot can able to work in any environmental condition.
- The robots can work continuously without any error.
- Protection against harmful effects of chemicals.

VII. APPLICATION

- It is used for agricultural purposes to do multiple task at a time.
- The system observes different environmental conditions (temperature, soil moisture) & take actions accordingly which humans can't do accurately.
- An autonomous robot works on open architecture principle and does a lot of work in farms so it reduces human labour.
- It can alter to any type of crops in the fields.
- It is cost efficient and highly reliable one.

VIII. FUTURE SCOPE

The solar panel can replace the battery power supply to reducing the recharge cost and get power on the field itself. Then it also includes the weeding and harvesting in this system.

IX. CONCLUSION

In agriculture, the opportunities for robots are becoming the part of the today world. The causes associated with farm equipment can probably be overcome with technology. This equipment may be in the future, but there are important reasons for thinking that it may not be just replacing the human driver with a computer. Crop production may be done better and cheaper. From the above study of IoT technology application and the implementing it on the field with the help, Arduino, sensors and camera combined together make an efficient proposed system. The precision monitoring and collecting data from the surroundings using IoT made a greater improvement in the way of doing farming. The sensor

collects valuable data and camera are used well at the same time using the proper Server as the System. In addition, the proposed system offers a good user interface, easy way for implementation and real time environment in the farming. This paper also optimizes the laboring cost for the farmers and it conserves the valuable time to invest in some other things like so, the agriculture can be made more efficient and in accurate manner with the help of Agribot. Finally, the proposed system will change the mundane ways of doing the farming and led to arose a new era in the future.

X. REFERENCE

- [1] Chengling Liu, Mingjun Wang and Jun Zhou, "Coordinating control for an Agricultural vehicle with Individual wheel speeds and steering angles," in IEEE Control Systems Magazine, 2015, vol. 28, issue 5.
- [2] Ajay Mittal, Sanat Sarangi, Saranya Ramanath, Prakruti V. Bhatt, Rahul Sharma and Srinivasu P. , "IoT-based Precision Monitoring of Horticultural Crops – A Case-study on Cabbage and Capsicum," IEEE Transl, May, 2018.
- [3] Minh Anh Tuan Tran, Trong Nhan Le, Tan Phuong and Viet Nam, "Smart-Config Wi-Fi Technology Using ESP8266 for Low-Cost Wireless Sensor Networks" in International Conference on Advanced Computing and Applications (ACOMP), IEEE, January, 2018.
- [4] Lily Puspita Dewi, Justinus Andjarwirawan and Robin Putra Wardoyo, "Android Application for Monitoring Soil Moisture Using Raspberry Pi" in International Conference on Soft Computin, Intelligent System and Information Technology (ICSIT), Indonesia, IEEE September, 2017.
- [5] Ji-chun Zhao, Jun-feng Zhang, Yu-feng and Jian-xin Guo, "The Study and Application of the IoT Technology in Agriculture" in International Conference on Inventive Research in Computing Applications (ICIRCA), China, February, 2018.
- [6] Amritanshu Srivastava, Shubham Vijay, Alka Negi and Akash Singh, "DTMF Based Intelligent Farming Robotic Vehicle," in International Conference on Embedded Systems (ICES), IEEE, 2014.
- [7] Gulam Amer and S.M.M. Mudassir, M.A. Malik, "Design and operation of Wi-Fi Agribot Integrated system" in International Conference on Industrial Instrumentation and Control (ICIC), IEEE 2015.
- [8] M. priyadarshini and Mrs. L. Sheela, "Command based self guided digging and seed sowing rover" in International Conference on Engineering Trends and Science & Humanities (ICETSH), 2015.
- [9] Akhila Gollakota and M. B. shriniva, "Agribot - a multipurpose agricultural robot," in India conference (INDICON), IEEE, 2011.
- [10] Shivaprasad B. S., Ravishankara M. N. and B. N. Shoba, "Design and implementation of seeding and fertilizing agriculture robot" in International Journal of Application or Innovation in Engineering & Management (IJAIEM), June 2014, Vol. 3, Issue 6.
- [11] Karan singh, K. Agrawal, A. K. Dubey and M. P. Chandra, "Development of the controller based seed cum fertilizer drill" in Internal Conference on Intelligent Systems Design (ISDA), IEEE, 2012.
- [12] Sandeep Konam, "Agricultural Aid for Mango cutting (AAM)" in International Conference on Advances in Computing, Communications and Informatics (ICACCI), India, IEEE, 2014.