


## TESTING

1. Any Open, Short Miswiring & Intermittent are not permitted.
2. Contact Resistance: 5  $\Omega$ .
3. Insulation Resistance: 5M $\Omega$ /300V DC MIN.
4. This product is RoHS compliant.

## PIN ASSIGNMENT

P1 DEUTSCH 9P Receptacle P2 DEUTSCH 9P Plug P3 DB15 M

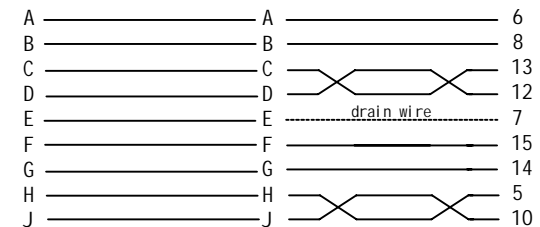

G	Outer appearance molding: 45P PVC, blue	1	PC
F	Inner molding: PE, white	1	PC
E	DB15 male connector core, with 2 screws	1	SET
D	Cable: UL2464, 20AWG*4C+20AWG*2P+drian wire+Al-foil, OD=8.5±0.2mm, black	1530	MM
C	Outer appearance molding: 45P PVC, blue	1	PC
B	Type II Deutsch Equivalent 9Pin plug: green core, red rubber seal, inner round ring & 9 terminals	1	SET
A	Type I Deutsch Equivalent 9Pin receptacle: black core, red rubber seal, inner round ring & 9 terminals	1	SET
Item	SPEC	QTY	UNIT

<b>CAR LINK</b> <b>凯连汽配</b>		Name	J1939 dual-headed to DB15 Male		
		Customer	KL68		
DWG	YY Wang	Part No.		Rev.	2.0
Check	Alex Young	Date	2018. 12. 3	N.W.	
Aprd		DWG No.	KL68-07	Unit	MM