




Human Computer Interfaces (HCI) Part 3

Prepared by: Dr Manal Tantawi

Associate professor in scientific computing department

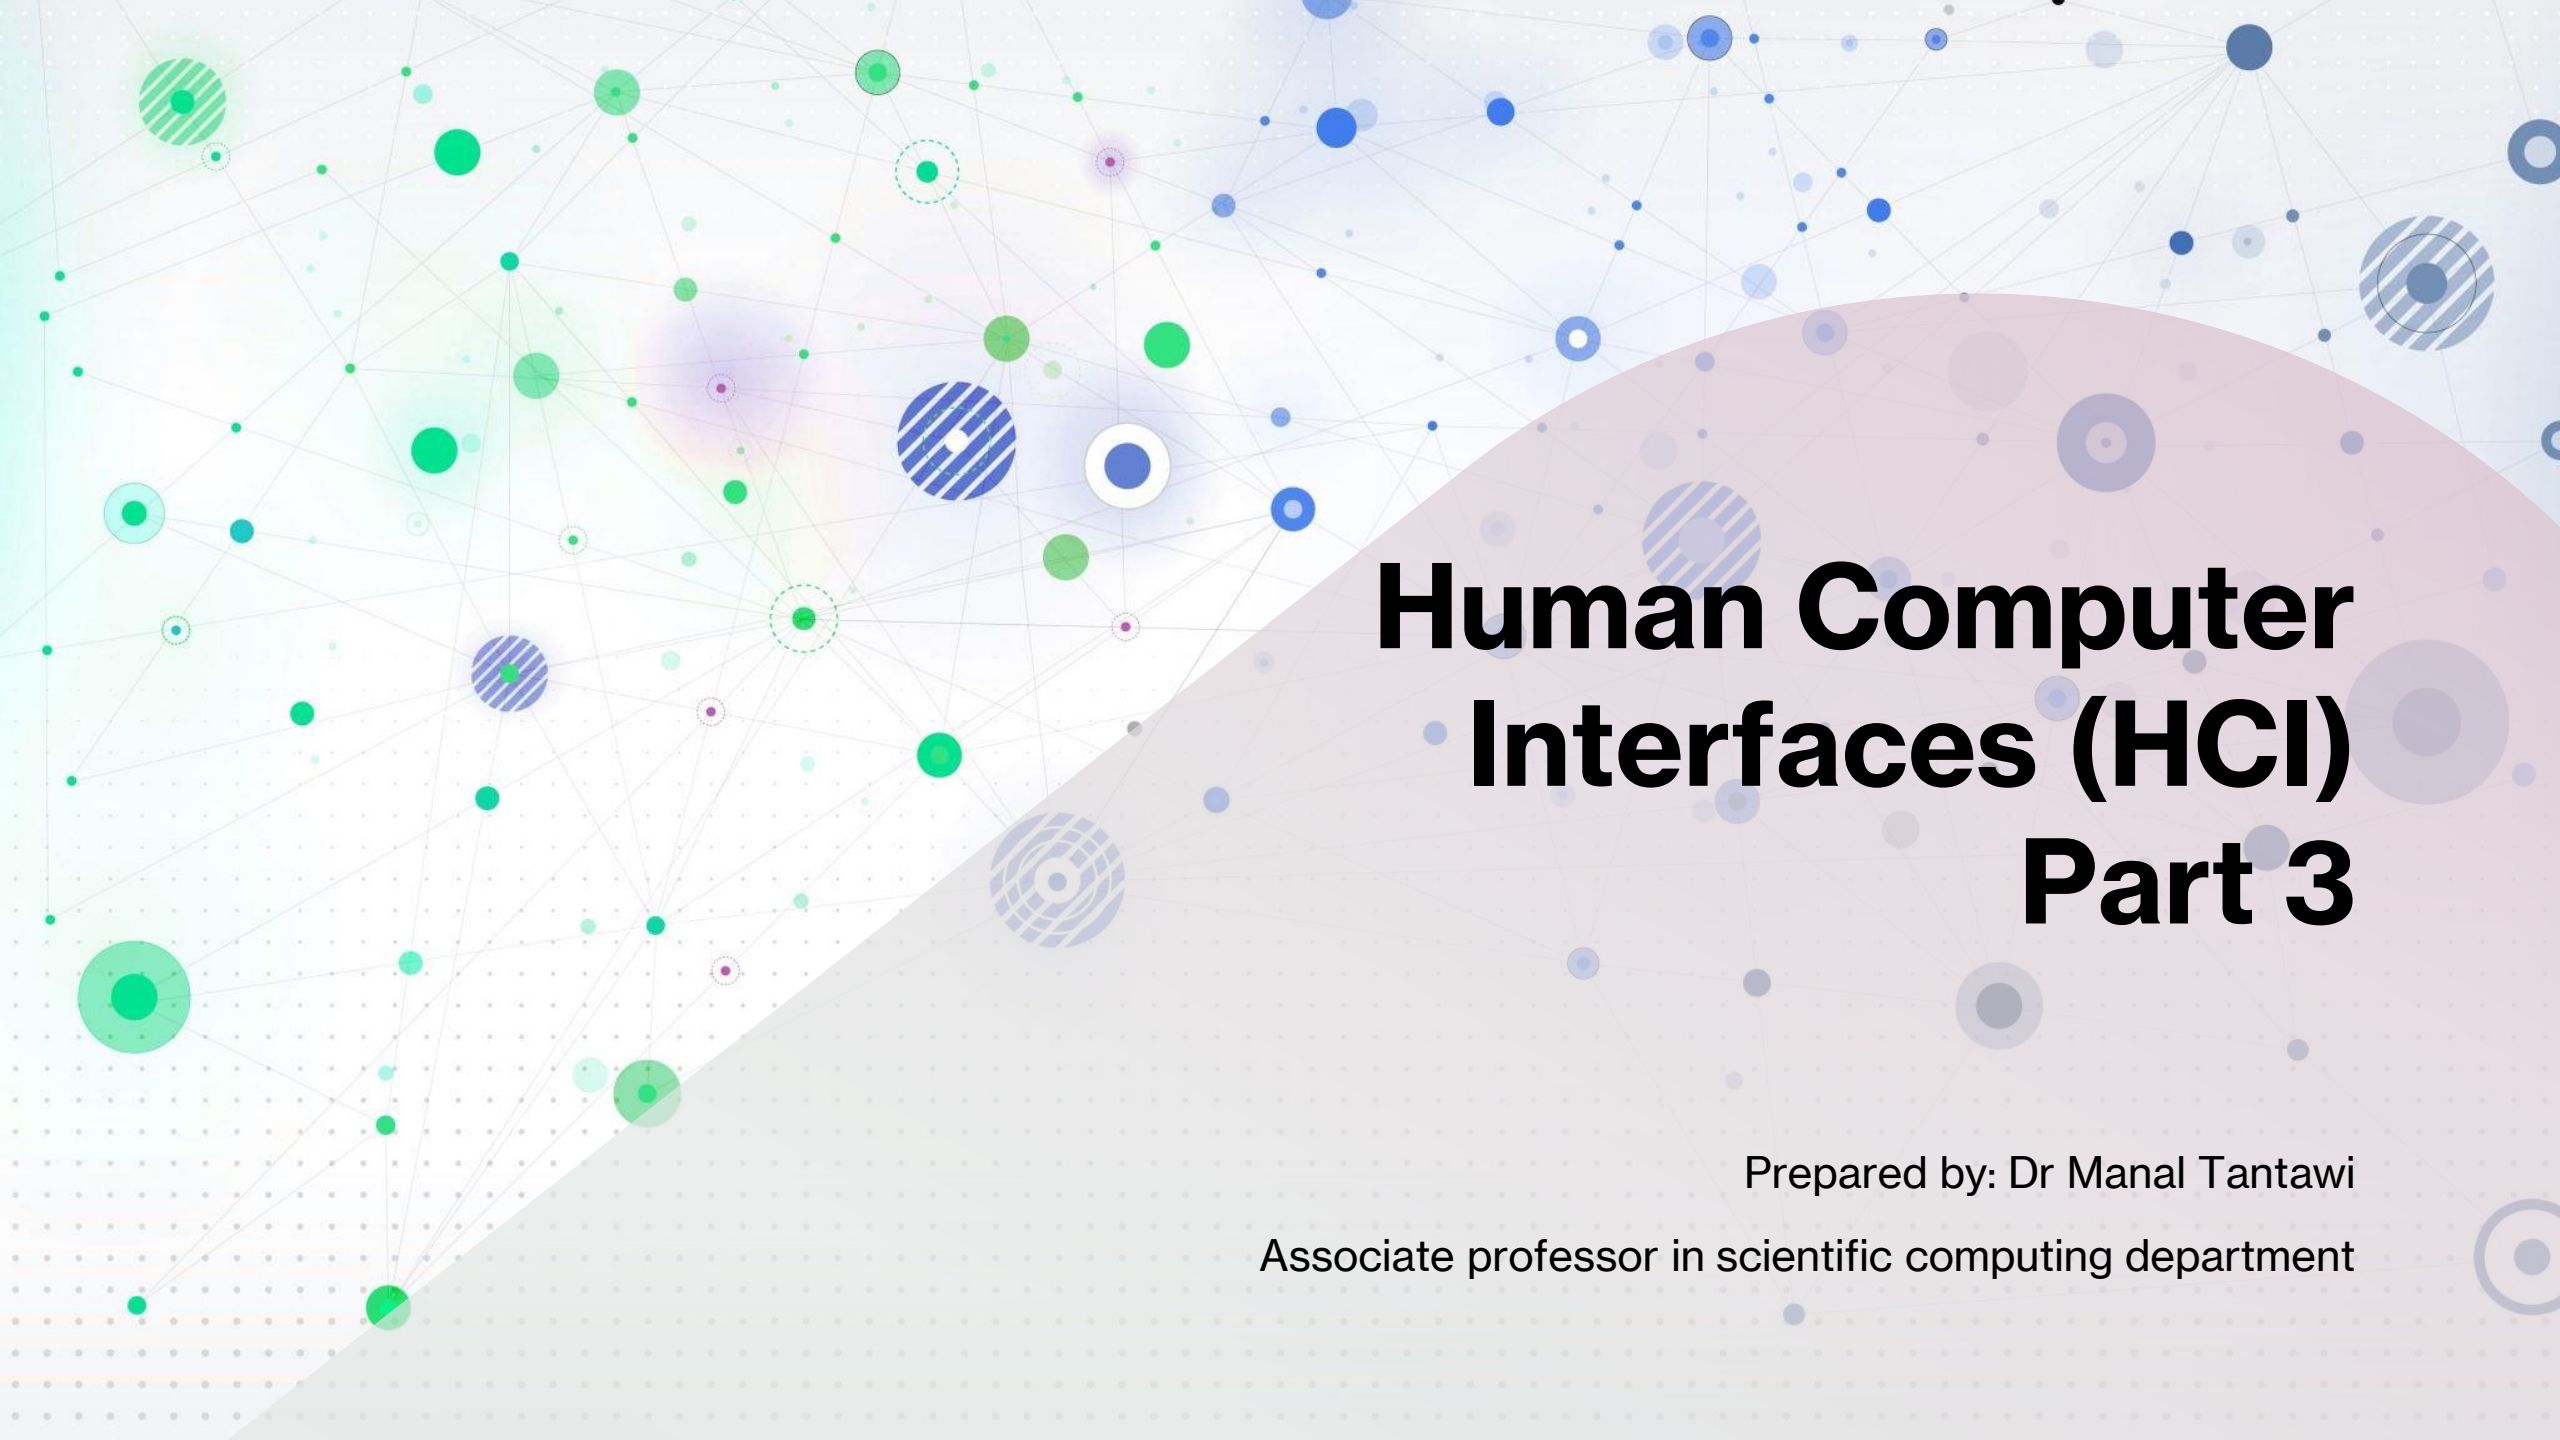

Biometrics

- ***Biometrics*** is a scientific approach to user verification and/or identification based on either anatomical or functional characteristics of the individuals.
- ***Biometric Interface*** is a pattern recognition system that is used to verify and/or identify a person's identity.



Application of Biometrics

- Prison visitor systems
- Border control systems
- Benefit payment systems
- Physical access control
- PC and network access control
- Time and attendance monitoring
- ATM and other transaction security
- Military and civilian homeland security




Identity Identification

- User's template is stored in system.
- User provides only live biometric sample for comparison with all templates in database.
- Identification looks for the best match to the input data. Hence, identify who the user is or if he\she is authorized or not.



Identity Identification

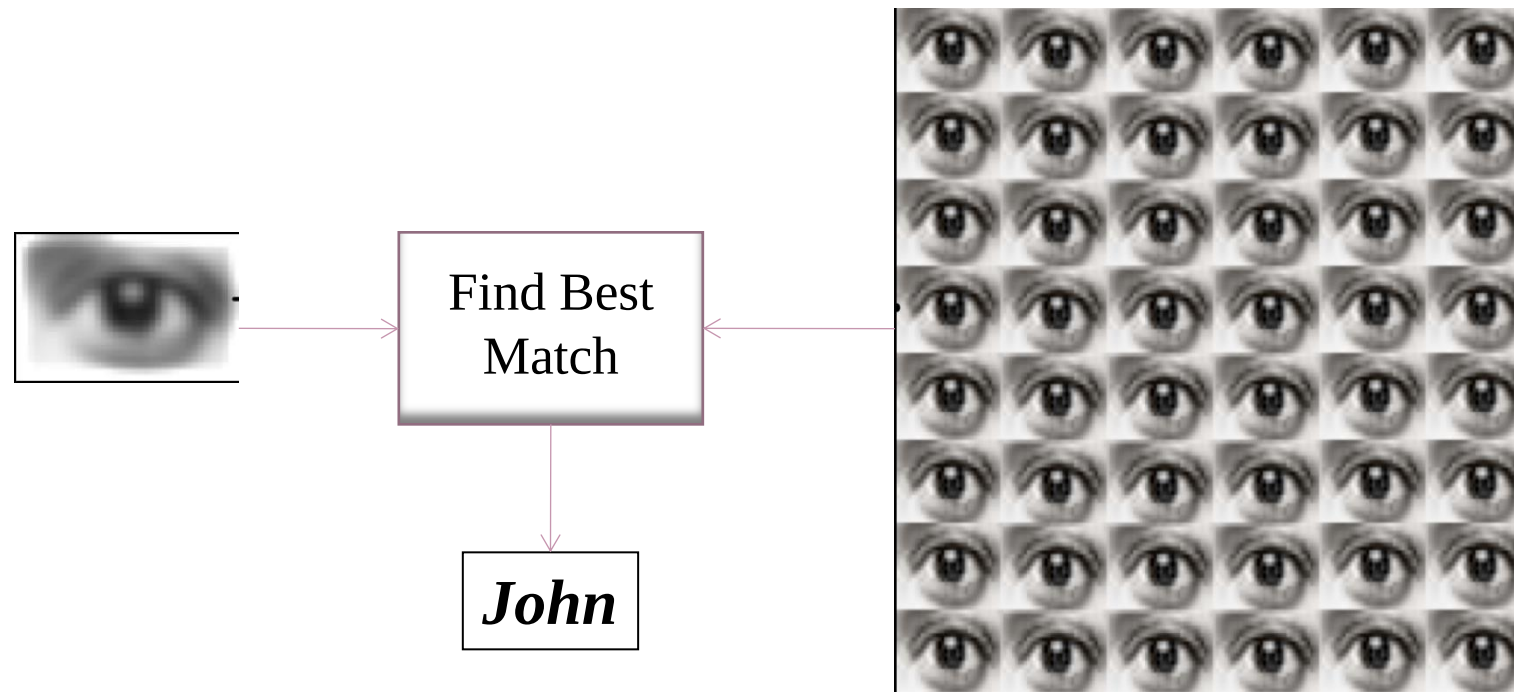




Identity Verification

- User's biometric template is stored in system or smart card.
- User enters account or PIN number to call up template.
- User provides live biometric sample for comparison.
- Identity verified if two biometric templates match using predefined threshold.



Identity Verification

Identity verification compares the input data with the previously recorded data.

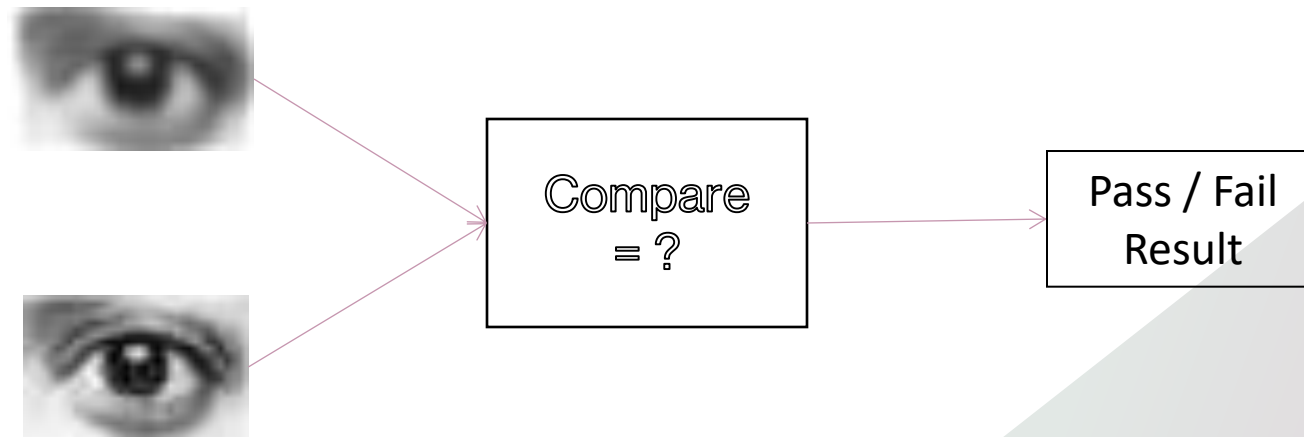




Biometric Systems: Modes of Operation

A biometric system operates in two modes:

1. ***Enrollment Mode:*** a user biometric data is acquired and stored in a database. The stored template is labeled with a user identity to facilitate authentication.
2. ***Authentication Mode:*** a user biometric data is acquired again, and the system use this to either identify who the user is or verify the claimed identity of the user.




Enrollment Mode

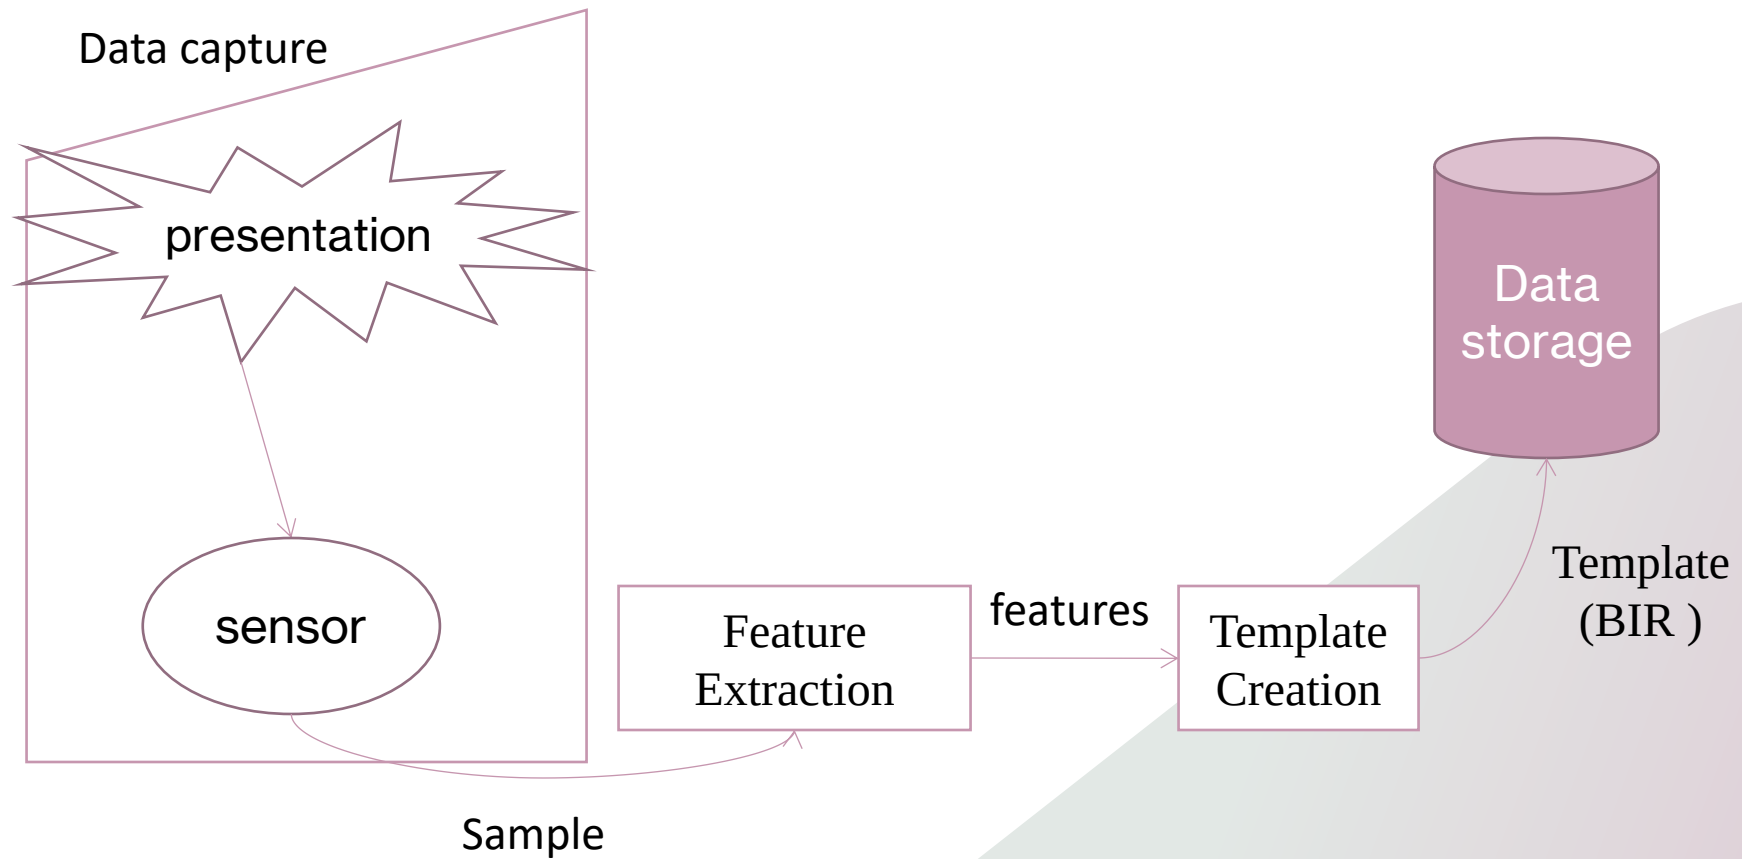



Authentication Mode

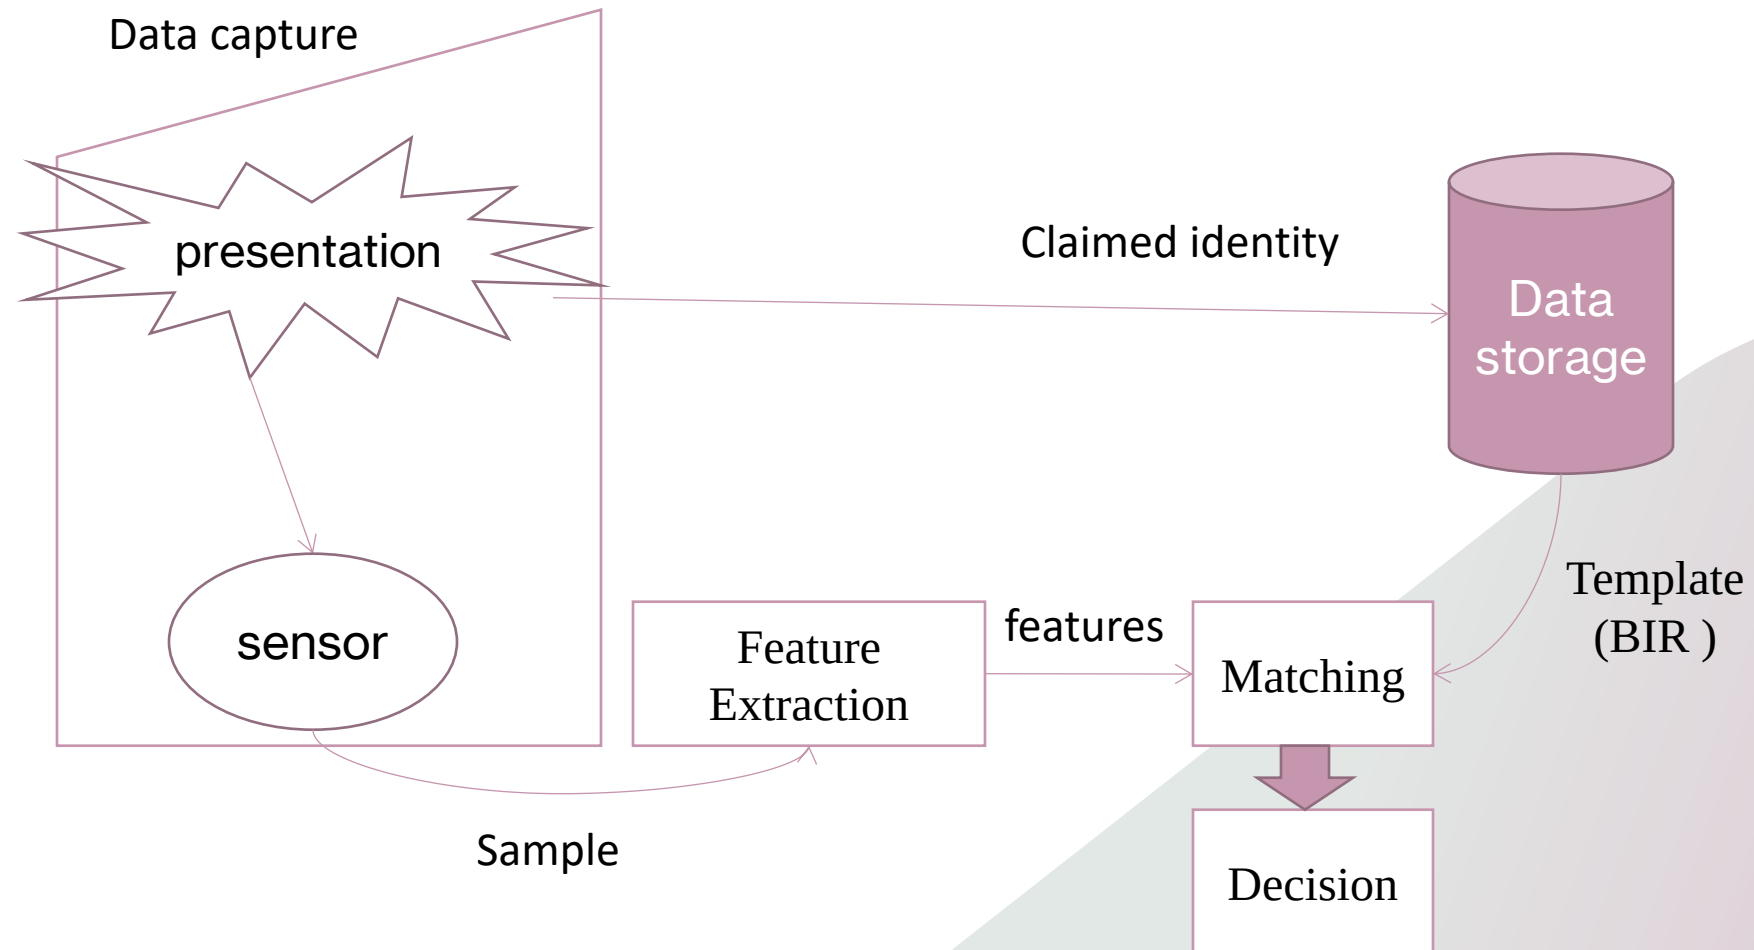



Performance metrics

In order to compare different implementations of any biometric, a measure of success and failure must be available in order to benchmark different implementations.

❖ False Acceptance Rate (FAR)

Type I error

False Match Rate (FMR)

Percentage of access attempts by unauthorized individuals which are nevertheless successful.

❖ False Rejection Rate (FRR)

Type II error


False Non-Match Rate (FNMR)

Percentage of access attempts by enrolled individuals who are nevertheless rejected.

❖ Equal Error Rate

Crossover Error Rate (CER)

$FAR = FRR$

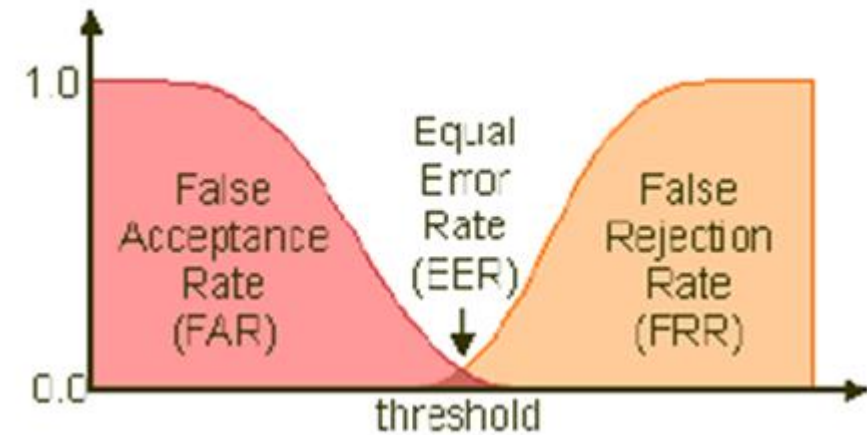



Important Considerations

1. Hardware (complicated or expensive)
2. Integration with applications or operating systems,
3. Characteristics of biometric signals:

Universability (everyone should have this trait)

Uniqueness (no two persons should be the same in terms of this trait)

Collectability (can be measured quantitatively)

Permanence (should be invariant with time)

Performance (achievable accuracy, resource requirement, robustness)

Acceptability (to what extent people are willing to accept it)


Circumvention (how easy it is to fool the system)



Physiological Biometrics



Fingerprint

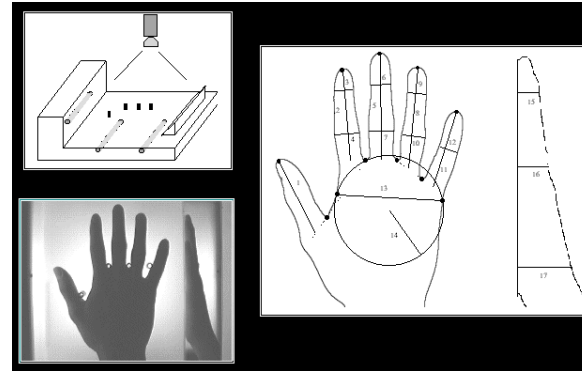


Hand Geometry




Vien Check



Iris print



Retinal Scan

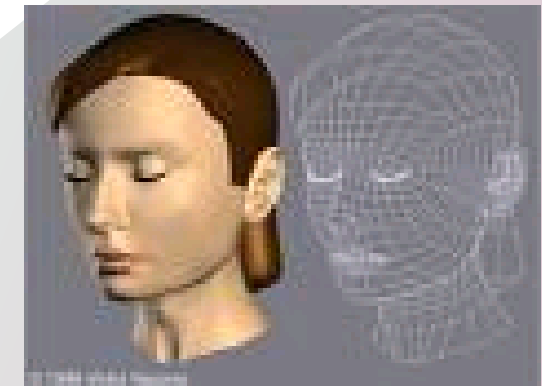

Face Recognition



Physiological Biometrics

- Physiological biometrics utilizes static anatomical features that are unique to an individual which are temporally invariant.
- Specialized (often expensive) hardware is utilized to extract the anatomical feature, which are then digitized and stored as a **biometrics identification record (BIR)**.
- Usually, high accuracy is achieved.
- Examples for anatomical features: fingerprint, iris and retina scans, face and hand geometry.



Behavioral Biometrics


- Behavioral biometrics utilize functional characteristics of an individual such as their signature, typing style or voice patterns.
- There is implicit simplicity to behavioral biometrics-no need for special hardware.
- The approaches prevalent in this domain is very familiar to us.
- The main challenge in this aspect is the behavioral features variability (with time).




Behavioral Biometrics

- There are variety of subdivisions within the behavioral biometrics' domain. Each subdivision has its own characteristics in terms of ease of use, deployability, user acceptance and quality of the identification/verification task. Key examples are as follows:
 1. *Voice recognition*
 2. *Signature verification*
 3. *Keystroke Dynamics*
 4. *Gait as biometric*

Behavioral Biometrics

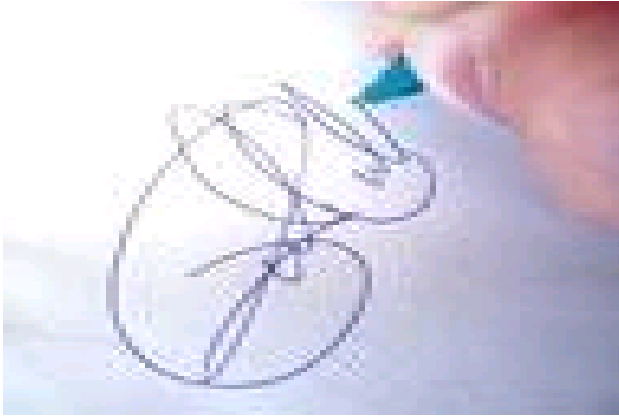


Signature



Voice



Keystrokes Dynamics

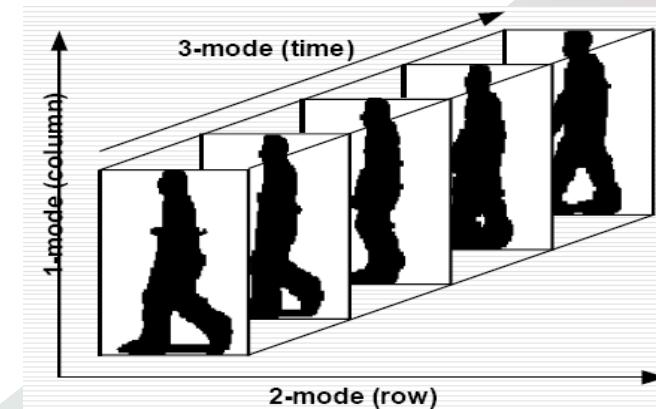

Gait



Physiological Versus Behavioral Biometrics

- Physiological biometrics are efficient and reliable due to their high accuracy, especially in case of using Iris. However, Physiological biometrics require dedicated and expensive hardware. In addition, they are less user acceptable than behavioral biometrics. Hence, they are not feasible for all application.
- For Behavioral biometrics , there is little (if any) need for specialized hardware and hence inexpensive , but unfortunately, they have lower accuracies due to their variability with time (ex: signature).
- These pros and cons encourage new alternative branches of biometrics which has been growing up over the past two decades such as:
 1. *Utilization of biological signals for Biometrics*
 2. *Multimodal biometric systems*
 3. *Multimodal biometrics systems that include biological signals (ex: ECG & Fingerprint based system)*



Biological Signals-based Biometrics



Biological Signals-based Biometrics


- Physiological biometrics encompasses anatomical traits that are unique to an individual such as: retina, iris and fingerprint, while behavioral biometrics considers with functional traits such as: signature, keystroke and gait.
- Although physiological biometrics has recorded lower error rates than behavioral biometrics, physiological biometrics requires dedicated and expensive hardware. In addition, they are less user acceptable than behavioral biometrics.
- Recently, a new alternative branch of biometrics which has been growing up over the past two decades is the utilization of biological signals such as the electroencephalogram (EEG) and electrocardiogram (ECG).



ECG Motivation

- The main potential benefits of utilizing ECG as a biometric trait can be summarized as follows:
- Uniqueness, The nature of an ECG waveform makes it carry the physiological and geometrical differences of the heart yielding a significant inter-variability among individuals .
- As a biological signal, ECG not only provides a distinctive mark for different individuals as the other biometric traits, but also it distinguishes itself by providing an aliveness indicator .
- Circumvention, by comparing ECG to other biometric traits, it is found that it is more difficult to be spoofed or falsified and more universal since it is a vital signal .
- ECG is less expensive and more user acceptable than physiological traits. In addition, it is more reliable than *behavioral* traits .

Electrocardiogram (ECG) based Biometrics

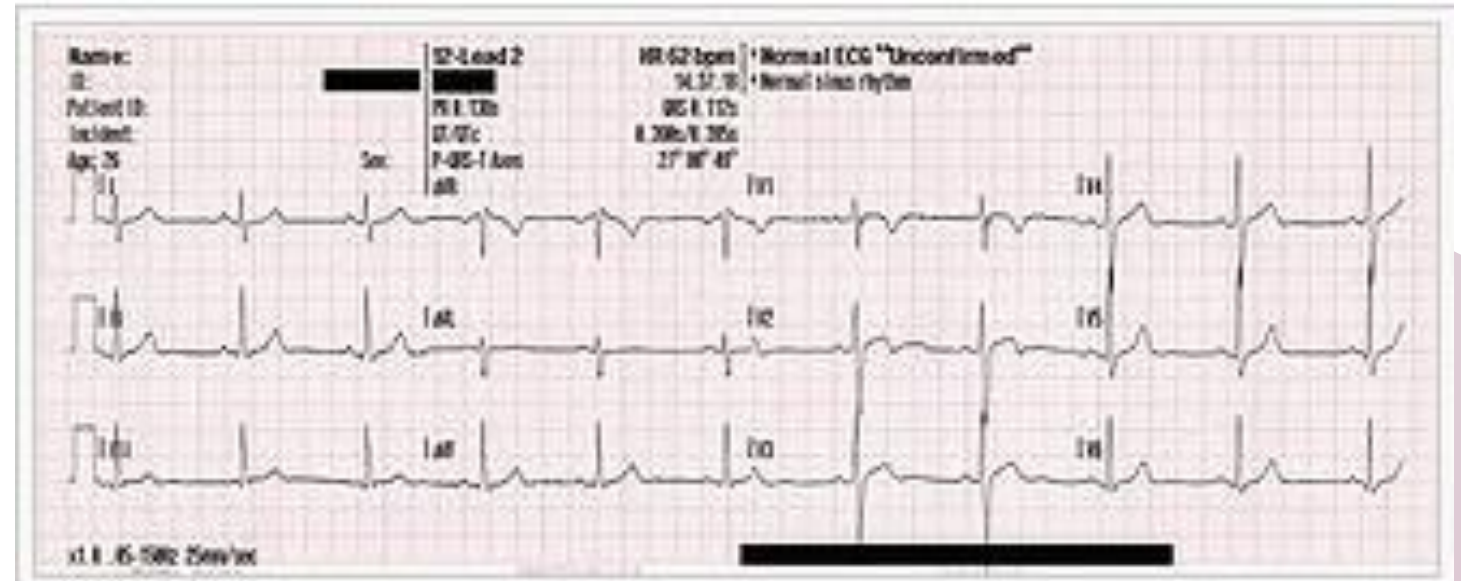


THE HEART ANATOMY





The HEART Organ


- The heart is a powerful muscle that lies in the chest cavity between the lungs and is slightly larger than the one's clenched fist.
- A heartbeat is the physical contraction of the heart muscles for pumping blood.

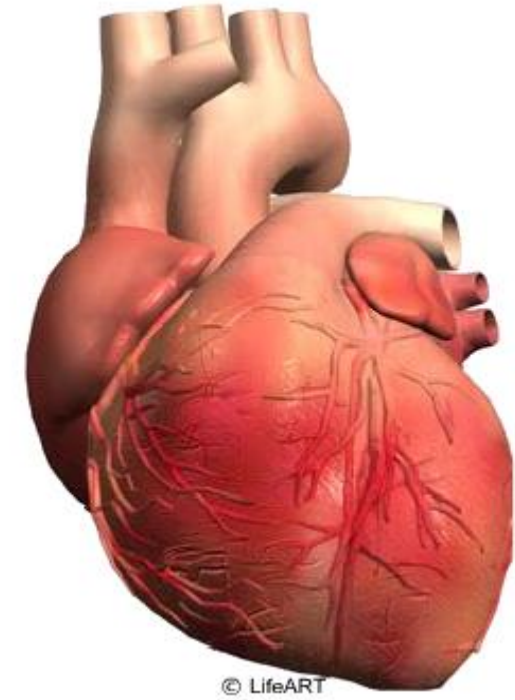



The HEART Anatomy


- It is composed of four chambers, many large arteries, many veins and valves.
- A wall of muscle divides the heart into two cavities: Two chambers of the heart lie in the left cavity and two chambers lie in the right cavity. The four chambers are called *atria* and *ventricles*. The two upper chambers of the heart are called atria (one of them is called atrium); the bottom chambers are called ventricles.

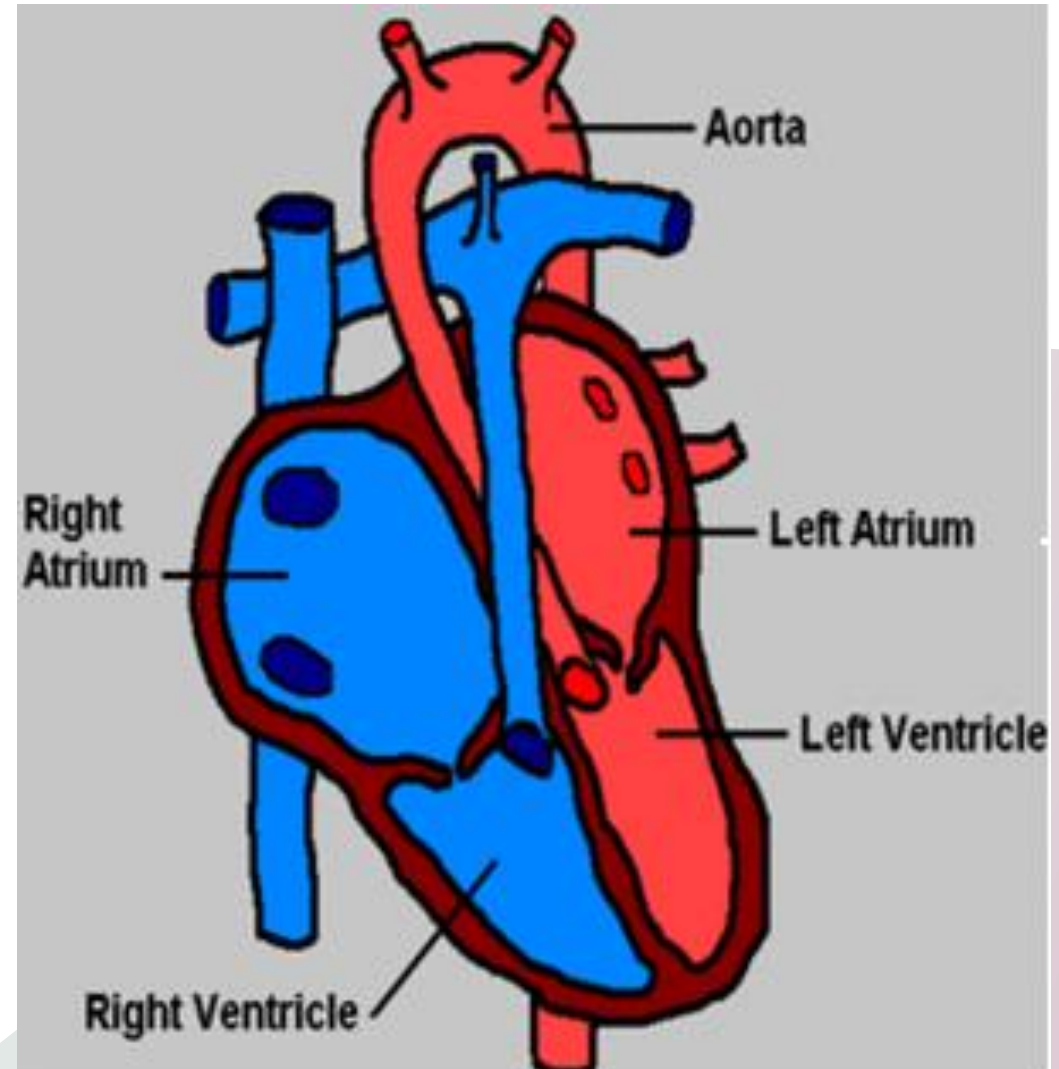



How the heart functions electrically

- The heart normally beats between 60 and 100 times per minute. This rate is set by a small collection of specialized heart cells called the Sinoatrial (SA) or sinus node, which is located in the right atrium.
- The SA node is the heart's "natural pacemaker." It discharges by itself without control from the brain. Two events occur with each discharge: (1) both atria contract; (2) an electrical impulse travels through the atria to reach another area of the heart called the Atrioventricular (AV) node, which lies in the wall between the two ventricles.

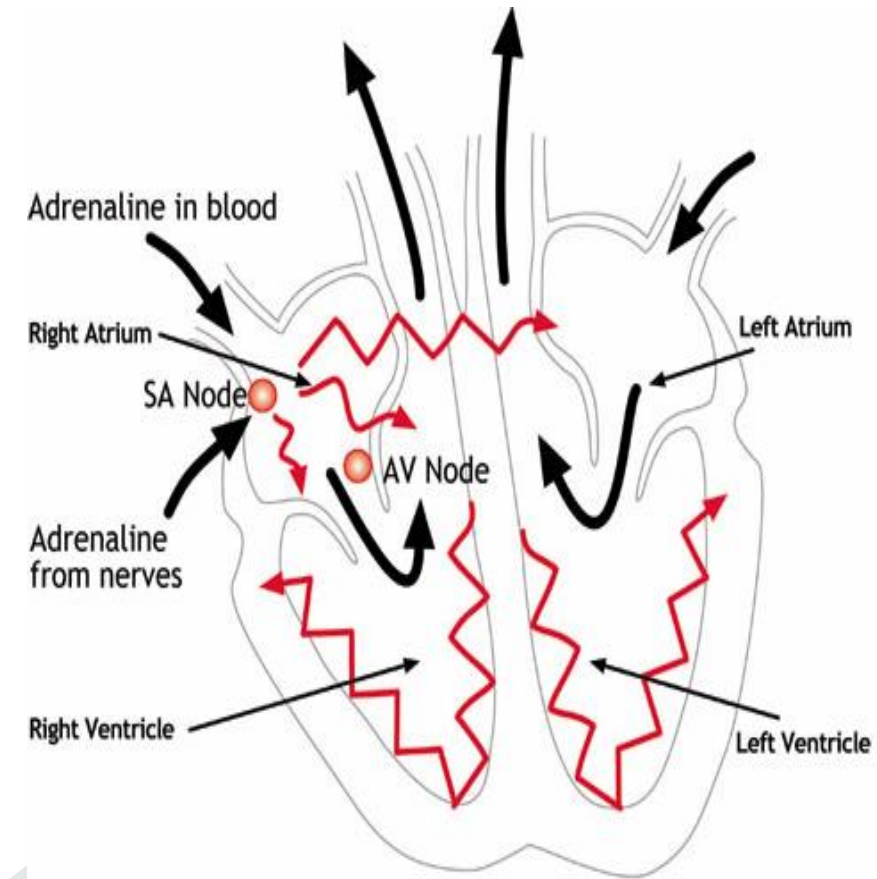



How the heart functions electrically

- The *AV node* serves as a relay point to further propagate the electrical impulse. From the *AV node*, an electrical wave travels to ventricles, causing them to contract and pump blood. The blood from the right ventricle goes to the lungs, and the blood from the left ventricle goes to the body.
- The normal delay between the contraction of the atria and of the ventricles is 0.12 to 0.20 seconds. This delay is perfectly timed to account for the physical passage of the blood from the atrium to the ventricle. Intervals shorter or longer than this range indicate possible problems.



How the heart functions electrically

- The *AV node* serves as a relay point to further propagate the electrical impulse. From the *AV node*, an electrical wave travels to ventricles, causing them to contract and pump blood. The blood from the right ventricle goes to the lungs, and the blood from the left ventricle goes to the body.
- The normal delay between the contraction of the atria and of the ventricles is 0.12 to 0.20 seconds. This delay is perfectly timed to account for the physical passage of the blood from the atrium to the ventricle. Intervals shorter or longer than this range indicate possible problems.



The Electrocardiogram (ECG or EKG) signals


- The term electrocardiogram (ECG) was introduced by Willem Einthoven in 1893 .
- ECG is recorded by placing electrodes (up to 12 electrodes) at various strategic body points such as chest, neck, arms, and legs.
- The ECG machine records the electrical activity (electrical impulses) of the heart in exquisite detail that results when the heart muscle cells in the atria and ventricles contract. The results of the impulses are displayed on a computer monitor and then printed onto graph paper.



ECG Signal




The ECG traces three complex waves: P, QRS and T waves.

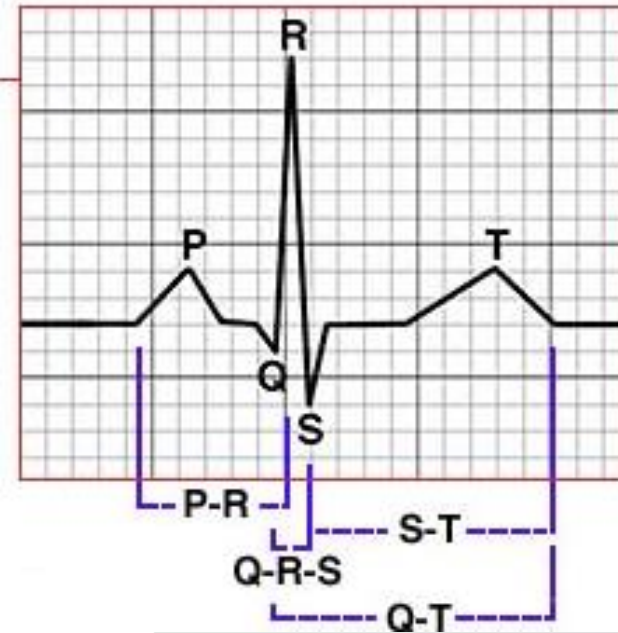




ECG Signal

The *Atria* contractions (both right and left) shows up as the *P wave*; while the ventricular contractions (both right and left) show as a series of 3 waves, Q-R-S, known as the QRS complex; finally, the third and last common wave in an ECG is the *T wave*. This reflects the electrical activity produced when the ventricles are recharging for the next contraction (repolarizing).

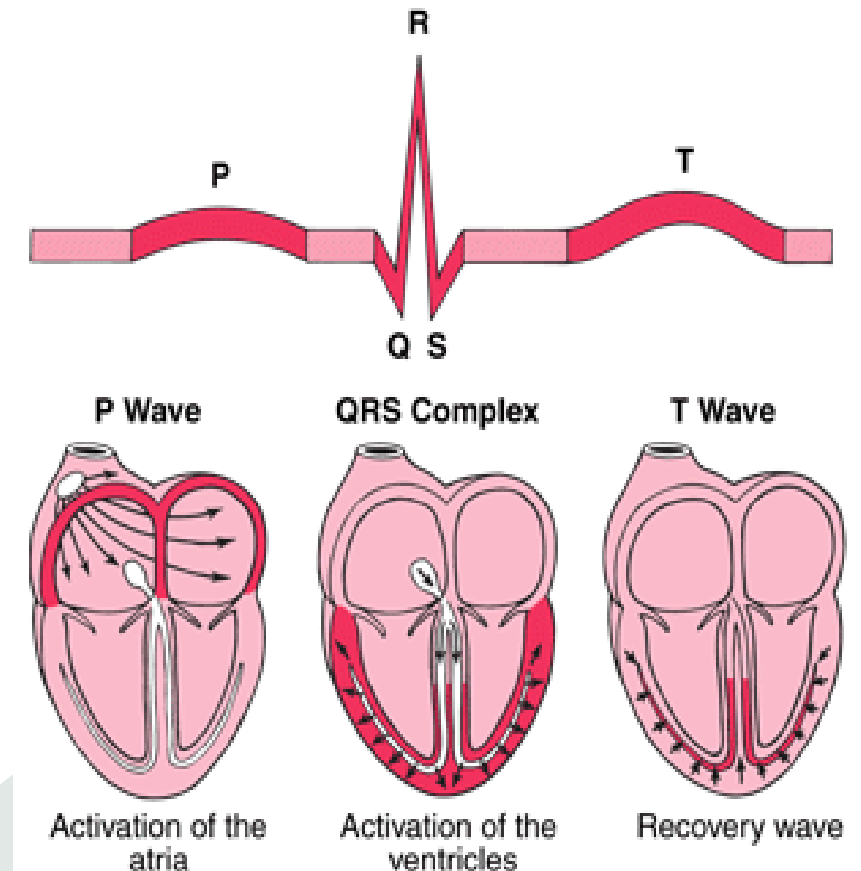



ECG Signal

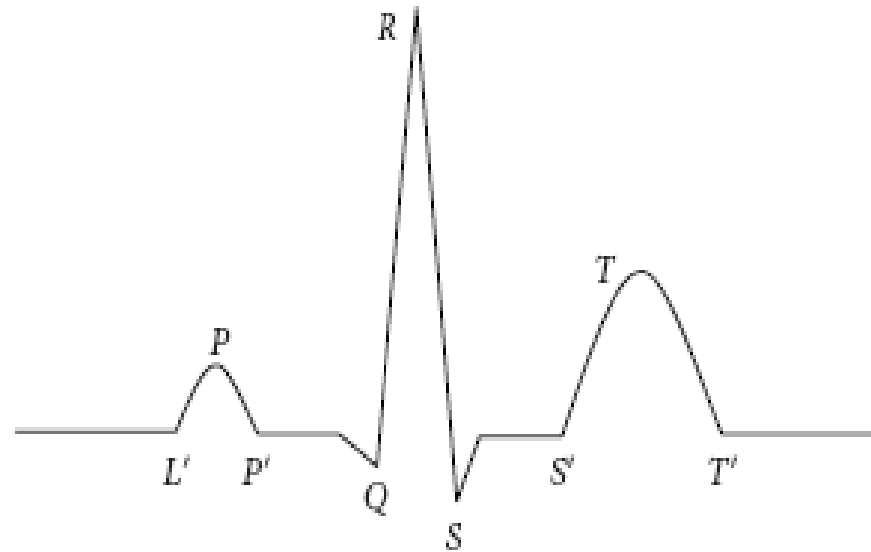

- The three complex waves differ in their durations and spectral characteristics. The duration of the P wave is less than 120 milliseconds. The spectral characteristic of a normal P wave is usually considered to be low frequency, below 10–15 Hz.



ECG Signal

- The *QRS* complex lasts for about 70–110 milliseconds in a normal heartbeat, and it has the largest amplitude of the ECG waveforms. Due to its steep slopes, the frequency content of the *QRS* complex is considerably higher than that of the other ECG waves, and it is mostly concentrated in the interval of 10–40 Hz.
- Finally, the *T* wave extends about 300 milliseconds after the *QRS* complex. The position of the *T* wave is strongly dependent on heart rate, becoming narrower and closer to the *QRS* complex at rapid rates.



ECG Signal

- The *QRS* complex lasts for about 70–110 milliseconds in a normal heartbeat, and it has the largest amplitude of the ECG waveforms. Due to its steep slopes, the frequency content of the *QRS* complex is considerably higher than that of the other ECG waves, and it is mostly concentrated in the interval of 10–40 Hz.
- Finally, the *T* wave extends about 300 milliseconds after the *QRS* complex. The position of the *T* wave is strongly dependent on heart rate, becoming narrower and closer to the *QRS* complex at rapid rates.




Benefits of ECG

- ECG is a wealth source of information, and it has been used as a reliable diagnostic tool since the early 20th century.
- It carries information about heart rate, heart rhythm and morphology.
- it can indicate the weaknesses in different parts of the heart muscle.
- The ECG can also identify if the heart muscle has been damaged in specific areas.
- In the last two decades, it has been discovered that crucial information about human identity can be deduced from an ECG recording .this by its role open up the possibility of using ECG as a new biometrics modality for human identification.



Stages of an ECG Based Classification System

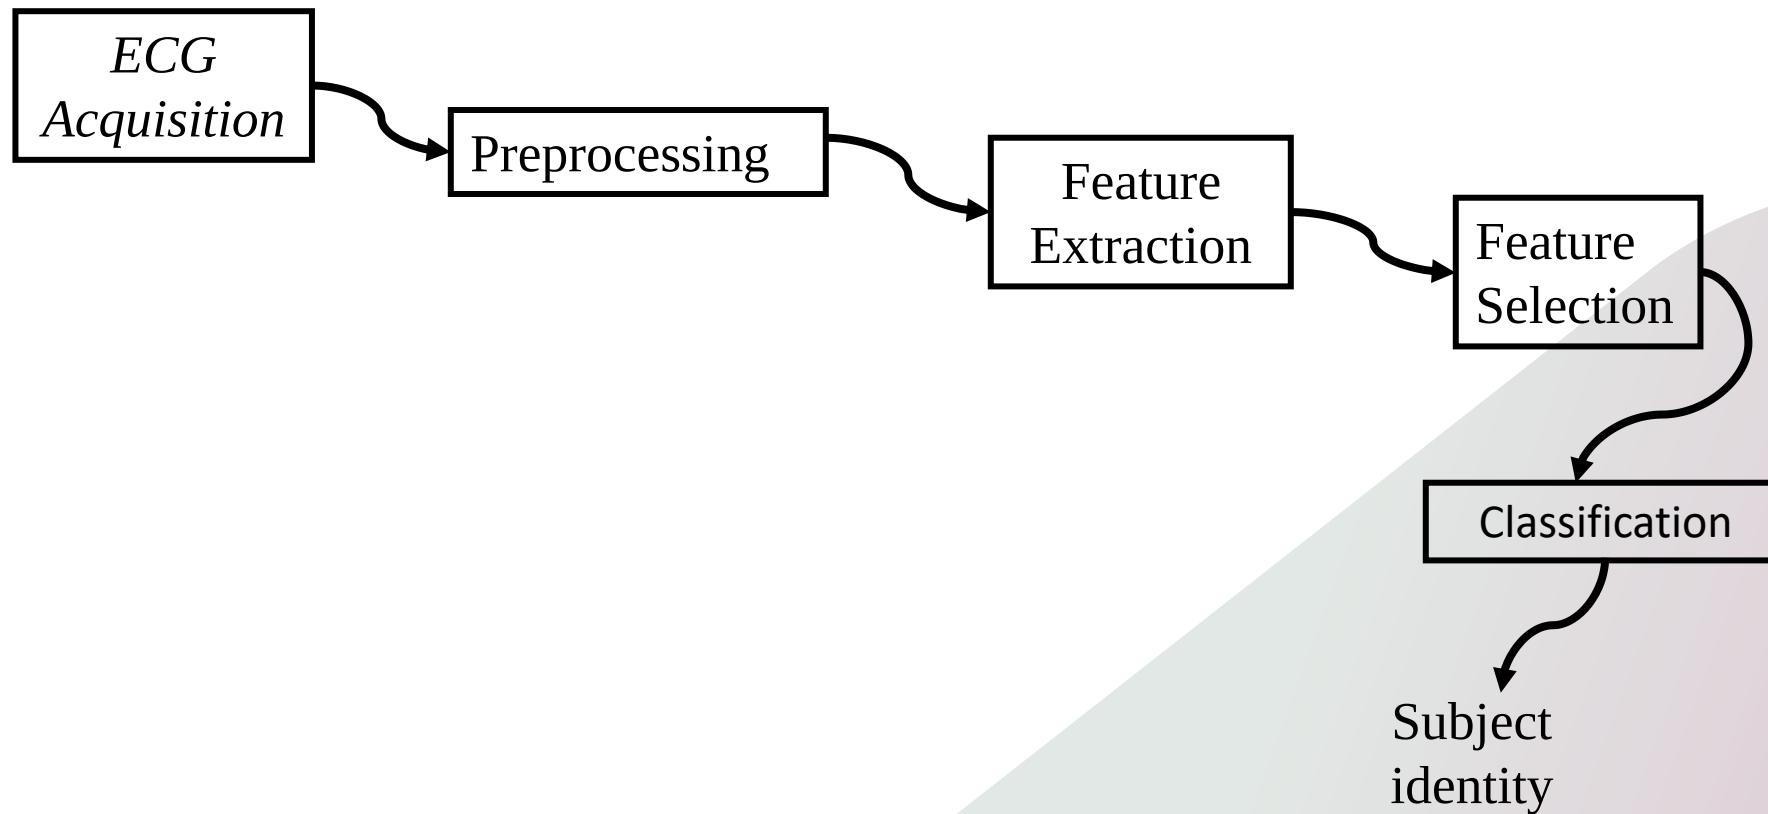



Data Acquisition

- In the beginning, there were no datasets for identification use. Hence, ECG data captured using hospital devices (ex: 12 leads) has been used for training different models. The commonly used datasets are MIT-BIH, PTB, QT and Fantasia.
- Recently, new devices have been emerged to facilitate capturing data for biometric uses. Hence, new large datasets (ex: ECG-ID, E-HOL-03-0202-003 and CYBHI) have been collected using these devices and utilized successfully for biometrics.

Data Acquisition (Recently available devices)



(a) Vital Jacket



(b) RespiBan



(c) Nymi Band



(d) Read My Heart



(e) Vernier ECG sensor



(f) Philips PageWriter Trim III



(g) Shimmer ECG sensor



(h) BioPLUX Electrocardiography sensor



(i) Maxim 85150 Evaluation Kit



(j) The Bioradio



(k) Biopac MP160




(l) Kardia by Alivecor



Preprocessing

Raw ECG data contain noise and artifact components that alter the expression of the ECG trace from the ideal structure and render any interpretation inaccurate and misleading.

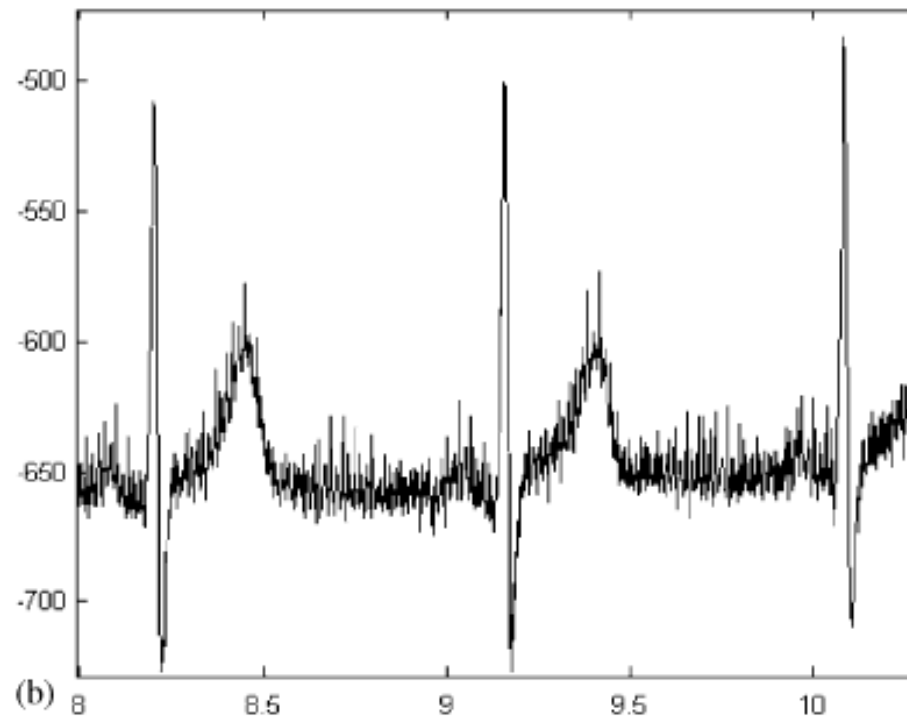



Preprocessing


ECG Noise Sources

Noise name	Noise source(s)	Amplitude	Spectral content	Comment
Baseline wander	perspiration, respiration, body movements, and poor electrode contact	exceed the amplitude of the QRS complex	interval below 1Hz	Removed by band path filter
<i>Electrode motion artifacts</i>	skin stretching which alters the impedance of the skin around the electrode	large amplitude waveforms	Interval between 1 and 10 Hz	overlaps ECG spectra
<i>Power line interference</i>	interferences from nearby equipments as a result of improper grounding of the ECG equipment		50/60 Hz	Removed by band path filter
<i>Electromyographic noise (EMG)</i>	electric al activity of skeletal muscles during periods of contraction or due to a sudden body movement		Overlap with spectra of the QRS complex and extends to higher frequencies	overlaps ECG spectra with a part of its spectra



Preprocessing

Most of the existing systems utilize a simple Butterworth filter with cut-off frequencies of 1 - 40Hz (ECG spectra) in order to remove noise. However, not all frequencies of noise are below 1 or more than 40 Hz, some of them overlap with the spectra of the ECG signal .

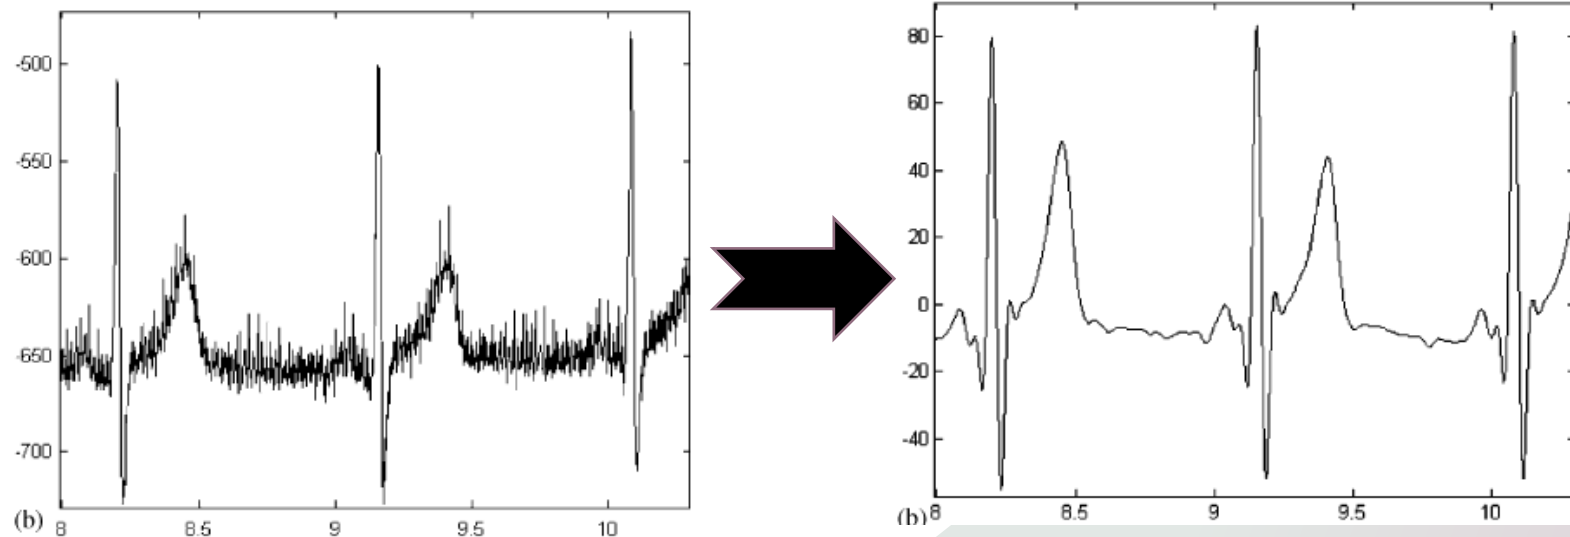




Feature Extraction

- There are two kind of features: fiducial and non-fiducial features.
- The fiducial features represents the amplitude of the signal fiducial points: P, Q, R, S and T and also the durations between them.



Fiducial Points Detection

- Detection of fiducial points includes detecting 11 points that represent the peak and the end points of each of the three complexes QRS, P and T.

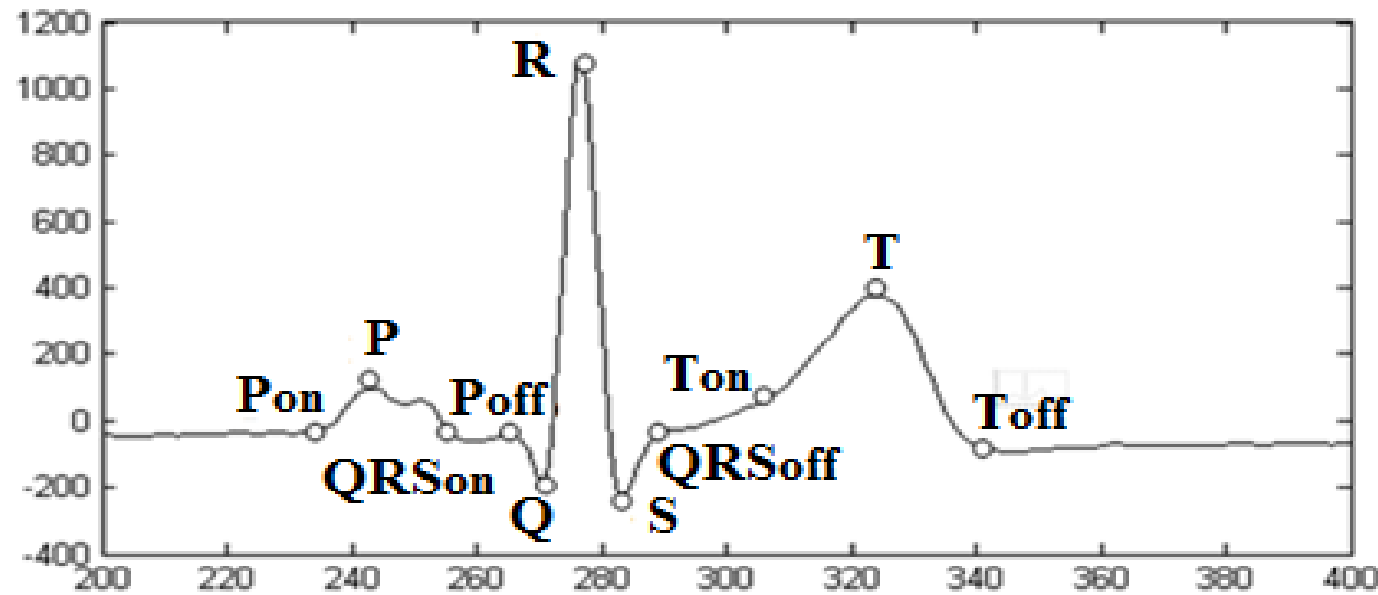



Fiducial Points Detection (QRS complex)


- The most popular algorithm for QRS complex detection is Pan and Tompkins.
- The algorithm is implemented in a series of steps: 1) low & high pass filtering; 2) differentiation; 3) squaring; 4) moving-window integration; 5) thresholding; 6) search back for missing R waves and remove misclassified T waves as R waves due to their height.



Fiducial Points Detection (QRS complex)

R peak

- After detecting R peak Q and S can be detected as finding local minimum before and after R peak.
- In addition, the beginning and end of QRS can be found by detecting the onset and offset of the peak in (4), since peak in (4) includes all the QRS complex.

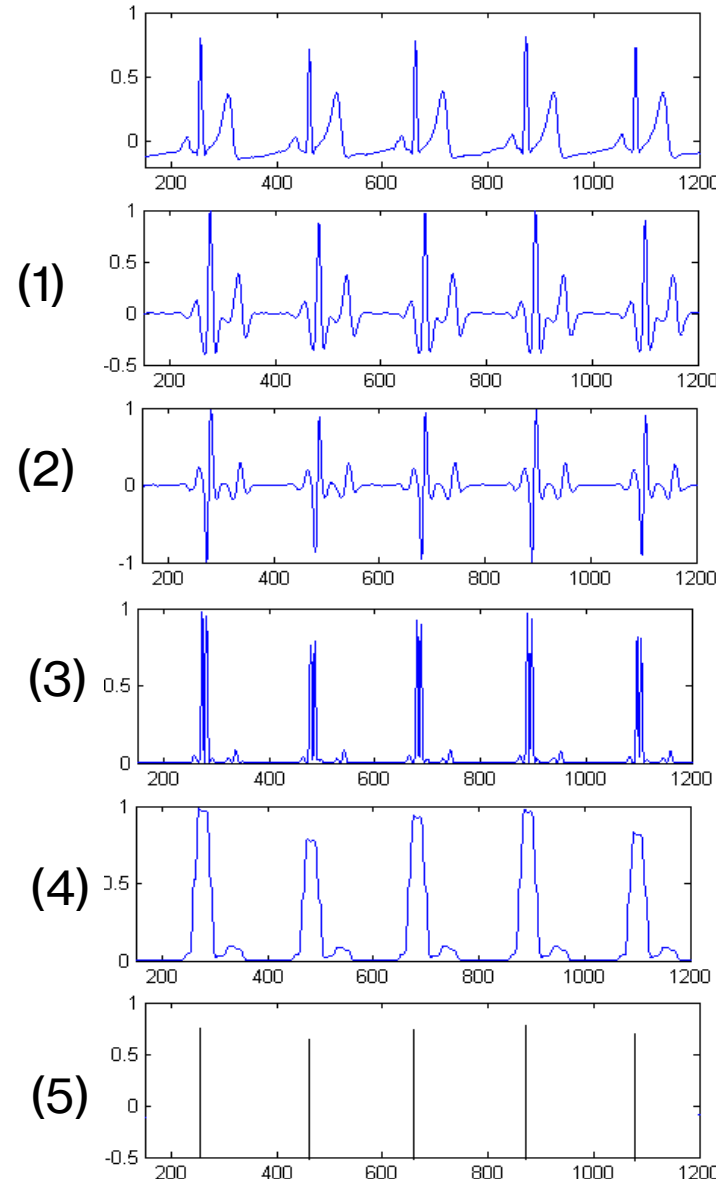




Fiducial Points Detection (P peak)

Example

- A search window is defined for the p wave before the QRS complex. It begins from the QRS onset with width 200ms (medical base). The peak of the p wave is the local maximum in the search window. If two peaks are found with ratio between them is less than Θ_r and duration between them less than Θ_d then this p wave has a M shape. In this case the P peak is considered the one with higher amplitude. Θ_r and Θ_d are found empirically.

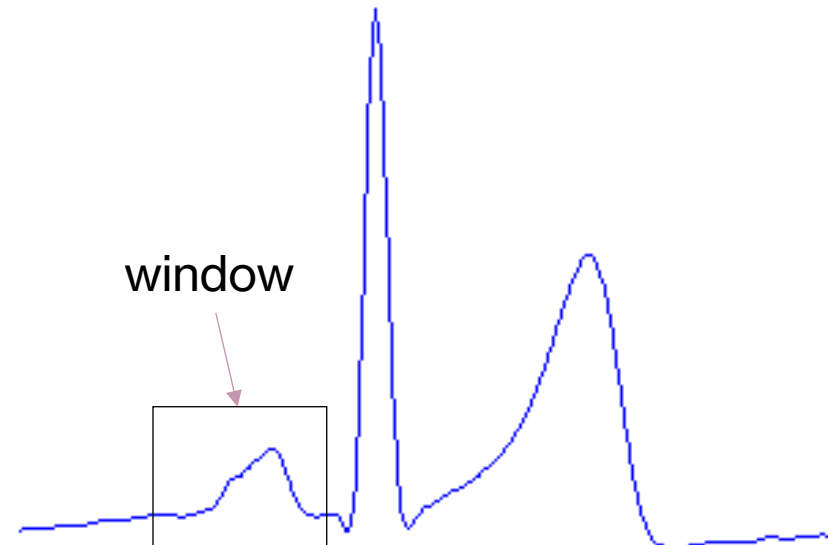



Fiducial Points Detection (T peak)

Example

A search window is defined after the QRS complex to detect T peak. It begins from the QRS offset and remains for 400ms (figure 5.4 (b)). This width of the window was computed empirically through experiments on medical base. The T peak can be detected using the wing functions. This method has been chosen due to its efficiency, simplicity and its ability to detect both positive and negative (inverted) T waves. The 'wings' function obtained at each successive sample in the search window, wings are modeled with 2 neighboring segments W1 and W2 as follows:

$$W_1 = X_{i-16} - X_i$$

$$W_2 = X_i - X_{i+16}$$



where, X is the input sample to the wing function.



Fiducial Points Detection (T peak)

Example

- A Wing function W is computed by multiplying $W1$ and $W2$. The minimum point of the W signal inside the search window is considered the T peak.

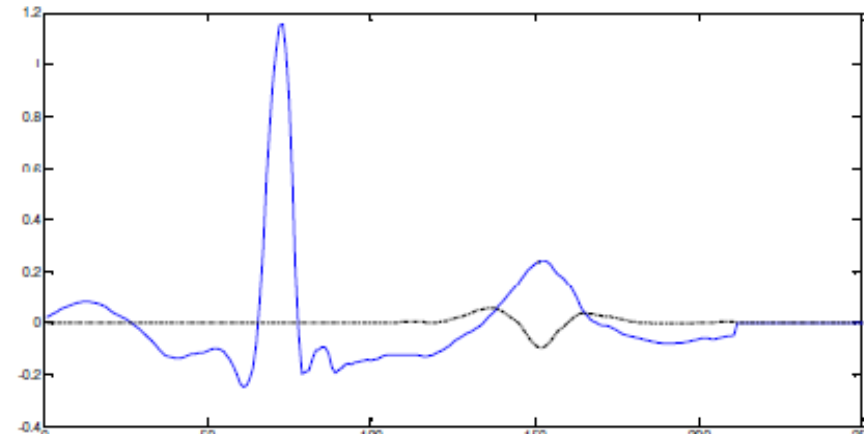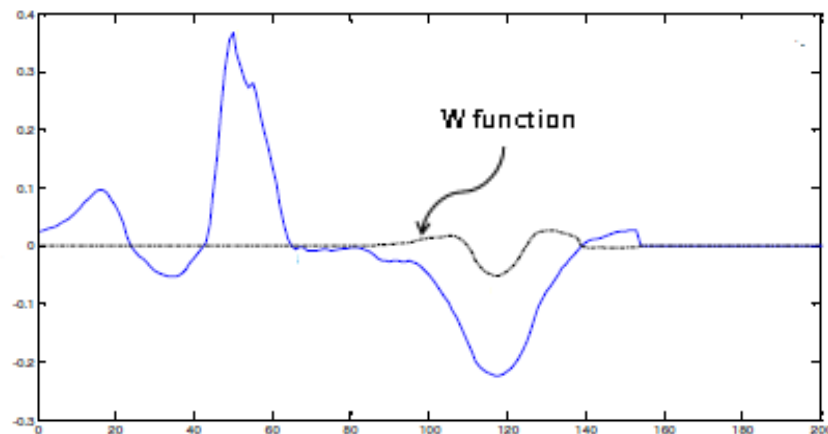




Fiducial Points Detection (onset & offset of each wave)

Example


- The onset & offset of each wave can be computed by defined using the method of minimum radius of curvature. The onset is defined by tracking downhill from the right side, the X and Y fixed then the minimum radius of curvature is found by maximizing the value of δ using the vector cross product between the two directed line segments a and c.
- The offset is defined in the same way but this time by tracking downhill from the left side of the P wave. For M shape P wave, to define the onset we track downhill before left peak, while for the offset we track downhill after the right peak. In case of the negative T wave (inverted), the same algorithm is applied but this time we are climbing up the valley not tracking downhill as in the positive case.

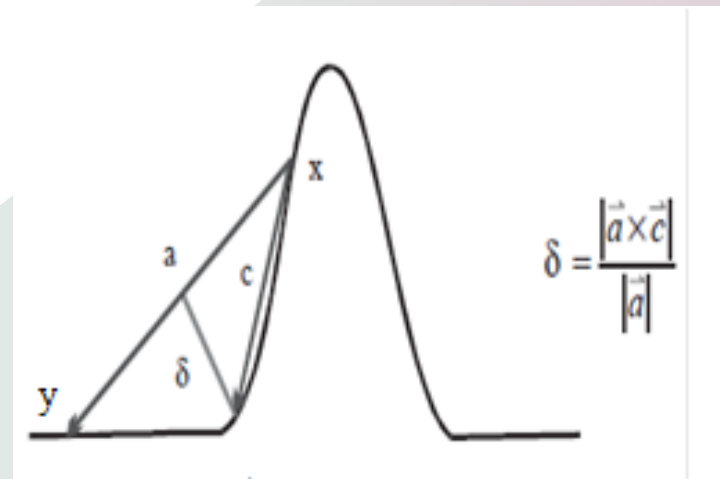

Fiducial Points Detection




➤ The detected 11 fiducial points

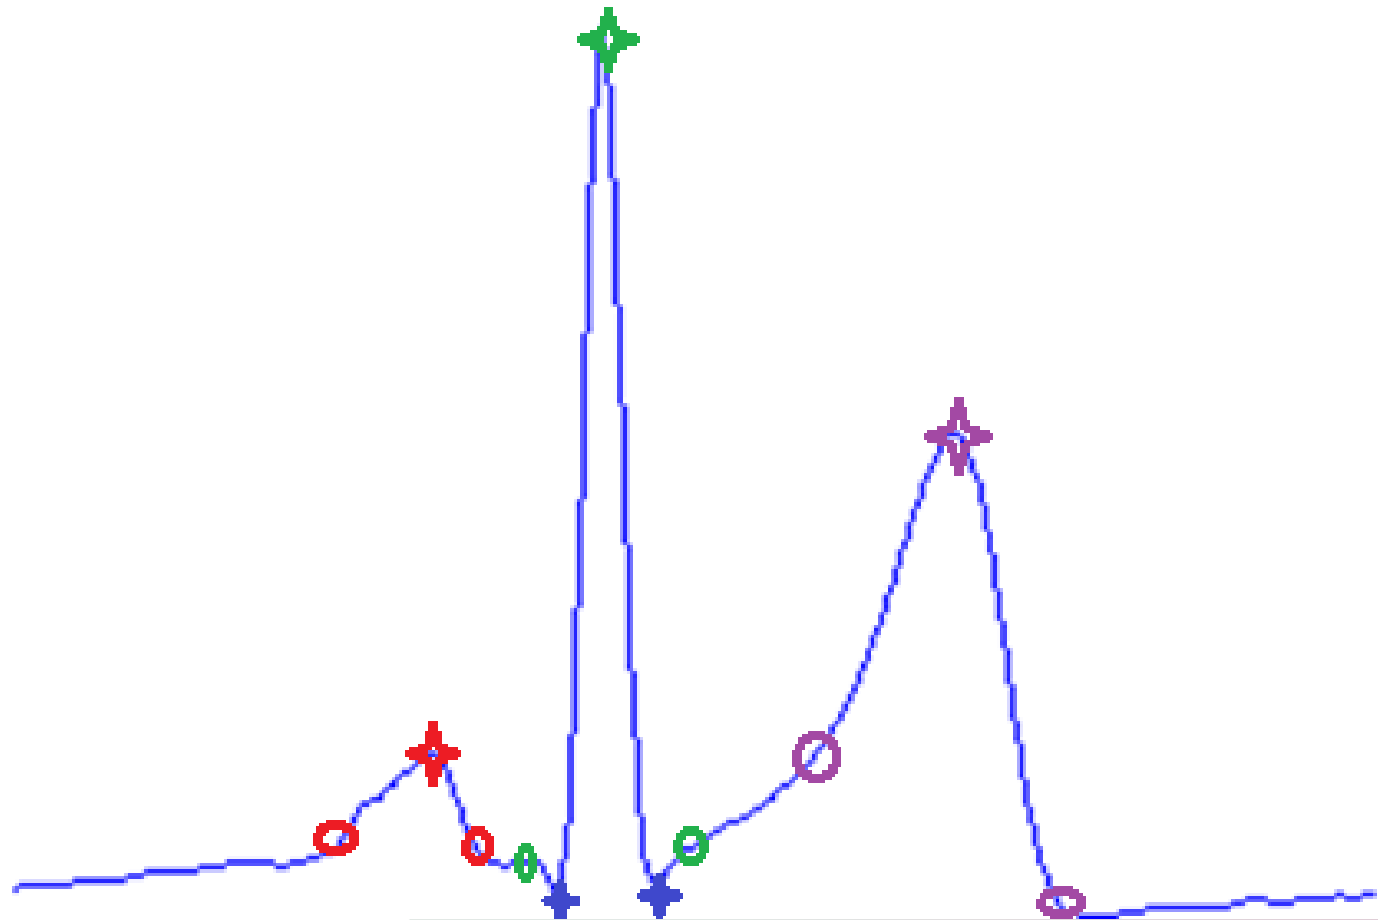



Feature Extraction (fiducial features)

To avoid heart rate variability, duration features are usually divided by QT duration.

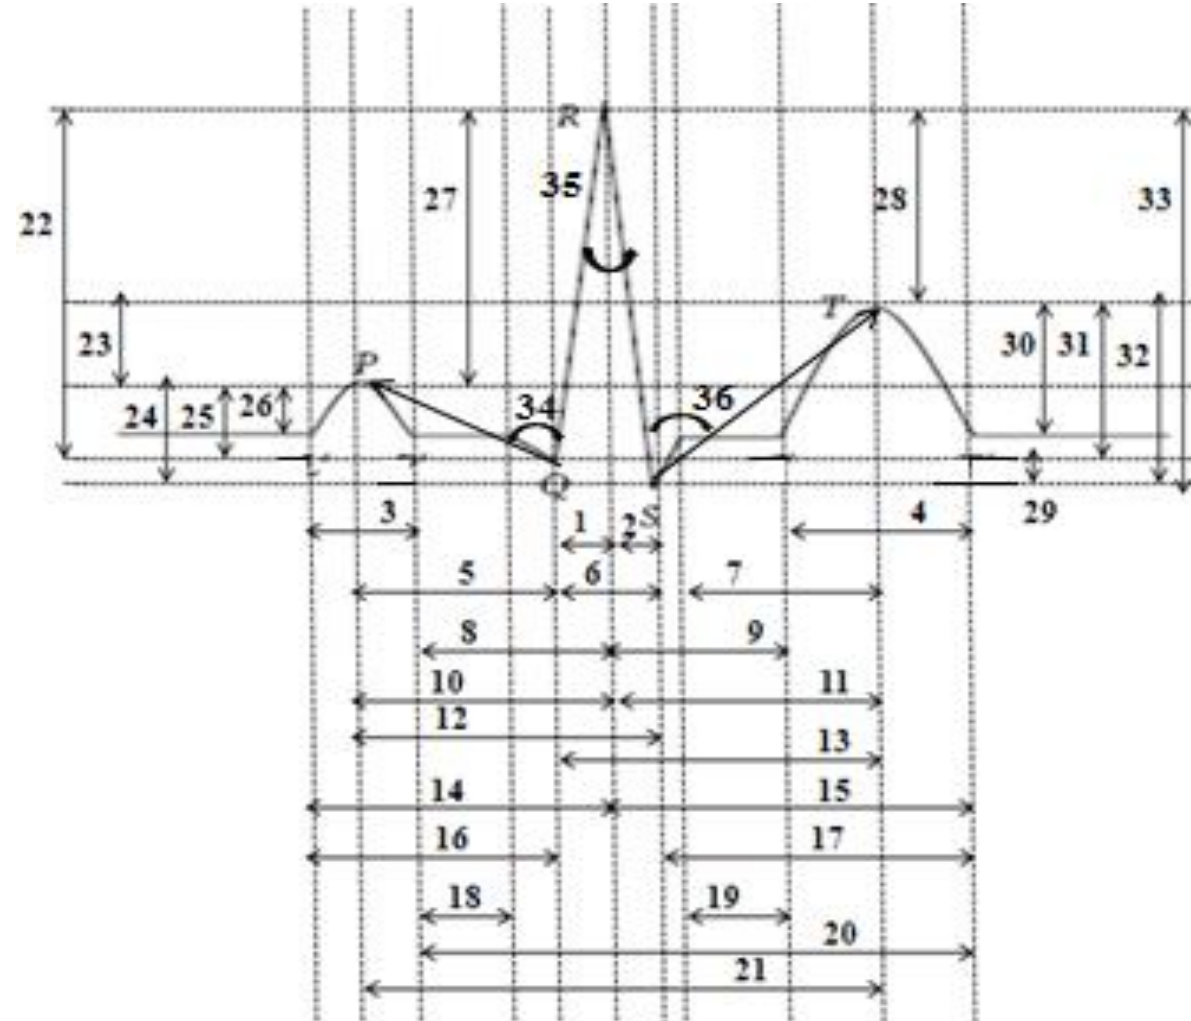



Feature Extraction

- These features utterly depend on accurate detection of fiducial points. However, this is a very challenging task since these points are susceptible to noise, Moreover, there is no standards to tell us where these points exactly exit, even cardiologists will give different marker position for same point.
- These reasons encourage the researchers recently to utilize non-fiducial feature extraction methods (ex: Wavelet, AC\DCT ..etc) where only R peak detection is needed and sometimes without fiducial points detection at all.
- Non-Fiducial features represent holistic patterns in ECG signals, instead of amplitude and duration between fiducial points.



ECG Segmentation for non-Fiducial Features

Heartbeat Segmentation

- Each ECG trace (record) is segmented into ECG heartbeats. Each heartbeat must encompass the three complex waves P, QRS and T. In the literature, due to the difficulty in detecting the beginning and the end of each heartbeat, a fixed segmentation has been considered by taking a definite number of samples before and after each R peak. However, this strategy ignores the effect of heart rate changes.
- As the heart rate increases (decreases), the one segment may include more (less) than one heartbeat which by its role, may violate the later extracted features. Thus, dynamic segmentation is suggested where the number of samples considered before and after each R peak is counted according to the duration between the current R peak and the previous R (RR previous) and the duration between the current R peak and the next R (RR next). The RR interval is usually considered as heartbeat duration since it includes all three complex waves. Thus, when the heart rate increases (decreases), correspondingly the RR duration decreases (increases).


$$\begin{aligned} \text{Before } R_{\text{peak}} &= \frac{1}{3} * \frac{RR_{\text{previous}} + RR_{\text{next}}}{2} \\ \text{After } R_{\text{peak}} &= \frac{2}{3} * \frac{RR_{\text{previous}} + RR_{\text{next}}}{2} \end{aligned}$$




ECG Segmentation for non-Fiducial Features

ECG Segments


- ECG can be segmented into RR intervals; each RR interval can be considered as one beat since it includes the three waves. RR intervals are used in biometrics applications.
- ECG records are partitioned into ECG segments, where each segment can include more than one beat but not less than one beat.

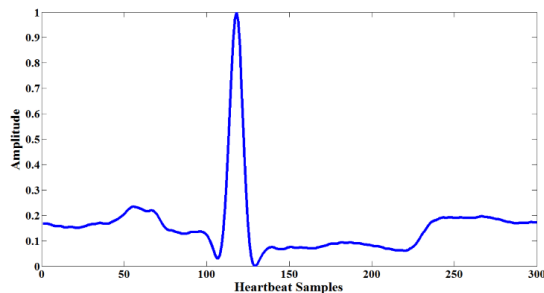

Single heartbeat

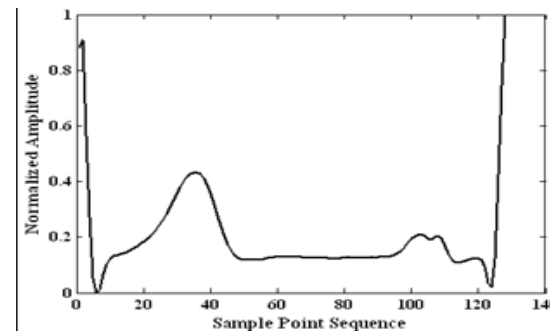

RR interval

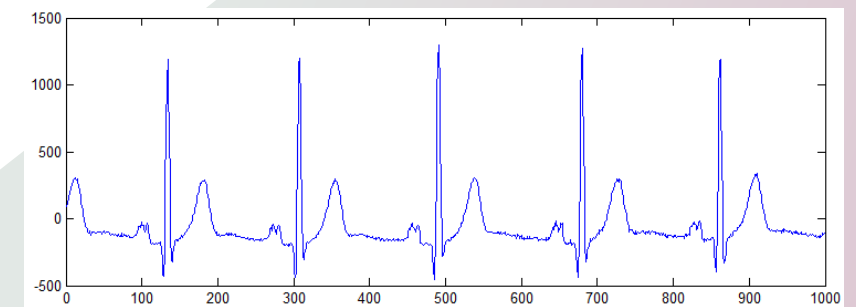

ECG segment



Non-Fiducial Features ***Wavelets***




- Decompose the ECG segments\heartbeats in suitable number of levels using mother wavelets that suits in shape the ECG waves (ex: Daubechies family). Thereafter, preserve only the coefficients of ECG band (1-40) and utilize them as features.



Non-Fiducial Features

AC\DCT


Apply Autocorrelation (AC) to ECG segments and then apply DCT to reduce the dimension.

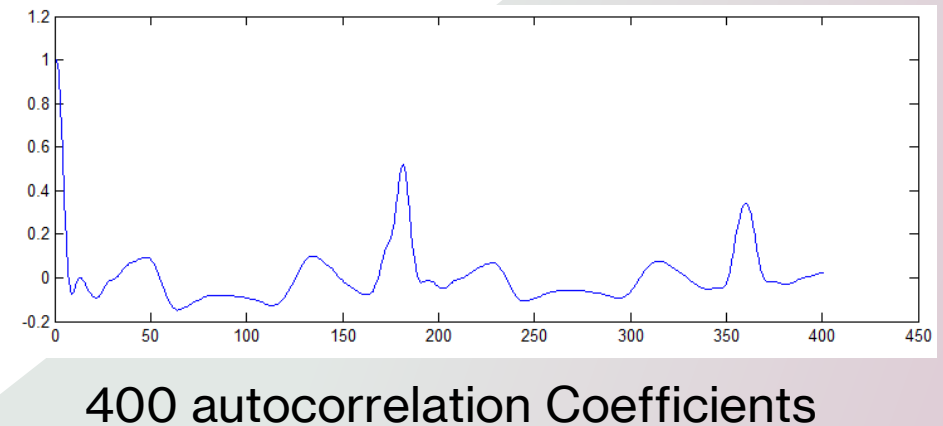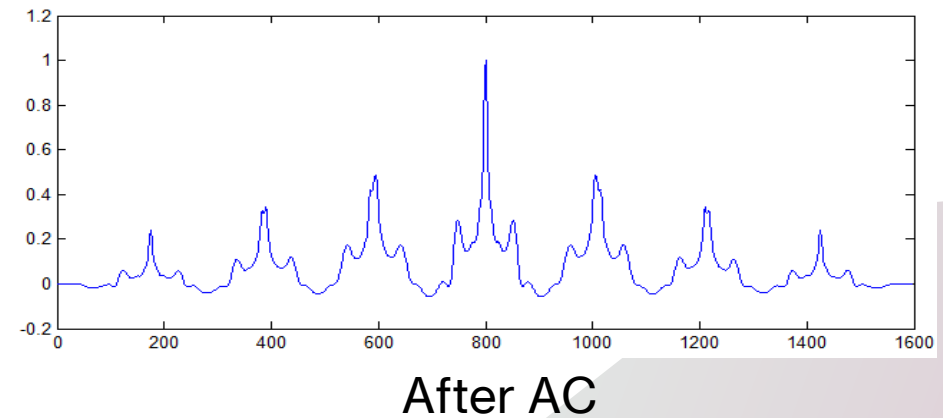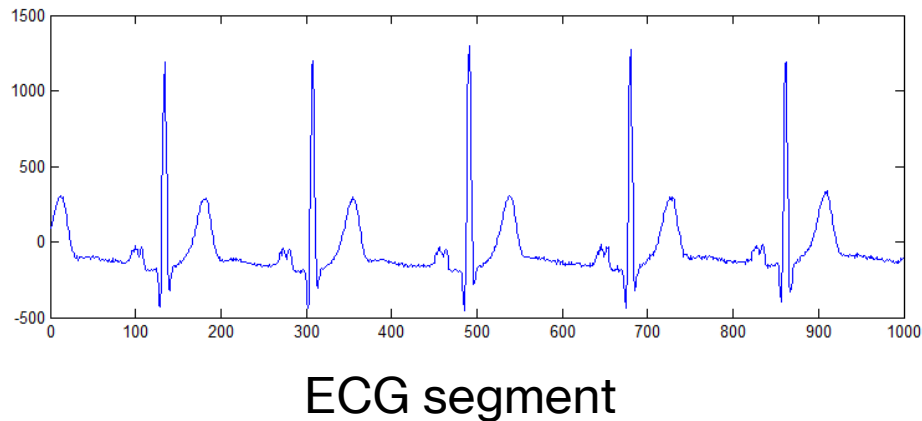




Non-Fiducial Features


AC\DCT

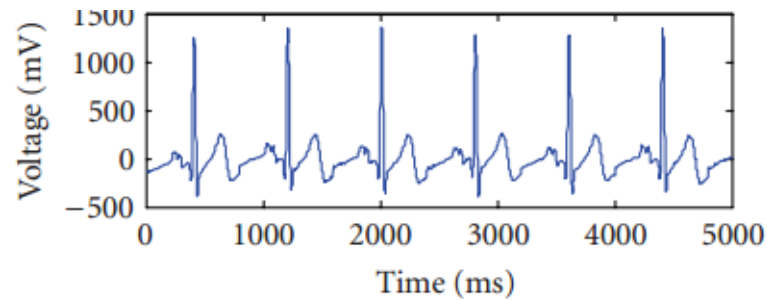


(a) 5 seconds of ECG from subject A

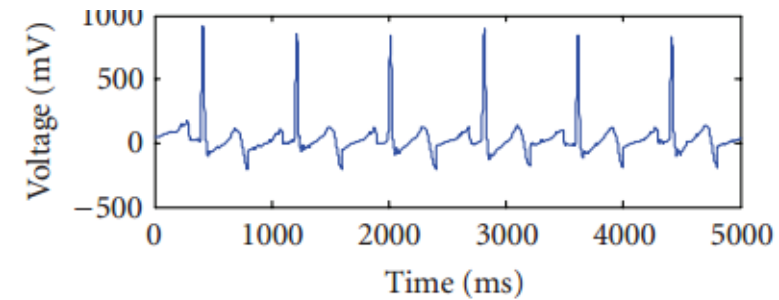



(b) 5 seconds of ECG from subject B

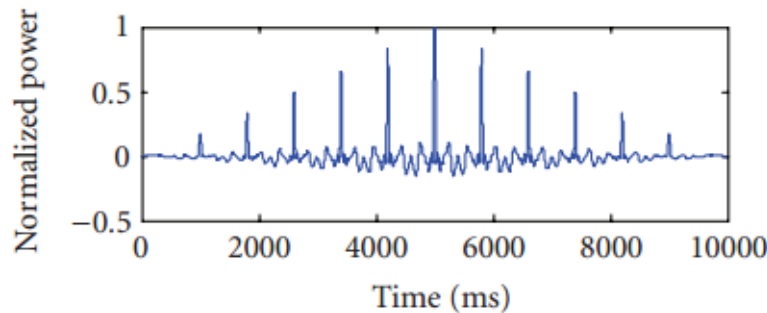

(c) AC of A

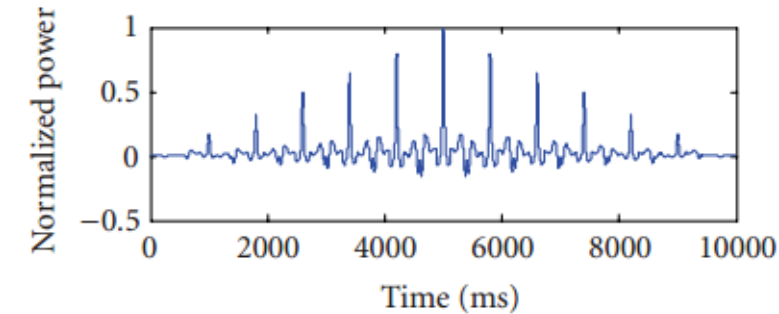

(d) AC of B

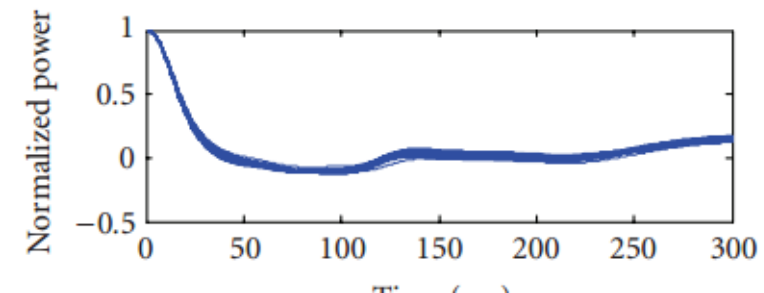
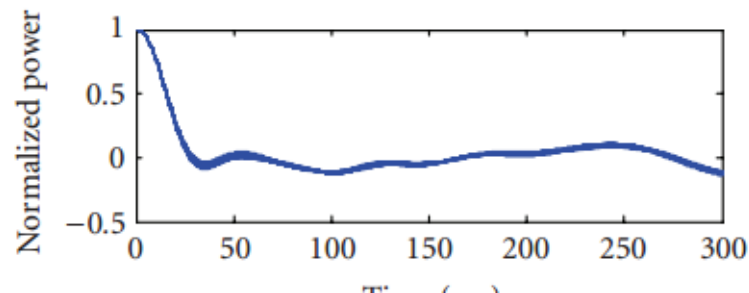






Non-Fiducial Features

AC\DCT

AC Coefficients

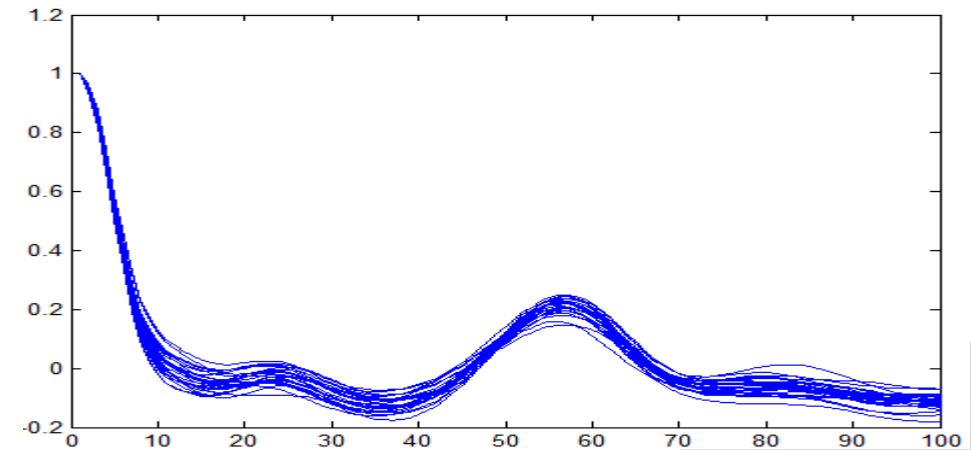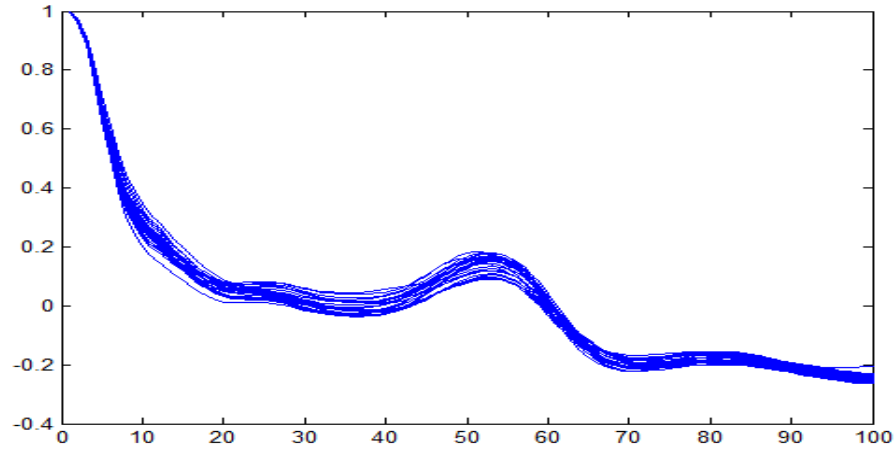

After DCT

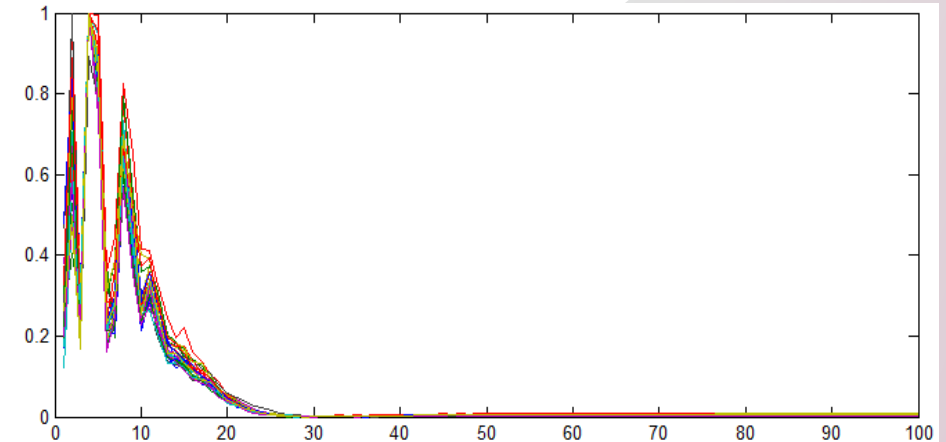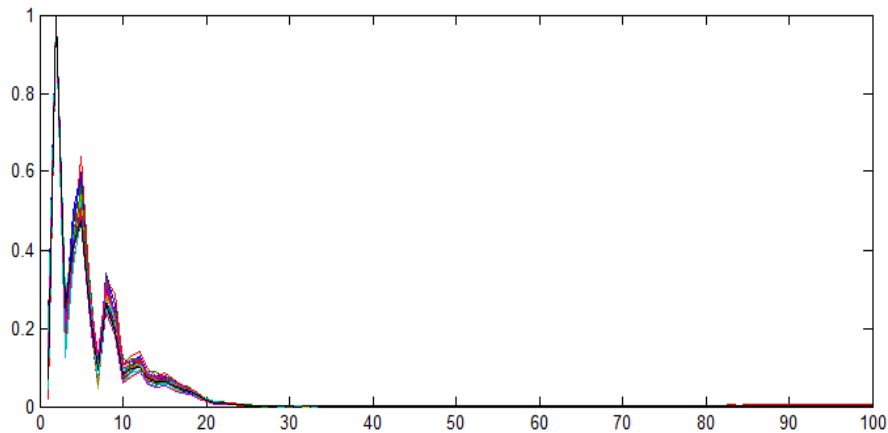



Classification

- Linear Discriminate Analysis
- Support Vector Machines (SVM)
- Artificial Neural Networks
- Deep Learning (input is usually ECG segments or ECG heartbeats, few studies convert each ECG segment 1 D to 2D to get benefit of 2D CNN existing architectures)



Multimodal biometric systems




Why Multimodal Biometrics ?

1. Noisy biometric data
 - Illness affecting voice
 - Scar affecting fingerprint
2. Non-universality
 - Worn out fingerprints
 - Multi-biometric systems reduce failure to enroll rate (increase population coverage)
3. Intra-class variations: These variations are typically caused by a user who is incorrectly interacting with the sensor.
4. Achieving higher accuracy than using a single biometric
5. Spoof attacks
 - More difficult to spoof a multi biometric system

What is Multimodal Biometrics ?



Level of Fusion

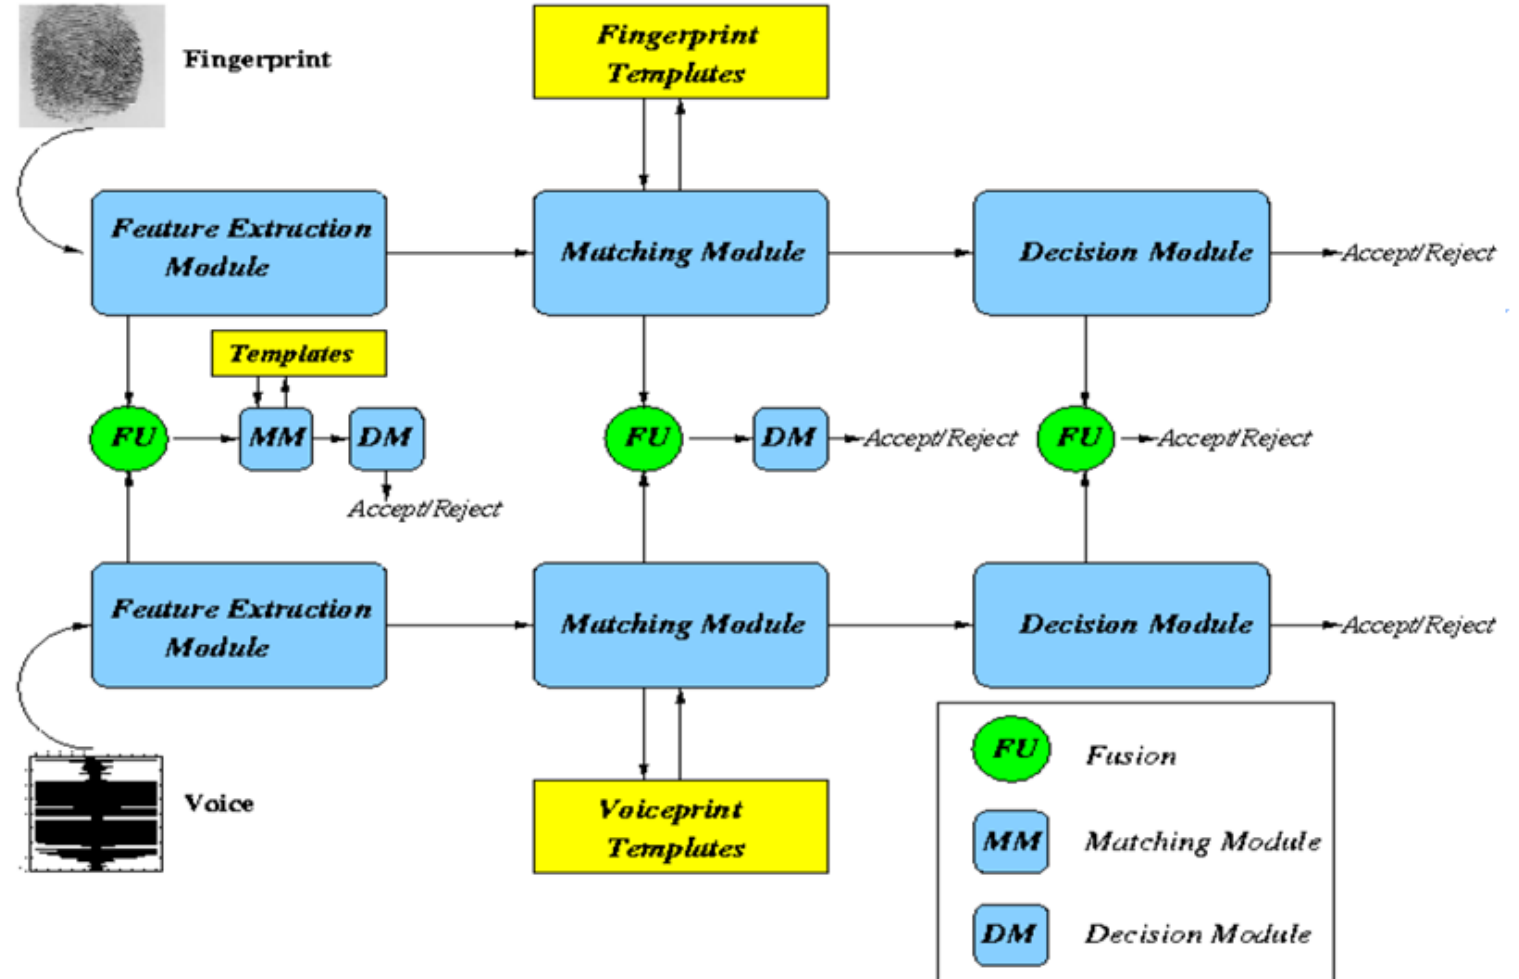

Ross, Jain, "Information Fusion in Biometrics", Pattern Recognition Letters, September 2003.

Level of Fusion

- ❖ Fusion at the data or feature level: Either the data itself or the feature sets originating from multiple sensors/sources are fused.
- ❖ Fusion at the match score level: The scores generated by multiple classifiers pertaining to different modalities are combined.
- ❖ Fusion at the decision level: The final output of multiple classifiers are consolidated via techniques such as majority voting.

Continue...

- Biometric systems that integrate information at an early stage of processing are believed to be more effective than those systems which perform integration at a later stage.
- Thus, fusion at the feature level is expected to provide better recognition results. However, fusion at this level is difficult to achieve in practice because the feature sets of the various modalities may not be compatible
- Fusion at the decision level is rigid due to the availability of limited information. Thus, fusion at the match score level is usually preferred, as it is relatively easy to access and combine the scores presented by the different modalities.

Integration Strategies

- Fusion at the feature level can be accomplished by concatenating two compatible feature sets. Feature selection/reduction techniques may be employed to handle the curse-of dimensionality problem.
- Fusion at the match score level has been after robust and efficient normalization which is necessary to transform the scores of multiple matchers into a common domain prior to consolidating them. In the context of verification, two distinct strategies exist for fusion at this level.

Continue...

- first approach the fusion is viewed as a classification problem where a feature vector is constructed using the matching scores output by the individual matchers; this feature vector is then classified into one of two classes: Accept (genuine user) or Reject (impostor) .
- Second approach the fusion is viewed as a combination problem where the individual matching scores are combined to generate a single scalar score which is then used to make the final decision.
- Fusion strategies at the decision level include majority voting, behavior knowledge space method, weighted voting, AND/OR rules, etc.

Modes of Operation

- A multimodal system can operate in one of three different modes:
 - *Serial mode*
 - the output of one modality is typically used to narrow down the number of possible identities before the next modality is used.
 - multiple sources of information (e.g., multiple traits) do *not* have to be acquired simultaneously. Further, a decision could be made before acquiring *all the traits*. This can reduce the overall recognition time.
 - *Parallel mode*
 - the information from multiple modalities are used simultaneously in order to perform recognition.
 - *Hierarchical mode*
 - individual classifiers are combined in a treelike structure. This mode is relevant when the number of classifiers is large.

Example For multimodal biometric login system



Challenges in designing Multimodal Biometric System

- The choice and number of biometric traits.
- The level in the biometric system at which information provided by multiple traits should be integrated.
- The methodology adopted to integrate the information.
- The computation, cost and acceptability versus matching performance trade off.




Multimodal System based on both ECG & Fingerprint traits

- Fingerprint based systems are the most used unimodal biometric systems. However, they are vulnerable to presentation attacks or spoofing when a fake fingerprint is presented to the sensor. Moreover, they need further processing for liveness check.
- Hence, heartprint (ECG heart beats) is suggested to combine with fingerprint to construct a multimodal system that combine the best of the two worlds: the stability and high accuracy of fingerprint and the difficulty of falsification of ECG and its ability to be a liveness indicator without any further processing. Moreover, this multimodal system will have high user acceptability, especially, if both traits are captured from thumbs.
- Due to the lack of a multimodal dataset that combines fingerprints and heartprints (ECG heartbeats), researchers usually combine fingerprint and heartprint datasets to construct a multimodal dataset by randomly associated each person from the fingerprint dataset to a person from the heartprint dataset.
- Recently, multimodal system that combines heartprint and fingerprint usually has one of two architectures.



Multimodal System based on both ECG & Fingerprint traits


➤ ***First Architecture (Feature Fusion) using deep learning***

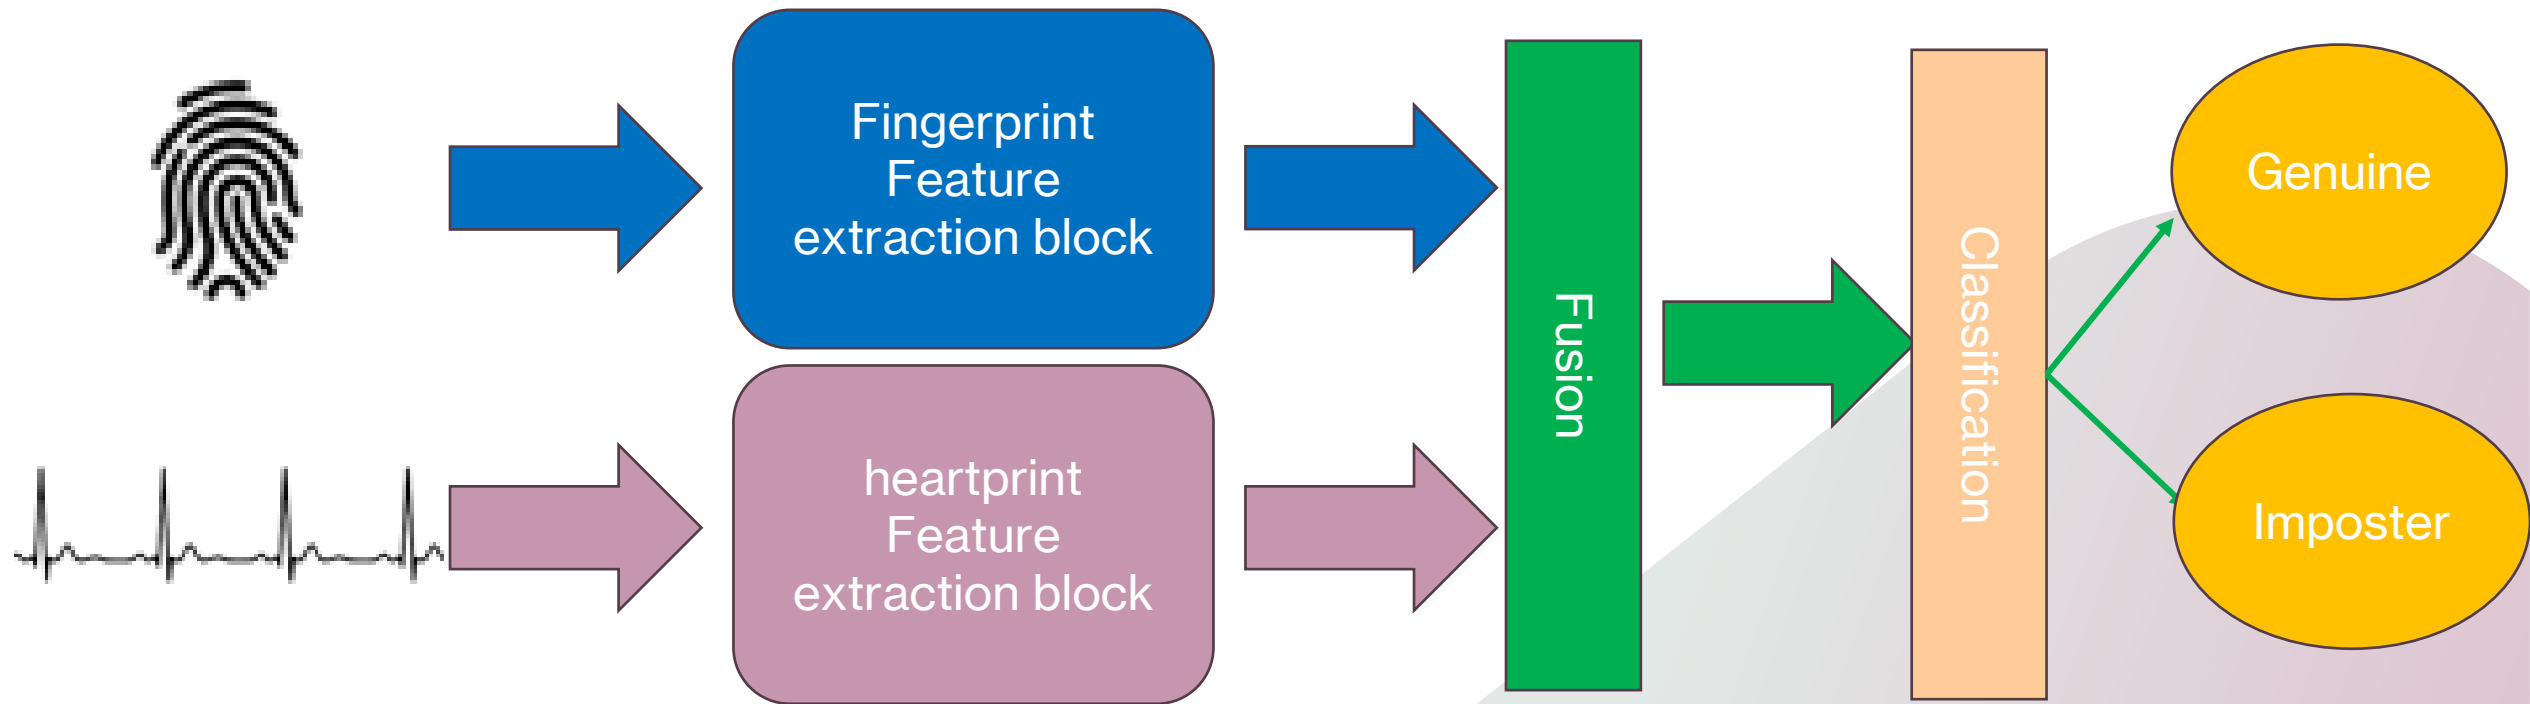



Multimodal System based on both ECG & Fingerprint traits

➤ Second Architecture (Score Fusion)

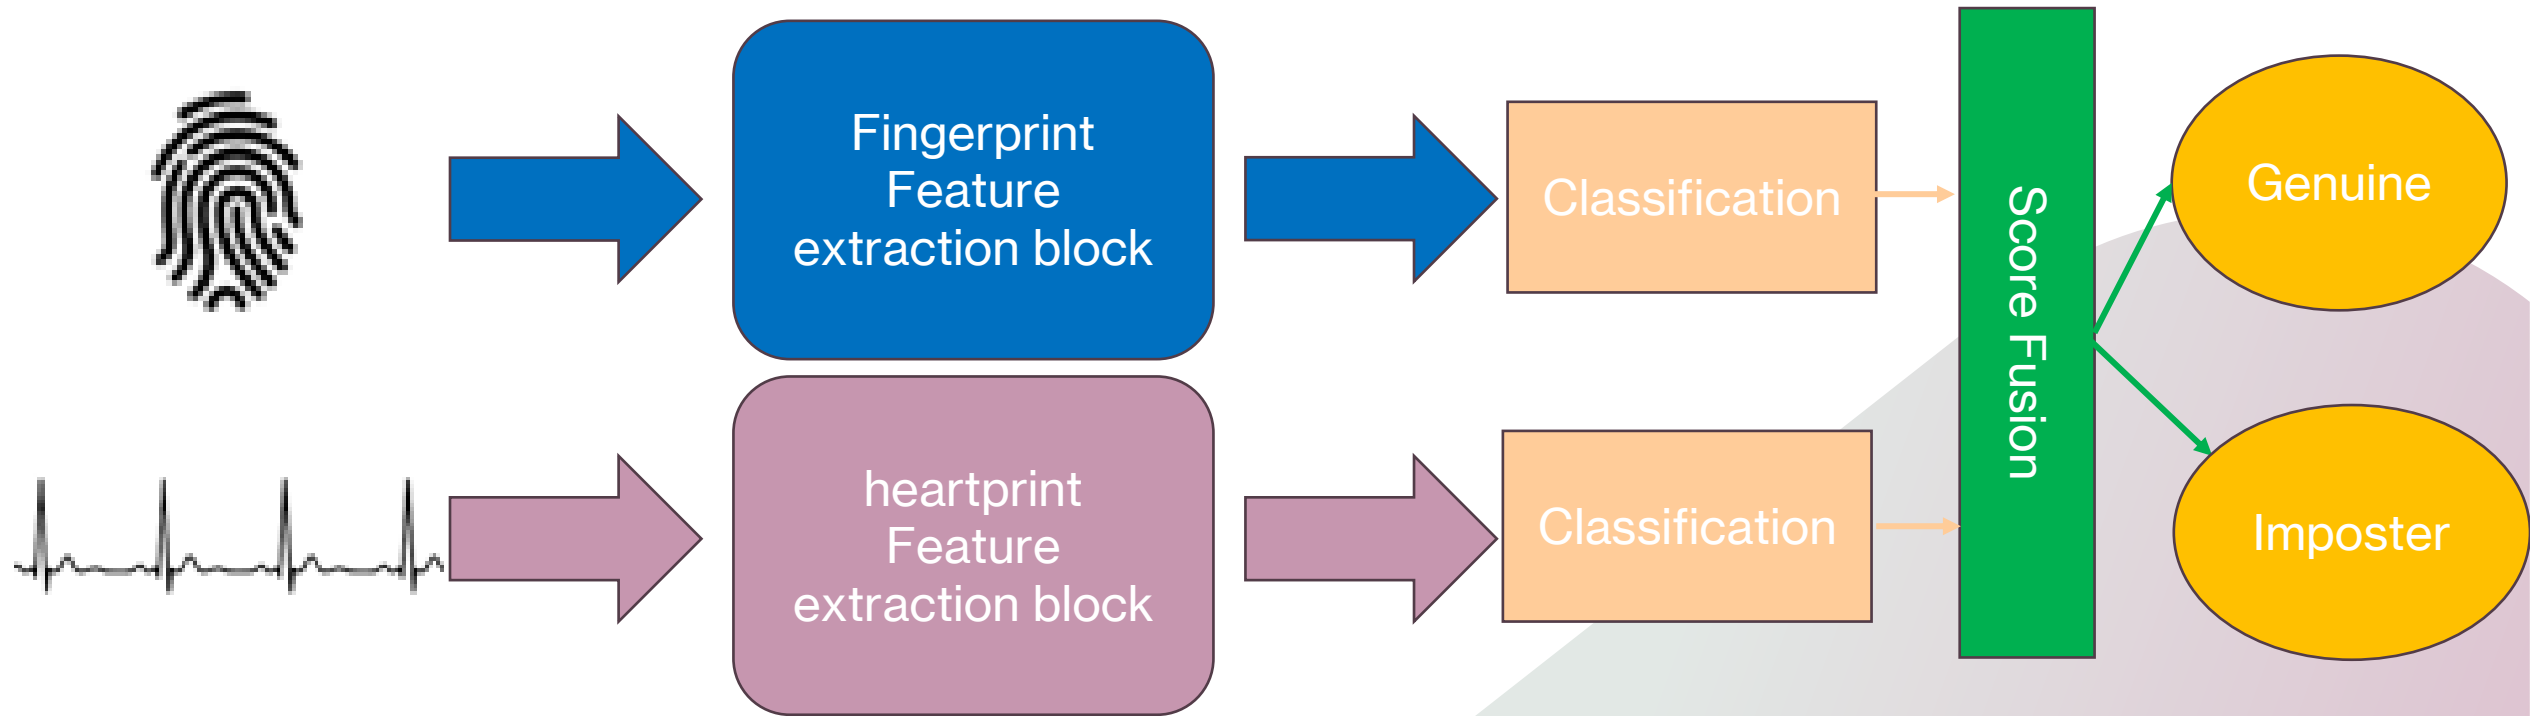



Challenges and state of art directions

- Prove the applicability of ECG biometric recognition on a largescale population (most studies utilize few tens of subjects).
- Achieving needed stability of time.
- Improve models that are robust enough to overcome intra-subject variability (noise, healthy conditions and emotions).
- Efforts are exerted to improve performance while using a single-lead ECG (or placing the thumb on the device's conducting plate) gathered with minimal intrusiveness, as it is a much more user-friendly approach.
- Construct true multimodal datasets (fingerprints and heartprints) to help in improving the performance of heartprint & fingerprint-based systems for their robustness and user acceptability.

Thank you