


REFERENCE — VERIFY BEFORE WIRING

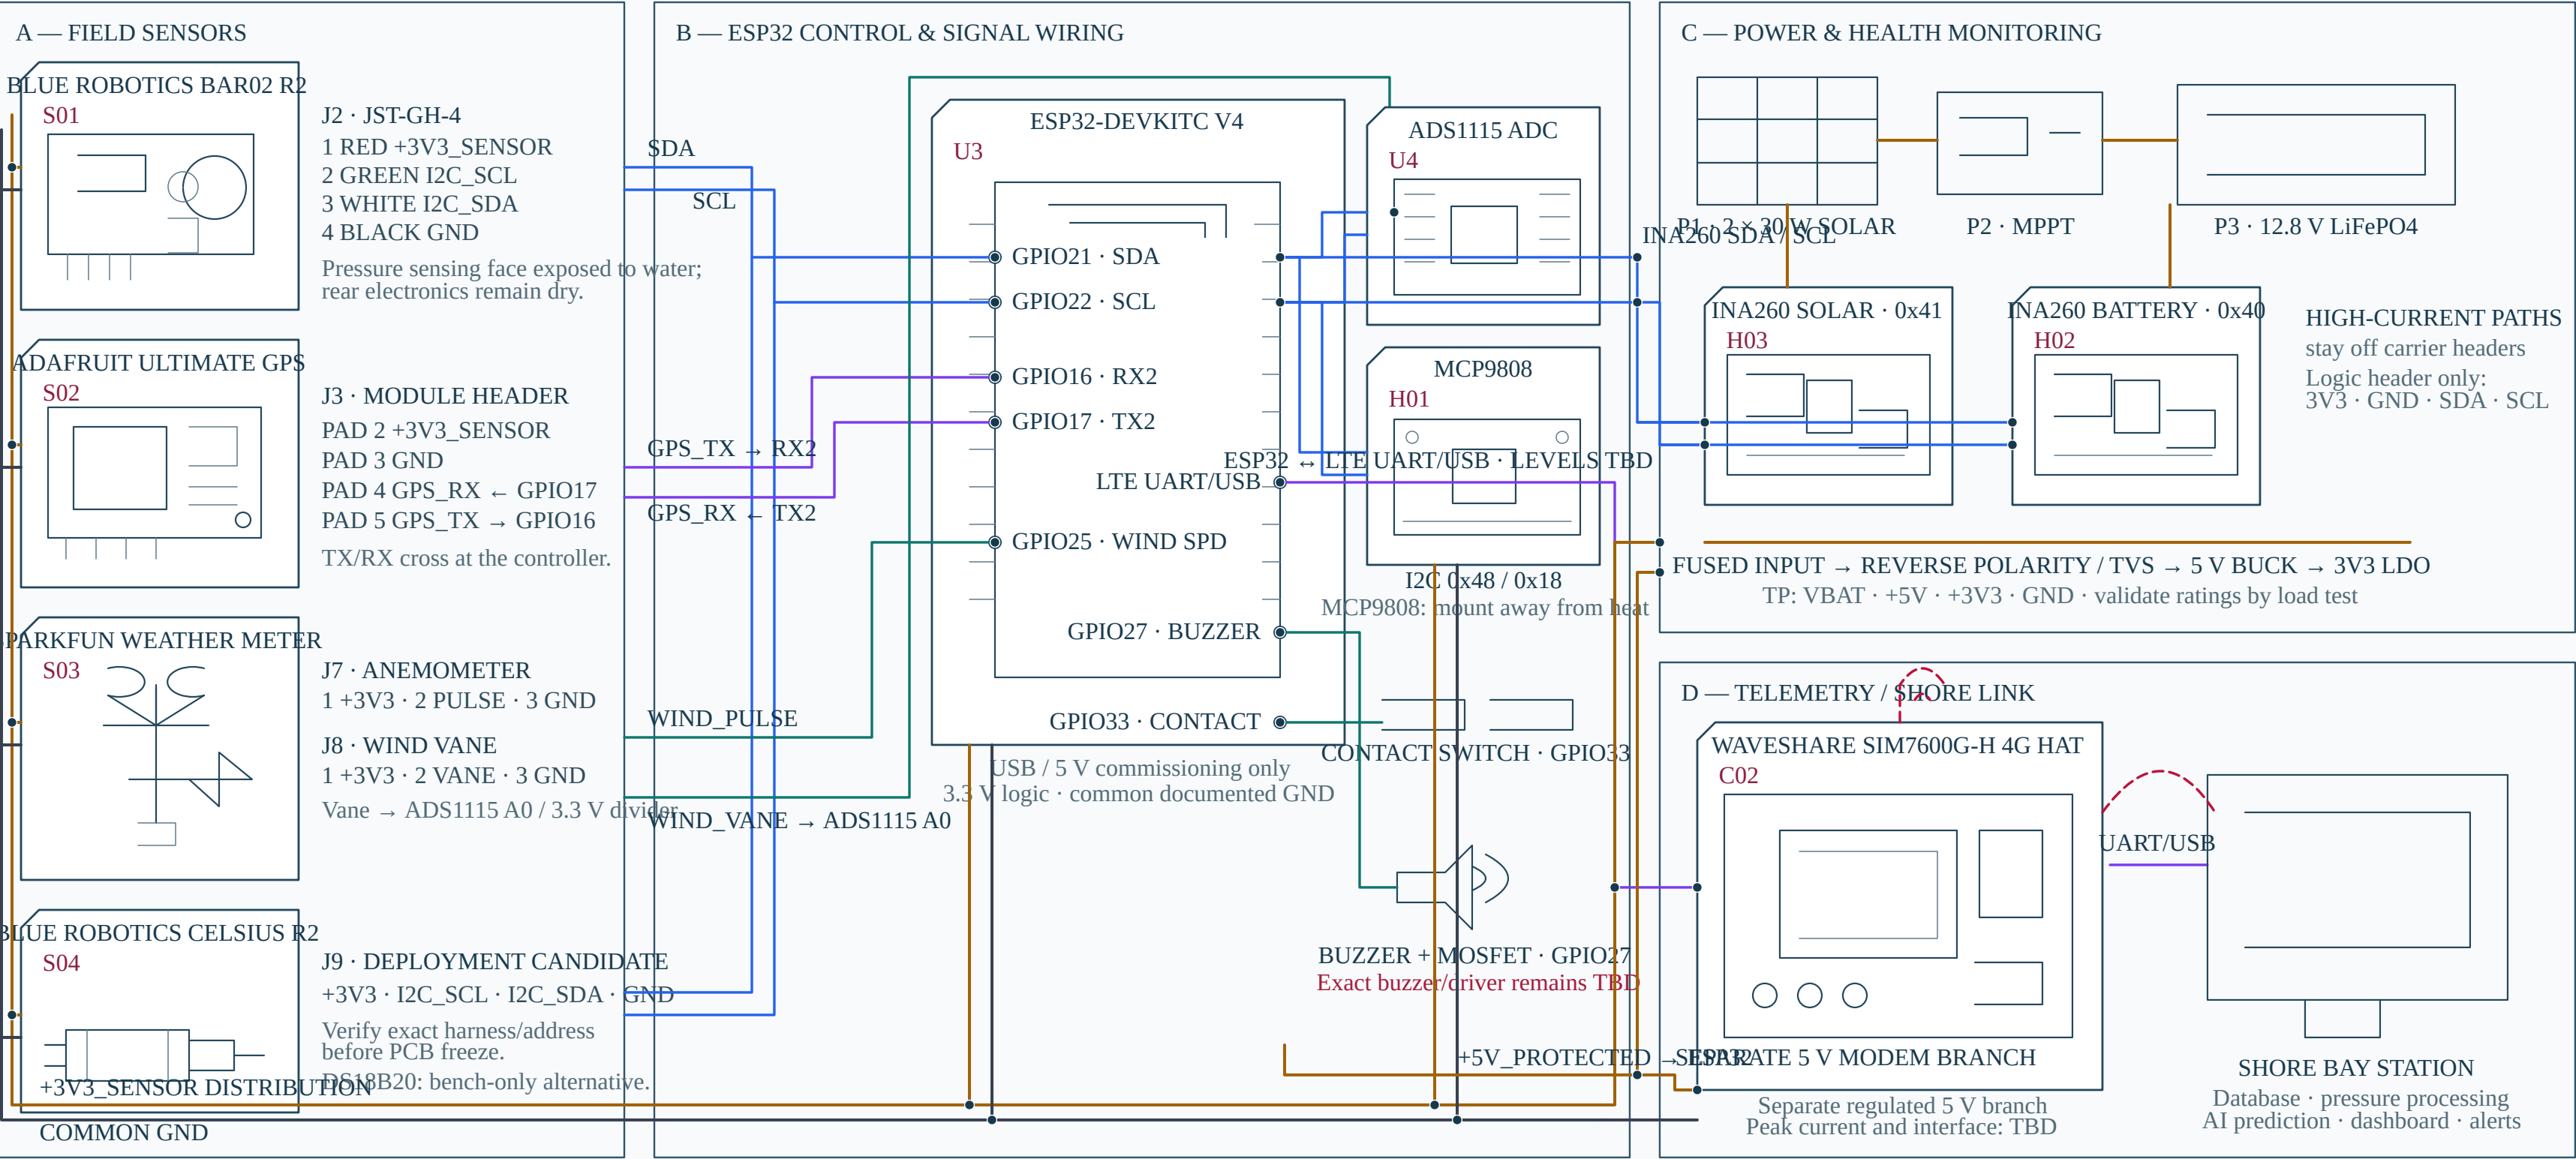

E — CONTROLLED CONNECTOR SUMMARY / DRAWING NOTES

J2 BAR02	3V3 · SCL · SDA · GND	J6 MCP9808	3V3 · SCL · SDA · GND	J9 CELSIUS	Final I2C harness/address: VERIFY
J3 GPS	3V3 · GND · GPS_RX · GPS_TX	J7 ANEMOMETER	3V3 · WIND_PULSE · GND	LTE LINK	UART/USB and voltage levels: NOT FROZEN
J4/J5 INA260	3V3 · GND · SCL · SDA (logic only)	J8 WIND VANE	3V3 · WIND_VANE · GND	SERVICE	USB/UART for bench commissioning only

POWER I2C UART/USB GPIO/ANALOG CELLULAR

NOTES: 1) Pin numbers are provisional until exact purchased modules and connector orientations are verified. 2) Disconnect USB, battery and solar before rewiring. 3) No BNO085 or Orange Pi is part of the Phase 1 buoy harness. 4) KiCad schematic and verified harness register control fabrication—not this illustrated reference.

DRAWING FALCON-BP-007 REV P0
STATUS REFERENCE / NOT FOR FABRICATION DATE 2026-09-01