

BHAVANI[®]

BHAVANI CRANE & LIFTING EQUIPMENTS
SINCE : 1996



Industrial **CRANE CONTROL** &
LIFTING Equipments



CE

AN ISO

9001:2015

Certified Company

Company Profile

Bhavani Crane & Lifting Equipments is a very well equipped manufacturer of Material Handling Equipments, Crane Control Equipments & Lifting Equipments. We have developed our roots in this field from more than last two decades. We established a proud reputation in the market place, as a quality conscious supplier of customer specific products.

Bhavani Crane & Lifting Equipments is an expert in manufacturing High Quality Electric Crane Components & Lifting Products. Our purpose is to ensure customer satisfaction through development, manufacturing & delivering Quality products which are Durable & technologically advanced. To Supply innovative products of consistent Quality through continual improvements in our Quality Management system for Customer satisfaction.

We aspire to become one of the most reputed suppliers without negotiating over quality of our products and services with great determination we maintain high standards of integrity in building long-term mutually beneficial relationships with our working partners inside and outside our industry.

Vision



Power Plant



Chemical Industry



Paper Industry



Ports



Crane Industry



Heavy Engineering & Machine Tools Industry

Electric Crane Small Cable Carrier Suitable For 06 – 08 MM Wire Rope



Model No : BE-01

Cable Clamping
Sq. 7-14 MM



Model No : BE-01-N

Cable Clamping
Dia. 7-14 MM



Model No : BE-02

Cable Clamping
Dia. 13 & 18 MM




Model No : BE-02-N

Cable Clamping
Dia. 16-20 MM



Model No : BE-02-A

Cable Clamping
Dia. 14, 16, 14 & 10 MM



Model No : BE-03

Cable Clamping
8 X 34 MM



Model No : BE-04

Cable Clamping
Width 55 MM



Model No : BE-05

Cable Clamping
Dia. 22 MM



Model No : BE-06

Cable Clamping
Dia. 32 MM



Model No : BE-07

Cable Clamping
Dia. 11 to 16 MM

Electric Crane Big Cable Carrier Suitable For 10 – 12 MM Wire Rope



Model No : BE-08

Cable Clamping
Sq. 7-14 MM



Model No : BE-08-N

Cable Clamping
Dia. 7-14 MM



Model No : BE-09

Cable Clamping
Dia. 13 & 18 MM



Model No : BE-09-N

Cable Clamping
Dia. 16-20 MM



Model No : BE-09-A

Cable Clamping
Dia. 14, 16, 14 & 10 MM



Model No : BE-10

Cable Clamping
8 X 34 MM



Model No : BE-11

Cable Clamping
Width 55 MM



Model No : BE-12

Cable Clamping
Dia. 22 MM



Model No : BE-13

Cable Clamping
Dia. 32 MM



Model No : BE-14

Cable Clamping
Dia. 11 to 16 MM



Model No : BE-14-A

Cable Clamping
Dia. 40 MM

Electric Crane Cable Double Wheel Cable Carrier Suitable For 06 – 08 MM Wire Rope



Model No : BE-37

Cable Clamping
Sq. 7-14 MM



Model No : BE-37-N

Cable Clamping
Dia. 7-14 MM



Model No : BE-38

Cable Clamping
Dia. 13 & 18 MM



Model No : BE-38-N

Cable Clamping
Dia. 16-20 MM



Model No : BE-38-A

Cable Clamping
Dia. 14, 16, 14 & 10 MM



Model No : BE-39

Cable Clamping
8 X 34 MM



Model No : BE-40

Cable Clamping
Width 55 MM



Model No : BE-41

Cable Clamping
Dia. 22 MM



Model No : BE-42

Cable Clamping
Dia. 32 MM



Model No : BE-43

Cable Clamping
Dia. 11 to 16 MM



Model No : BE-43-A

Cable Clamping
Dia. 40 MM

Electric Crane Metal Cable Carrier



Model No : BE-34

- Wire Rope Dia. 6 To 8 mm
- Metal Hook Dia. 20 mm



Model No : BE-34-A

- Wire Rope Dia. 8 to 10 mm
- Metal Hook Dia. 20 mm



Model No : BE-34-B

- Wire Rope Dia. 3 to 6 mm
- Metal Hook Dia. 20 mm



Model No : BE-36

- Wire Rope Dia. 8 to 12 mm
- Cable Clamping Width 40 mm
- Wheel : Plastic




Model No : BE-36-A

- Wire Rope Dia. 8 to 12 mm
- Cable Clamping Width 40 mm
- Wheel : Plastic



Model No : BE-36-B

- Wire Rope Dia. 8 to 12 mm
- Cable Clamping Width 40 mm
- Wheel : Metal

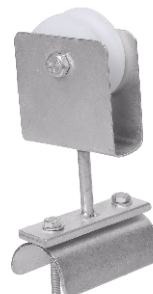

Model No : BE-36-C

- Wire Rope Dia. 8 to 12 mm
- Cable Clamping Width 60 mm
- Wheel: Nylon with 2 Bearing



Model No : BE-44

- Wire Rope Dia. 6 to 8 mm
- Cable Clamping Width 32 mm
- Wheel : Metal




Model No : BE-45

- Wire Rope Dia. 6 to 8 mm
- Cable Clamping Width 32 mm
- Wheel : Plastic



Model No : BE-46

- Wire Rope Dia. 6 to 8 mm
- Cable Clamping Dia. 13 & 18 mm
- Wheel : Metal

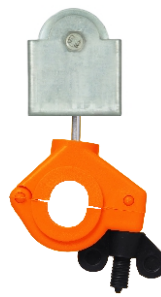

Model No : BE-47

- Wire Rope Dia. 6 to 8 mm
- Cable Clamping Width 22/32 mm
- Wheel: Metal



Model No : BE-48


- Wire Rope Dia. 25 mm
- Cable Clamping Width 22/32 mm
- Wheel : Plastic

Electric Crane 2 Bearing Metal Trolley Suitable For 50 mm T-Channel




Model No : BE-15

Cable Clamping
Sq. 7-14 MM

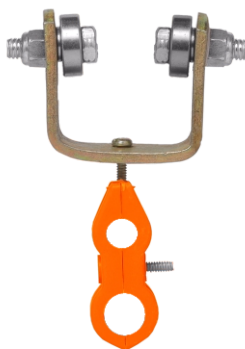


Model No : BE-16

Cable Clamping
Dia. 13 to 18 MM




Model No : BE-17

Cable Clamping
8 X 34 MM

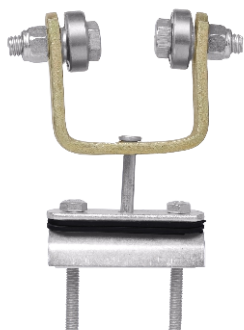


Model No : BE-18

Cable Clamping
Width 40 MM

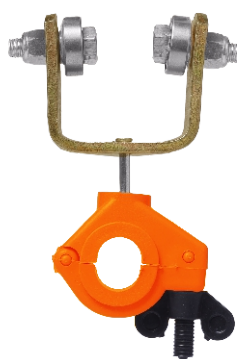

Model No : BE-19

Cable Clamping
Dia. 22 MM

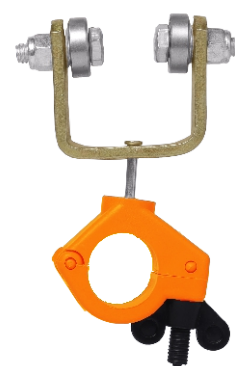

Model No : BE-20

Cable Clamping
Dia. 32 MM



Model No : BE-21

Cable Clamping
Dia. 11 to 16 MM



Model No : BE-28-A


Cable Clamping
Width 80 MM



Model No : BE-53


Cable Clamping
Width 80 MM

Electric Crane I-BEAM Metal Trolley

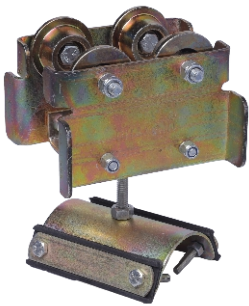


Model No : BE-22

- Cable Calmping Width 80 mm.
- Suitable for 50 to 75 mm I-Beam
- Body Material : Mild Steel
- Wheel : Metal

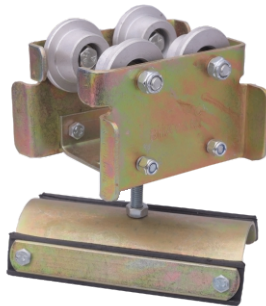


Model No : BE-23

- Cable Calmping Width 125 mm.
- Suitable for 50 to 75 mm I-Beam
- Body Material : Mild Steel
- Wheel : Aluminium

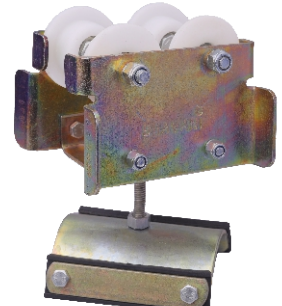

Model No : BE-24

- Cable Calmping Width 80 mm.
- Suitable for 50 to 75 mm I-Beam
- Body Material : Mild Steel
- Wheel : Nylon Material

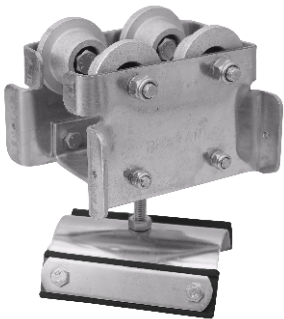


Model No : BE-25

- Cable Calmping Width 80 mm.
- Suitable for 50 mm I-Beam
- Body Material : Stainless Steel
- Wheel : Aluminium




Model No : BE-26

- Cable Calmping Width 80 mm.
- Suitable for 50 mm I-Beam
- Body Material : Mild Steel
- Wheel : Plastic

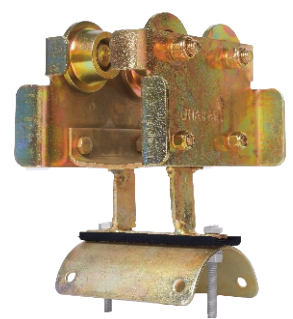


Model No : BE-27

- Cable Calmping Width 80 mm.
- Suitable for 50 mm I-Beam
- Body Material : Mild Steel
- Wheel : Nylon/Metal

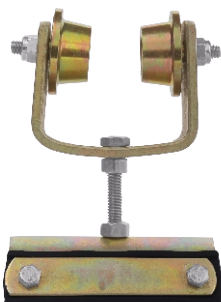


Model No : BE-28

- Cable Calmping Width 80 mm.
- Suitable for 50 mm, I-Beam/ T-Channel.
- Body Material : Mild Steel
- Wheel : Metal/Nylon Material

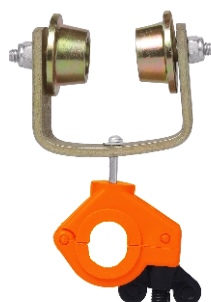

Model No : BE-29

- Cable Calmping Dia. 22/32 mm
- Suitable For 50 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal/Nylon Material

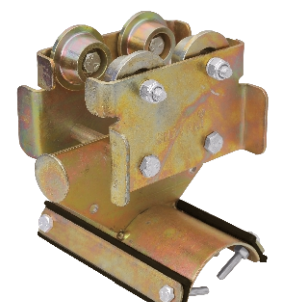

Model No : BE-30


- Multiple Cable Calmping
- Cable Clamping Width 125 mm.
- Suitable For 50 mm to 200 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal/Nylon

Electric Crane I-BEAM Metal Trolley



Model No : BE-30-A

- Cable Clamping Width 120 mm.
- Suitable For 50 to 200 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal/Nylon

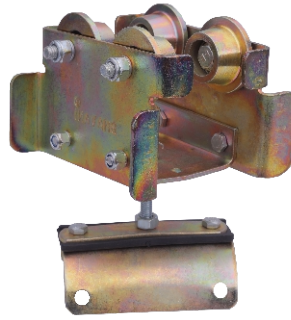

Model No : BE-31

- Cable Clamping Width 80 mm.
- Suitable For 50 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal/Nylon Material



Model No : BE-33

- Cable Clamping Width 80 & 120 mm.
- Suitable For 50, 75 & 100 mm I-Beam.
- Body Material : Unbreakable Plastic Body
- Wheel : Nylon Material

Electric Crane Heavy Duty I-Beam Metal Trolleys




Model No : BE-32

- Cable Clamping Width 160 mm.
- Suitable For 75 to 200 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal/Nylon Material




Model No : BE-32-A

- Cable Clamping Width 125 mm.
- Suitable For 75 mm to 200 I-Beam.
- Body Material : Mild Steel
- Wheel : Metal

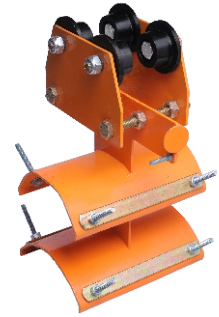


Model No : BE-32-B

- Cable Clamping Width 160 mm.
- Suitable For 75 & 200 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal

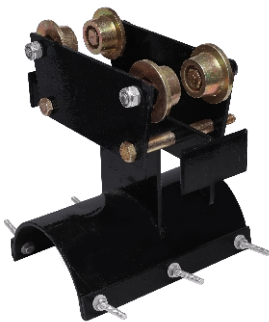

Model No : BE-32-C

- Cable Clamping Width 210 mm.
- Suitable For 75 to 150 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal

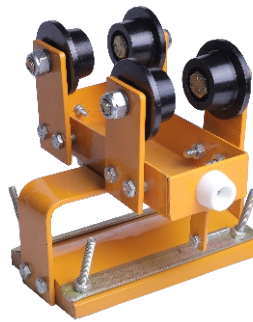

Model No : BE-35

- Cable Clamping Width 150 mm.
- Suitable For 50 to 100 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal



Model No : BE-35-A

- Cable Clamping Width 150 mm.
- Suitable For 50 & 100 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal

C-Rail Festoon System


Bhavani Crane & Lifting equipment's C-rail Festoon Systems are the ideal solution for carrying cables or Hoses to supply power to overhead cranes or any other moving Machinery. C-rail Festoon Systems are generally used for providing power and control to a hoist system. The main applications of this system is for mobile power consumer like crane, monorail, electric hoist, Special Purpose machines, plating lines.




Components




C-CHANNEL

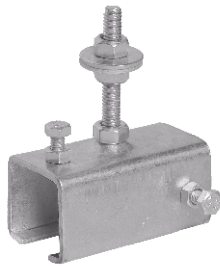


HANGER CLAMP

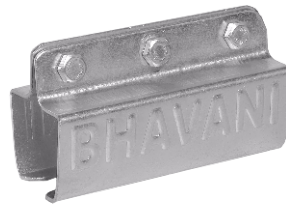


TRACK COUPLER-1

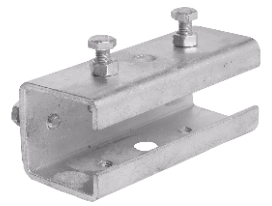


TRACK COUPLER-2



STARTING TROLLEY




END CLAMP



TRAVELLING TROLLEY



C-RAIL HEAVY CABLE TROLLEY



C-RAIL CABLE TROLLEY-1

Regular



C-RAIL CABLE TROLLEY-2

Power Coted Body



C-RAIL CABLE TROLLEY-3

Plastic Clamping




C-RAIL CABLE TROLLEY-4

Hanging Type

BOLT JOINT BUSBAR

Insulated busbars are used for power transmission. Current capacity ranges from 60 Amps to 400 Amps. Insulated busbar provide safe & economical supply of electrical power for track guided mobile machinery. The application of this system is for travelling EOT Cranes.

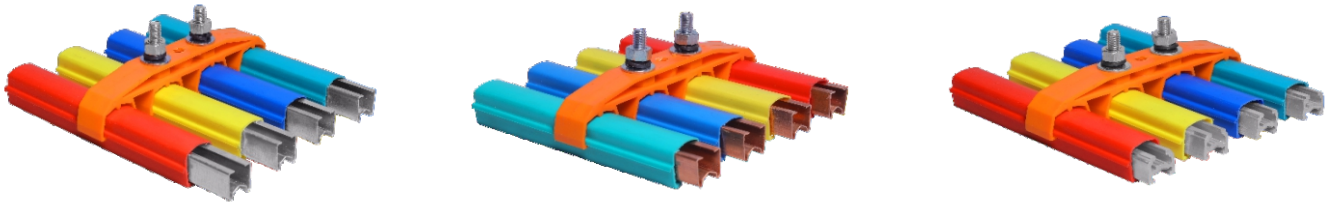

Technical Data Sheet For W type Bolt Joint Busbar

Conductor Busbar System	Galvanised Steel			Copper			Aluminium/SS	
Nominal Current (A) at 100% Duty & +35°C	60	100	125	160	250	400	200	315
Impedance (Ω/M) at +35°C	3.55	2.86	1.92	0.36	0.3	0.22	0.32	0.29
DC Resistance (Ω/M) at +35°C	3.52	2.84	1.92	0.35	0.27	0.18	0.3	0.26

Components



1 Pole Hanger Clamp



3 Pole Hanger Clamp



4 Pole Hanger Clamp




Joint Cover



125 A Current Collector



250 A Current Collector



GI Joints



Aluminium Joints



Mounting Angel



End Cap




250 A Copper shoe with holder



250 A Copper Shoe

PIN JOINT BUSBAR

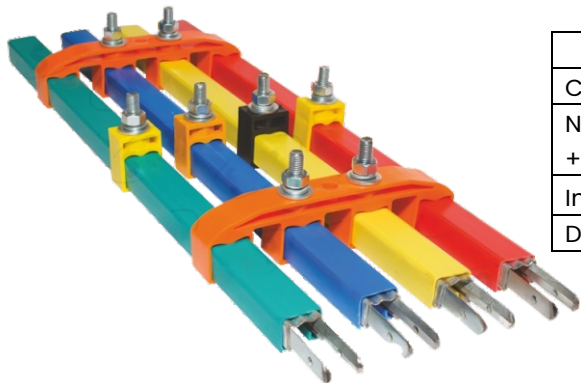

Technical Data Sheet For M type Pin Joint Busbar					
Conductor Busbar System	Galvanised Steel			Copper	
Nominal Current (A) at 100% Duty & +35°C	60	100	125	250	315
Impedance (Ω/M) at +35°C	3.6	2.9	2.5	0.345	0.335
DC Resistance (Ω/M) at +35°C	3.5	2.86	2.45	0.333	0.333

Components



1 Pole Hanger Clamp



4 Pole Hanger Clamp



Joint Cover



Copper Shoe



125 A Current Collector



125 A Copper Shoe with Cap




125 A Copper Shoe with Holder




Mounting Angle

HEAVY DUTY BUSBAR



Heavy Duty Busbar
Upto 1000 Amp

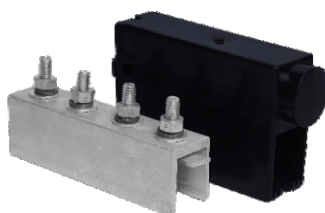

Jointer & Cover



500 Amp Collector

PUSH BUTTON STATION

ALUMINUM BODY :



Model No : PBA-01

2 Push Buttons



Model No : PBA-02

4 Push Buttons



Model No : PBA-03

6 Push Buttons



Model No : PBA-04

8 Push Buttons

PLASTIC BODY :



Model No : COB-61

2 Push Buttons



Model No : COB-62

4 Push Buttons



Model No : COB-63

6 Push Buttons



Model No : PBA-64

8 Push Buttons

UNBREAKABLE, WEATHER PROOF PUSH BUTTON :



Model No : XAC-A2713

2+1 Push Buttons



Model No : XAC-A4713

4+1 Push Buttons



Model No : XAC-A6713

6+1 Push Buttons



Model No : XAC-A8713

8+1 Push Buttons

WIRELESS RADIO REMOTE CONTROL



F21-2S

Single Speed, 2 Buttons + Start/Stop

F21-2D

Single Speed, 2 Buttons + Start/Stop



F21-4S

Single Speed, 4 Buttons + Start + Emergency Stop

F21-4D

Double Speed, 4 Buttons + Start + Emergency Stop



F21-E1B

Single Speed, 6 Buttons + Start + Stop



F-24-8S

Single Speed, 8 Buttons + Start + Emergency Stop

F-24-8D

Double Speed, 8 Buttons + Start + Emergency Stop



F23-BB

Single Speed, 10 Buttons + Start + Stop



F-24-12S

Single Speed, 12 Buttons + Start + Emergency Stop

F-24-12D


Double Speed, 12 Buttons + Start + Emergency Stop

SINGLE PHASE PENDENT PUSH BUTTON




- 2 push buttons with emergency stop.
- 10 Amp Current Rating
- 220 V.A.C.

RAIL CLAMPS

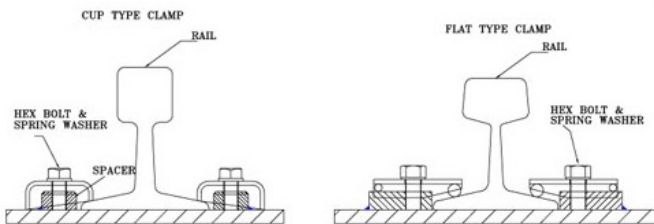

Rail clamp mainly used to maintain the lateral position of the rail, especially crane rail, but allow necessary longitudinal movement.

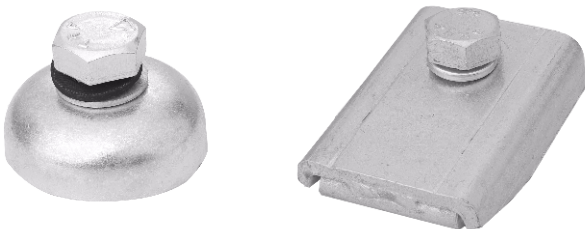

	Cup Type	Flat Type
Bolt	20 x 35 mm	16 x 35 mm
Washer	20 mm	16 mm
Body Material	Galvanised MS	Galvanised MS
Body Thickness	4 mm	5 mm

RUBBER BUFFER


Rubber buffer belongs to the safety protection device in the lifting machinery and equipment. installed in the orbital running equipment on the security components. The function of the rubber buffer is taking up the impact force generated by the impact during the operation so as to effectively protect and reduce the damage caused by equipment. Rubber buffer mainly used in Overhead cranes, Gantry crane, Jib crane, Electric hoist.

- 50 MM, 100 MM & 150 MM



ELECTRO HYDRAULIC THRUSTER BREAK


Thruster brake is a device to retard the speed of Moving machinery and to stop it accurately to the desired Position. The braking is Applied to the brake shoes by a pre-stressed compression spring. The shoes on the rotating brake drum retarding its speed, and finally Stop it. The releasing of the brake and compressing of the spring is done by thruster. The thruster rods are connected with the Break by Means of an angle lever. Our thruster brakes are Suitable for 440 volts, 3 phase A.C. supply.

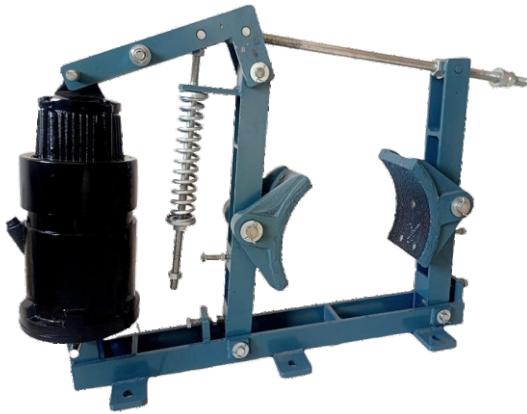

Brake Model No.	Brake Drum Dia. MM	Brake Torque		Brake Model No.	Brake Drum Dia. MM	Brake Torque	
		kg-m	N-m			kg-m	N-m
EHTB-100-18	100	6	60	EHTB-400-46	400	90	900
EHTB-150-18	150	9	90	EHTB-400-68	400	110	1100
EHTB-160-18	160	9	90	EHTB-500-46	500	190	1900
EHTB-200-18	200	20	200	EHTB-500-68	500	290	2900
EHTB-250-18	250	35	350	EHTB-500-114	500	485	4580
EHTB-250-18	250	42	420	EHTB-600-68	600	350	3500
EHTB-300-18	300	62	620	EHTB-600-114	600	580	5800

AC SOLENOID BRAKE

AC Solenoid Brake that are suitable for AC supply up to 440 volts and are available for a wide range of drum size 100 mm To 250 mm Diameter. The lever is hinged on the main arm, Which is connected to the side arm with a tie rod & is stressed by pre-loaded compression spring. The compression of spring can be adjusted to set the braking torque to desired value.

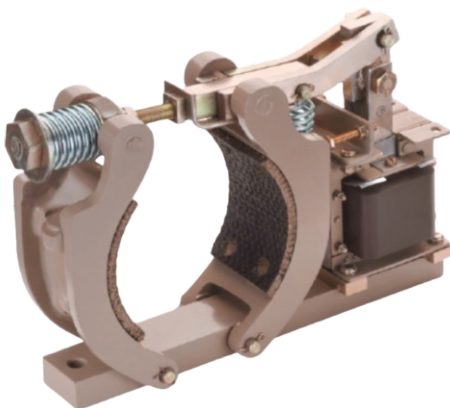


Features :

- Solenoid coil can be removed without disturbing the Brake Adjustments.
- Braking Torque can be adjusted easily & quickly.
- Long Life & Ease of Maintenance.


AC Brakes Range :

- Available for 4 / 5.5 / 7 / 10 Inch Diameter


BRAKE SPARE



AC Solonied



Disc Brake Coil



Shoe Brake Coil



Brake liner

ELECTROMAGNETIC AC DISC BRAKE

Electromagnetic AC Fail safe spring applied safety brakes have strong and robust design with high quality insulation coil & liner plate. When electric supply 230/440 VAC is given to the brake, coils get energized and instantly attracts the floating plate against the spring force, thus releasing the motor shaft and allows machine shaft to rotate freely. When supply is cut-off brake coil get de-energized resulting compressed springs push the floating plate back to its original position which clamps the floating plate against the mounting plate of the brake and stops the driving shaft instantly.



Brake Model	H.P	RPM	Frame Size	TQ. KG.M.	O.D.	Shaft Dia Ø	PCD Ø
ACB-130	0.25 / 0.50	1400	63 / 71	0.2	120	14	82.5/M6X4
ACB-140	0.75	1400	80	0.6	133	19	100/M8X4
ACB-150	0.50 / 1.0	900/1400	80	1.1	153	19	100/M8X4
ACB-150-X	2.0 / 3.0	1400	90 / 90 L	2.2	153	24	100/M8X4
ACB-190	3.0	1400	100	2.5	193	28	130XM8X4
ACB-190-X	5.0 / 7.5	1400	100 / 112	4.5	193 / 235	28	130XM8X4
ACB-235	5.0 / 7.5	900 / 1400	132	4.0	235	38	175/M10X4
ACB-235-X	7.5 / 10.0	900 / 1400	135	6.0	235	38	175/M10X4
ACB-290	12.5	1400	160	5.5	275	42	175/M10X4
ACB-290-X	12.5 / 15	900 / 1400	160	11	275	42	175/M10X4

DC ELECTROMAGNETIC BRAKES

Spring actuated and electromagnetically released disk brake powered by direct current. Designed for braking rotating machine parts and their precision positioning. In the absence of current, the brake torque is provided by strong compression springs developing an axial course on the brake armature plate which ultimately presses it against mounting plate. The brake torque is transferred to the shaft via rotor and splined hub.

Features :

- Easy Mounting
- Compact Design
- Emergency manual release with handle
- Easy Maintenance
- Adjustable Torque
- Air gap adjustable without removing brake



Brake Model	Input P20(W)	RPM	TQ. Max Rat(Nm)	O.D.	Shaft Dia. Ø	PCD Ø	Weight K.G.
DCB-06	20	3000	4.0	87	11	72	1.3
DCB-08	25	3000	8.0	105	15	90	2.2
DCB-10	30	3000	16.0	130	24	112	3.75
DCB-12	40	3000	32.0	150	28	132	5.75
DCB-14	50.0	3000	60.0	165	30	145	8.25
DCB-16	76	3000	100.0	190	35	170	11.72
DCB-18	85	3000	150.0	217	48	196	18.15
DCB-20	100	3000	260.0	254	55	230	27.85
DCB-25	110	3000	400	302	70	278	42.56
DCB-30	140	3000	600	302	70	278	48.56

MASTER CONTROLLER

Master controller are used for remote operation of contractors' equipment controlling E.O.T. Cranes & Drives. The controllers are made in dust proof enclosure in IP-54 degree of protection, up to 6 notches either side with maximum 24 contacts as per desired sequence with spring return arrangement@ dead man's handle arrangement are available. Master controllers are compact up to 4-0-4 step suitable for Hoist-Grab, CT-LT maximum contacts 16 per motaion with spring return arrangement.



Body Material	MS Steel
Protection Degree	IP-41
Mounting Position	Horizontal
Contact Material	Silver Cadmium
Rated Voltage	500 v A.C.
Thermal Test Current	40 Amp
Cable Entries	2X20 / 2X26 standard Conduit
Frequency of Operation	1000 switching per hour
No. of Contacts	24 Maximum
No. of Steps	6-0-6 Maximum

Anti-Collision Device

The anti-collision system is a safety device to avoid collision of two electric overhead travelling cranes working on the same rails. For one pair of cranes two sets of anti-collision systems are required. Each set consist of an Emitter/Sensor module and a reflector. The system works on the principal of retro reflective infrared waves. It consist of an Emitter/Sensor and a special reflector. The Emitter emits the infrared in the direction of the reflector. The reflector reflects these infrared waves back to the sensor. The sensor senses the presence of these reflected infrared waves and activates an alarm signal and stop/reduce the speed of the cranes.



Voltage Supply	110 V AC / 230 V AC	110 V AC / 230 V AC
No. of set points	Single	Single
Contacts Rating	3Amps at 220 V AC	3Amps at 220 V AC
Indication	LED	LED
Device Dimension	180X145X55 mm	180x145x55 mm
Reflector Dimension	130x75 mm	130x75 mm
Range	0-3 Meter	3-10 Meter

CRANE LIMIT SWITCH

ROTARY GEARED LIMIT SWITCH



Rotary geared type limit switches are used on control circuit of Reversing drivers so as to limit their rotation/movement with a predetermined position. The driving motion is transmitted by worm gear through worm shaft. The rotations & movements are transmitted to switches by adjustable cams. Rotary geared type limit switch suitable for use on reversing drives such as Hoists, Winches & various other mechanisms used in steel plant.

- Aluminum Body with power coating IP-55
- 500 V.A.C Rated Voltage
- 40 Amps Thermal Test Current

WEIGHT OPERATED LIMIT SWITCH



Weight Operated Limit Switches are used on control / power circuit of reversing drives so as to limit their rotation / movement within a predetermined position. When the snatch block of the crane reaches its top position the snatch block pushes a plate which is hanging from one end of the lever of the limit switch. When the snatch block of the crane reaches its top position the snatch block pushes a plate which is hanging from one end of the lever of the limit switch.

- Aluminum Body with power coating IP-55
- 500 V.A.C Rated Voltage
- 40 Amps Thermal Test Current

LEVER TYPE LIMIT SWITCH



Lever Type Limit Switch operates the control equipments when a cam moving with loads actuates change over contacts of motor of an moving equipments when a cam moving with loads actuates the lever of Limit Switch. This turns the cam on a square shaft and operate the NO/NC change over contact elements. A two or more contact elements are operated by respective rotating cams, which are suitably fixed on a square cam shaft turned by lever.

- Aluminum Body with power coating IP-55
- 500 V.A.C Rated Voltage
- 40 Amps Thermal Test Current

WORM DRIVE LIMIT SWITCHES

Worm Drive Limit Switch FGLS are suitable for use on reversing drives, such as Hoists, Cranes, Winches, Rolling Mills, Theatre Curtains, Coke Oven etc. The driving motion is transmitted by worm gear. All gears and hubs are made of low wear thermoplastic material. The rotational movements are transmitted to switches by adjustable cams.



Body Material	Black 15% Glass Filled Nylon
Cover Material	Orange ABS Plastic
Gear Ratio	1:50, 1:100, 1:200 & 1:400
No Of Contacts	2NC or 1NO + 1NC
Ampere	10Amps
Voltage	500V AC
Protection	IP 65 as per IEC 60529:2013
Temperature	-25 C to 50 C
Mounting Position	Any Position
Contact Material	Brass Material with Nickle Plated & Silver Cadmium tip
Connection	Screw Terminal Type

DSL INDICATING LAMP



DSL Indicating lamps are used in factories where DSL busbars are installed to know when 3 Phase power is applied to the crane. DSL Indicating Lamp take 3 phasepower as input and emit three colors in the visiblespectrum- Red, Yellow and Blue. They act like a statusindicator for the presence or absence of the 3-phaseinput power. This system directly connected to bus baror panel board of crane. We have used best quality L.E.D.Indicator Lamps with proper heat sink to obtain long lifefrom the indicator. The intensity of the light reduces orincreases with the change in 3 phase input voltage. Inthe situation where, 1 phase is not available or phasefailure, the light for that particular phase will switch off.

LIFTING EQUIPMENTS

PUSH-PULL TROLLEYS

Our push-pull trolley suits a variety of beam widths to provide an easy and convenient means to move a load. The push-pull trolley is designed to attach to I-beam flange to provide a mobile anchor point for hook mounted hoists or chain pulley block.



SINGLE STUD TYPE

Available Size
0.5, 1.0 & 2.0-Ton Capacity



DOUBLE STUD TYPE

Available Size
0.5, 1.0 & 2.0-Ton Capacity

GEARED TROLLEYS

Geared Trolleys are designed for moving the trolley along the I-Beam axis by pulling the hand chain in the upward and downward direction to move the lifted load. Our geared trolley comes with powder coated finish & it can be adjustable to various beam widths.



SINGLE STUD TYPE

Available Size
1.0, 2.0 & 3.0-Ton Capacity



DOUBLE STUD TYPE


Available Size
1.0, 2.0 & 3.0 & 5.0-Ton Capacity

HAND WINCH



CAPACITY

0.5, 1.0 & 2.0 Ton

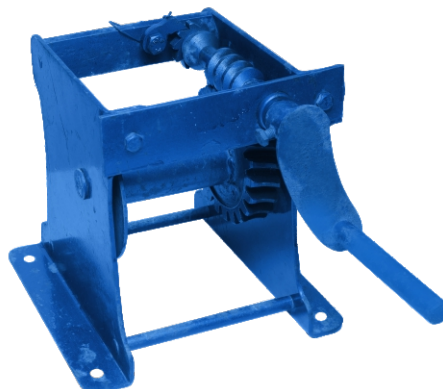

CAPACITY

0.5 & 1.0 Ton

SCISSOR LIFTING CLAMP

The Scissor Clamp Lifter is equipped with a rubber contact pad for the safe handling of materials. Suitable for lifting marble and granite slabs, tombstones, concrete barriers, curbs (kerbs) and median walls.



Model No.	SLC-01
Grip Range	0-110 MM
Load Capacity	750 Kg
Gross Weight	21 Kg



Model No.	SLC-02
Grip Range	0-300 MM
Load Capacity	1000 Kg
Gross Weight	25 Kg

Industrial **CRANE CONTROL & LIFTING** Equipments



BHAVANI CRANE & LIFTING EQUIPMENTS

Address : PLOT NO 25, PERMESHVAR IND. GATE,
J K INDUSTRIAL AREA, VIL : PIPLANA,
NEAR LOTHDA TAL : KOTDA SANGANI,
DIST : RAJKOT – 360 024

E-mail : info@bhavanicabletrolley.com
bhavanienterprise01@gmail.com
bhvanicrane.lifting@gmail.com

Website : www.bhavanicabletrolley.com

Mobile No. : +91 94272 20360
+91 98988 05458
+91 84697 53949

