

Company Profile

Bhavani Crane & Lifting Equipments is a very well equipped manufacturer of Material Handling Equipments, Crane Control Equipments & Lifting Equipments. We have developed our roots in this field from more than last two decades. We established a proud reputation in the market place, as a quality conscious supplier of customer specific products.

Bhavani Crane & Lifting Equipments is an expert in manufacturing High Quality Electric Crane Components & Lifting Products. Our purpose is to ensure customer satisfaction through development, manufacturing & delivering Quality products which are Durable & technologically advanced. To Supply innovative products of consistent Quality through continual improvements in our Quality Management system for Customer satisfaction.

We aspire to become one of the most reputed suppliers without negotiating over quality of our products and services with great determination we maintain high standards of integrity in building long-term mutually beneficial relationships with our working partners inside and outside our industry.

Vision



Power Plant



Chemical Industry



Paper Industry



Ports



Crane Industry



Heavy Engineering & Machine Tools Industry

Electric Crane Cable Double Wheel Cable Carrier Suitable For 06 – 08 MM Wire Rope



Model No : BE-37

Cable Clamping
Sq. 7-14 MM



Model No : BE-37-N

Cable Clamping
Dia. 7-14 MM



Model No : BE-38

Cable Clamping
Dia. 13 & 18 MM



Model No : BE-38-N

Cable Clamping
Dia. 16-20 MM



Model No : BE-38-A

Cable Clamping
Dia. 14, 16, 14 & 10 MM



Model No : BE-39

Cable Clamping
8 X 34 MM



Model No : BE-40

Cable Clamping
Width 55 MM



Model No : BE-41

Cable Clamping
Dia. 22 MM



Model No : BE-42

Cable Clamping
Dia. 32 MM



Model No : BE-43

Cable Clamping
Dia. 11 to 16 MM



Model No : BE-43-A


Cable Clamping
Dia. 40 MM

Electric Crane 2 Bearing Metal Trolley Suitable For 50 mm T-Channel




Model No : BE-15

Cable Clamping
Sq. 7-14 MM




Model No : BE-16

Cable Clamping
Dia. 13 to 18 MM



Model No : BE-17

Cable Clamping
8 X 34 MM



Model No : BE-18

Cable Clamping
Width 40 MM



Model No : BE-19

Cable Clamping
Dia. 22 MM



Model No : BE-20

Cable Clamping
Dia. 32 MM



Model No : BE-21

Cable Clamping
Dia. 11 to 16 MM



Model No : BE-28-A

Cable Clamping
Width 80 MM



Model No : BE-53


Cable Clamping
Width 80 MM

Electric Crane I-BEAM Metal Trolley



Model No : BE-30-A

- Cable Clamping Width 120 mm.
- Suitable For 50 to 200 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal/Nylon



Model No : BE-31

- Cable Clamping Width 80 mm.
- Suitable For 50 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal/Nylon Material



Model No : BE-33

- Cable Clamping Width 80 & 120 mm.
- Suitable For 50, 75 & 100 mm I-Beam.
- Body Material : Unbreakable Plastic Body
- Wheel : Nylon Material

Electric Crane Heavy Duty I-Beam Metal Trolleys




Model No : BE-32

- Cable Clamping Width 160 mm.
- Suitable For 75 to 200 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal/Nylon Material




Model No : BE-32-A

- Cable Clamping Width 125 mm.
- Suitable For 75 mm to 200 I-Beam.
- Body Material : Mild Steel
- Wheel : Metal




Model No : BE-32-B

- Cable Clamping Width 160 mm.
- Suitable For 75 & 200 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal



Model No : BE-32-C

- Cable Clamping Width 210 mm.
- Suitable For 75 to 150 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal



Model No : BE-35


- Cable Clamping Width 150 mm.
- Suitable For 50 to 100 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal



Model No : BE-35-A

- Cable Clamping Width 150 mm.
- Suitable For 50 & 100 mm I-Beam.
- Body Material : Mild Steel
- Wheel : Metal

PIN JOINT BUSBAR

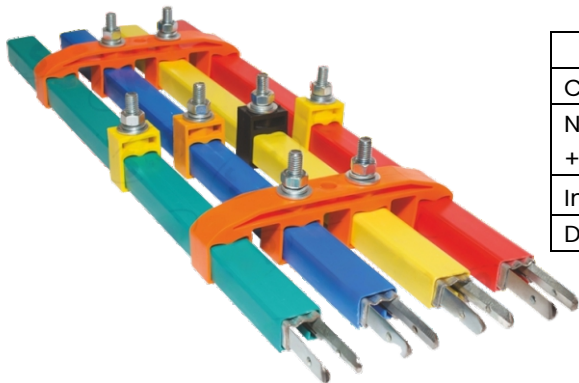

Technical Data Sheet For M type Pin Joint Busbar					
Conductor Busbar System	Galvanised Steel			Copper	
Nominal Current (A) at 100% Duty & +35°C	60	100	125	250	315
Impedance (Ω /M) at +35°C	3.6	2.9	2.5	0.345	0.335
DC Resistance (Ω /M) at +35°C	3.5	2.86	2.45	0.333	0.333

Components



1 Pole Hanger Clamp



4 Pole Hanger Clamp



Joint Cover



Copper Shoe



125 A Current Collector



125 A Copper Shoe with Cap




125 A Copper Shoe with Holder




Mounting Angle

HEAVY DUTY BUSBAR



Heavy Duty Busbar
Upto 1000 Amp



Jointer & Cover



500 Amp Collector

WIRELESS RADIO REMOTE CONTROL



F21-2S

Single Speed, 2 Buttons + Start/Stop

F21-2D

Single Speed, 2 Buttons + Start/Stop



F21-4S

Single Speed, 4 Buttons + Start + Emergency Stop

F21-4D

Double Speed, 4 Buttons + Start + Emergency Stop



F21-E1B

Single Speed, 6 Buttons + Start + Stop



F-24-8S

Single Speed, 8 Buttons + Start + Emergency Stop

F-24-8D

Double Speed, 8 Buttons + Start + Emergency Stop



F23-BB

Single Speed, 10 Buttons + Start + Stop



F-24-12S


Single Speed, 12 Buttons + Start + Emergency Stop

F-24-12D

Double Speed, 12 Buttons + Start + Emergency Stop

ELECTRO HYDRAULIC THRUSTER BREAK


Thruster brake is a device to retard the speed of Moving machinery and to stop it accurately to the desired Position. The braking is Applied to the brake shoes by a pre-stressed compression spring. The shoes on the rotating brake drum retarding its speed, and finally Stop it. The releasing of the brake and compressing of the spring is done by thruster. The thruster rods are connected with the Break by Means of an angle lever. Our thruster brakes are Suitable for 440 volts, 3 phase A.C. supply.

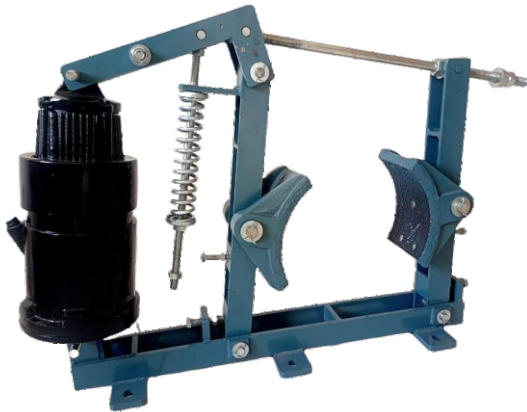

Brake Model No.	Brake Drum Dia. MM	Brake Torque		Brake Model No.	Brake Drum Dia. MM	Brake Torque	
		kg-m	N-m			kg-m	N-m
EHTB-100-18	100	6	60	EHTB-400-46	400	90	900
EHTB-150-18	150	9	90	EHTB-400-68	400	110	1100
EHTB-160-18	160	9	90	EHTB-500-46	500	190	1900
EHTB-200-18	200	20	200	EHTB-500-68	500	290	2900
EHTB-250-18	250	35	350	EHTB-500-114	500	485	4580
EHTB-250-18	250	42	420	EHTB-600-68	600	350	3500
EHTB-300-18	300	62	620	EHTB-600-114	600	580	5800

AC SOLENOID BRAKE

AC Solenoid Brake that are suitable for AC supply up to 440 volts and are available for a wide range of drum size 100 mm To 250 mm Diameter. The lever is hinged on the main arm, Which is connected to the side arm with a tie rod & is stressed by pre-loaded compression spring. The compression of spring can be adjusted to set the braking torque to desired value.

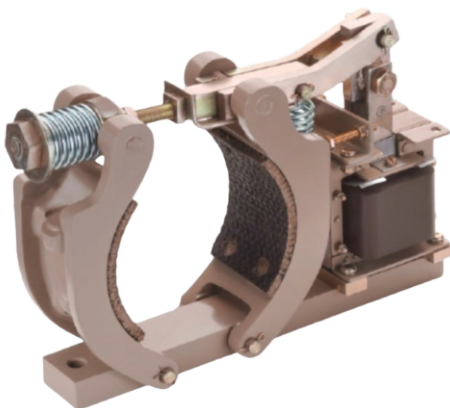


Features :

- Solenoid coil can be removed without disturbing the Brake Adjustments.
- Braking Torque can be adjusted easily & quickly.
- Long Life & Ease of Maintenance.


AC Brakes Range :

- Available for 4 / 5.5 / 7 / 10 Inch Diameter


BRAKE SPARE



AC Solonied



Disc Brake Coil



Shoe Brake Coil



Brake liner

MASTER CONTROLLER

Master controller are used for remote operation of contractors' equipment controlling E.O.T. Cranes & Drives. The controllers are made in dust proof enclosure in IP-54 degree of protection, up to 6 notches either side with maximum 24 contacts as per desired sequence with spring return arrangement@ dead man's handle arrangement are available. Master controllers are compact up to 4-0-4 step suitable for Hoist-Grab, CT-LT maximum contacts 16 per motion with spring return arrangement.



Body Material	MS Steel
Protection Degree	IP-41
Mounting Position	Horizontal
Contact Material	Silver Cadmium
Rated Voltage	500 v A.C.
Thermal Test Current	40 Amp
Cable Entries	2X20 / 2X26 standard Conduit
Frequency of Operation	1000 switching per hour
No. of Contacts	24 Maximum
No. of Steps	6-0-6 Maximum

Anti-Collision Device

The anti-collision system is a safety device to avoid collision of two electric overhead travelling cranes working on the same rails. For one pair of cranes two sets of anti-collision systems are required. Each set consist of an Emitter/Sensor module and a reflector. The system works on the principal of retro reflective infrared waves. It consist of an Emitter/Sensor and a special reflector. The Emitter emits the infrared in the direction of the reflector. The reflector reflects these infrared waves back to the sensor. The sensor senses the presence of these reflected infrared waves and activates an alarm signal and stop/reduce the speed of the cranes.



Voltage Supply	110 V AC / 230 V AC	110 V AC / 230 V AC
No. of set points	Single	Single
Contacts Rating	3Amps at 220 V AC	3Amps at 220 V AC
Indication	LED	LED
Device Dimension	180X145X55 mm	180x145x55 mm
Reflector Dimension	130x75 mm	130x75 mm
Range	0-3 Meter	3-10 Meter

LIFTING EQUIPMENTS

PUSH-PULL TROLLEYS

Our push-pull trolley suits a variety of beam widths to provide an easy and convenient means to move a load. The push-pull trolley is designed to attach to I-beam flange to provide a mobile anchor point for hook mounted hoists or chain pulley block.



SINGLE STUD TYPE

Available Size
0.5, 1.0 & 2.0-Ton Capacity



DOUBLE STUD TYPE

Available Size
0.5, 1.0 & 2.0-Ton Capacity

GEARED TROLLEYS

Geared Trolleys are designed for moving the trolley along the I-Beam axis by pulling the hand chain in the upward and downward direction to move the lifted load. Our geared trolley comes with powder coated finish & it can be adjustable to various beam widths.



SINGLE STUD TYPE

Available Size
1.0, 2.0 & 3.0-Ton Capacity



DOUBLE STUD TYPE

Available Size
1.0, 2.0 & 3.0 & 5.0-Ton Capacity

Industrial **CRANE CONTROL & LIFTING** Equipments



BHAVANI CRANE & LIFTING EQUIPMENTS

Address : PLOT NO 25, PERMESHVAR IND. GATE,
J K INDUSTRIAL AREA, VIL : PIPLANA,
NEAR LOTHDA TAL : KOTDA SANGANI,
DIST : RAJKOT – 360 024

E-mail : info@bhavanicabletrolley.com
bhavanienterprise01@gmail.com
bhvanicrane.lifting@gmail.com

Website : www.bhavanicabletrolley.com

Mobile No. : +91 94272 20360
+91 98988 05458
+91 84697 53949

