


CRN Power Control: CAMO-TD3-GRUOnly

Nakagami-m Fading Channel Performance Report


Nakagami-m = 2.0 | Episodes = 5 | Steps/Episode = 20 | SINR Threshold = 1.0 dB

Metric	CAMO-TD3-GRUOnly	Winner
Avg Reward (last 100 ep)	23.1702	CAMO-TD3-GRUOnly
SU Throughput (bits/s/Hz)	1.6612	CAMO-TD3-GRUOnly
PU Throughput (bits/s/Hz)	0.9559	CAMO-TD3-GRUOnly
Outage Probability	0.3100	CAMO-TD3-GRUOnly
Average BER	0.064120	CAMO-TD3-GRUOnly
Training Time (s)	1.1	-


SINR vs BER - Nakagami-m=2 Fading Channel
(BPSK Modulation, Secondary User)

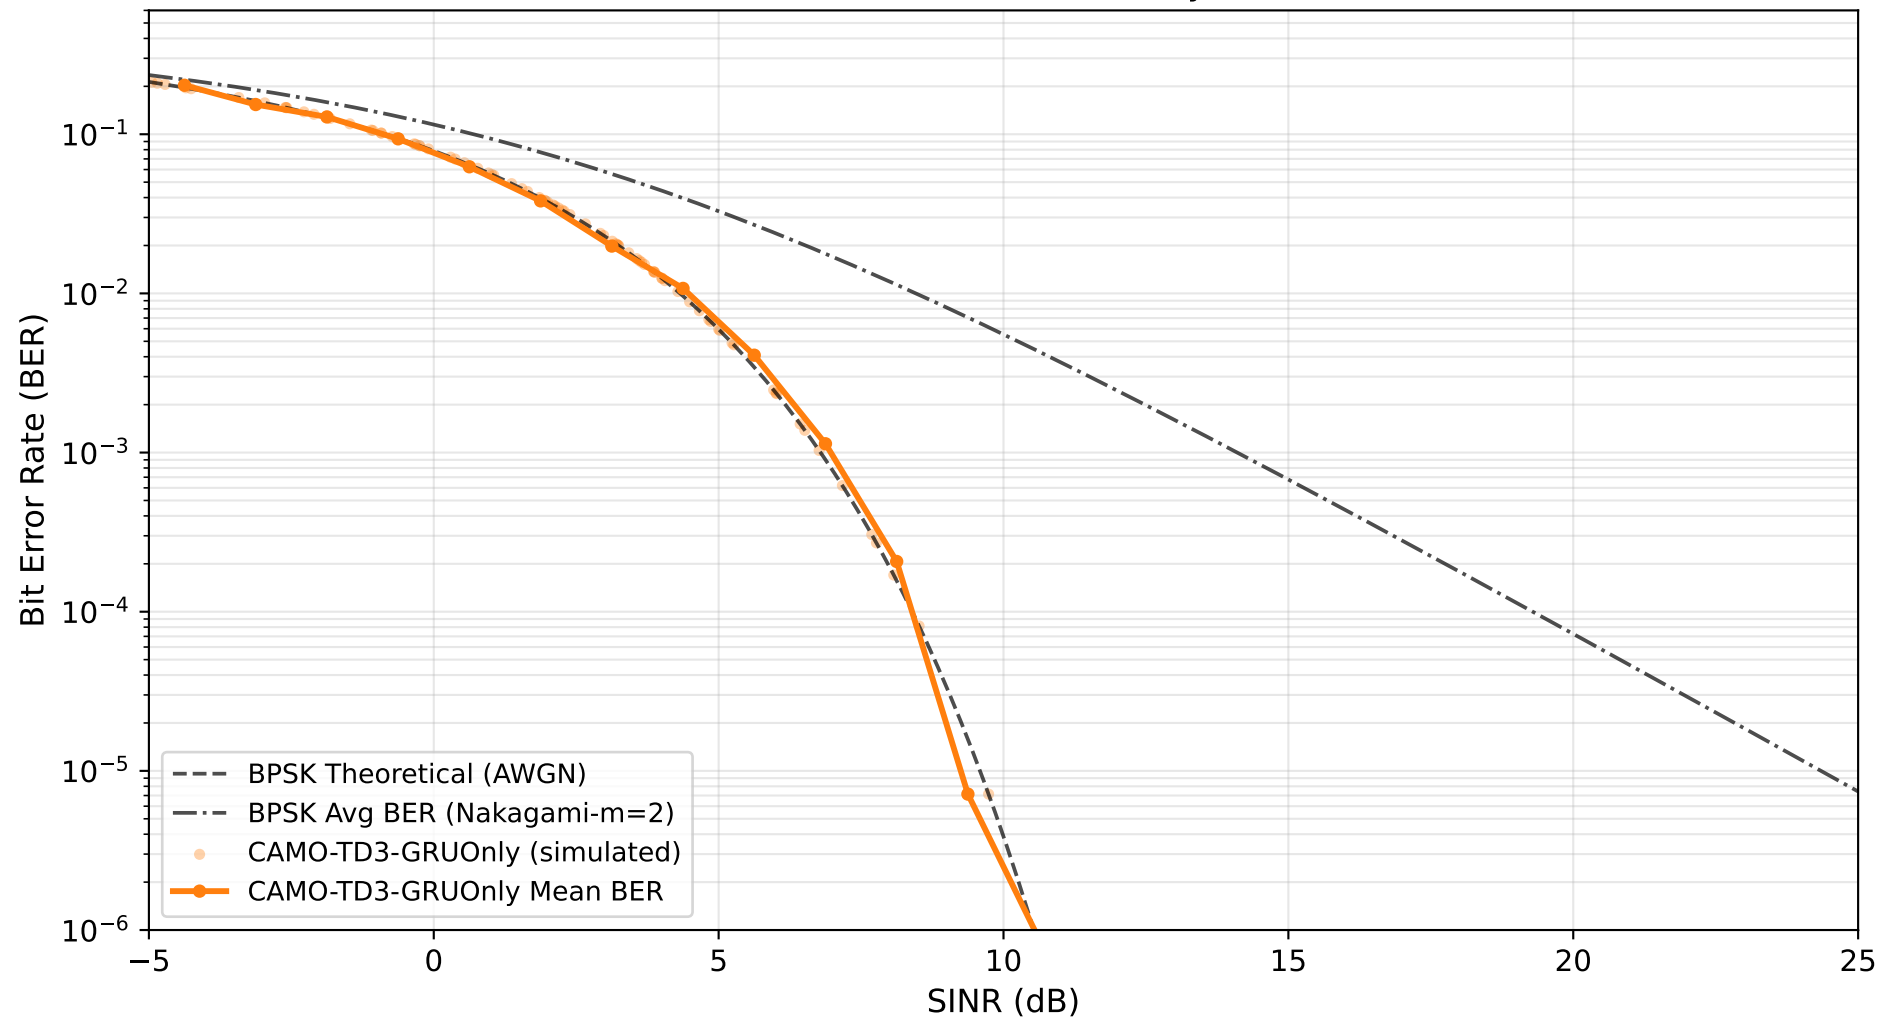


Primary User SINR vs BER - Nakagami-m=2 Fading Channel
(BPSK Modulation | Effect of SU Interference)

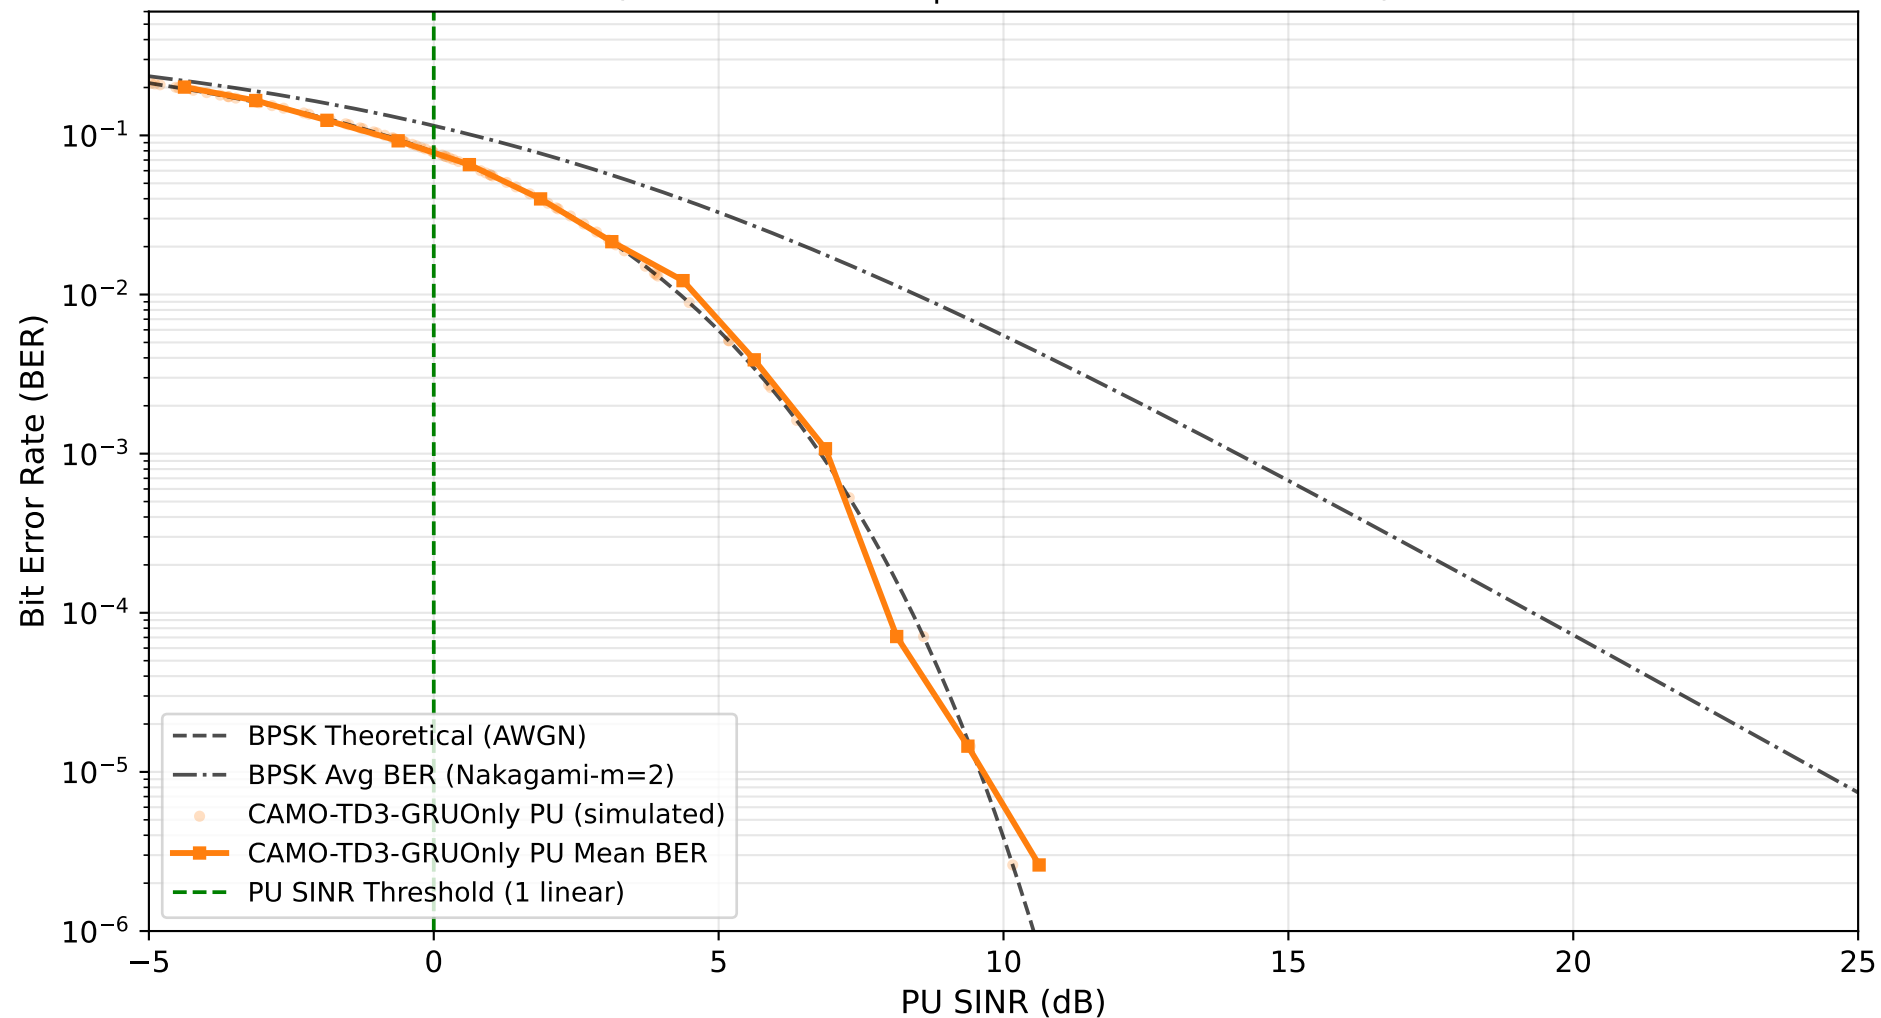


Secondary User (SU) Throughput vs Episodes

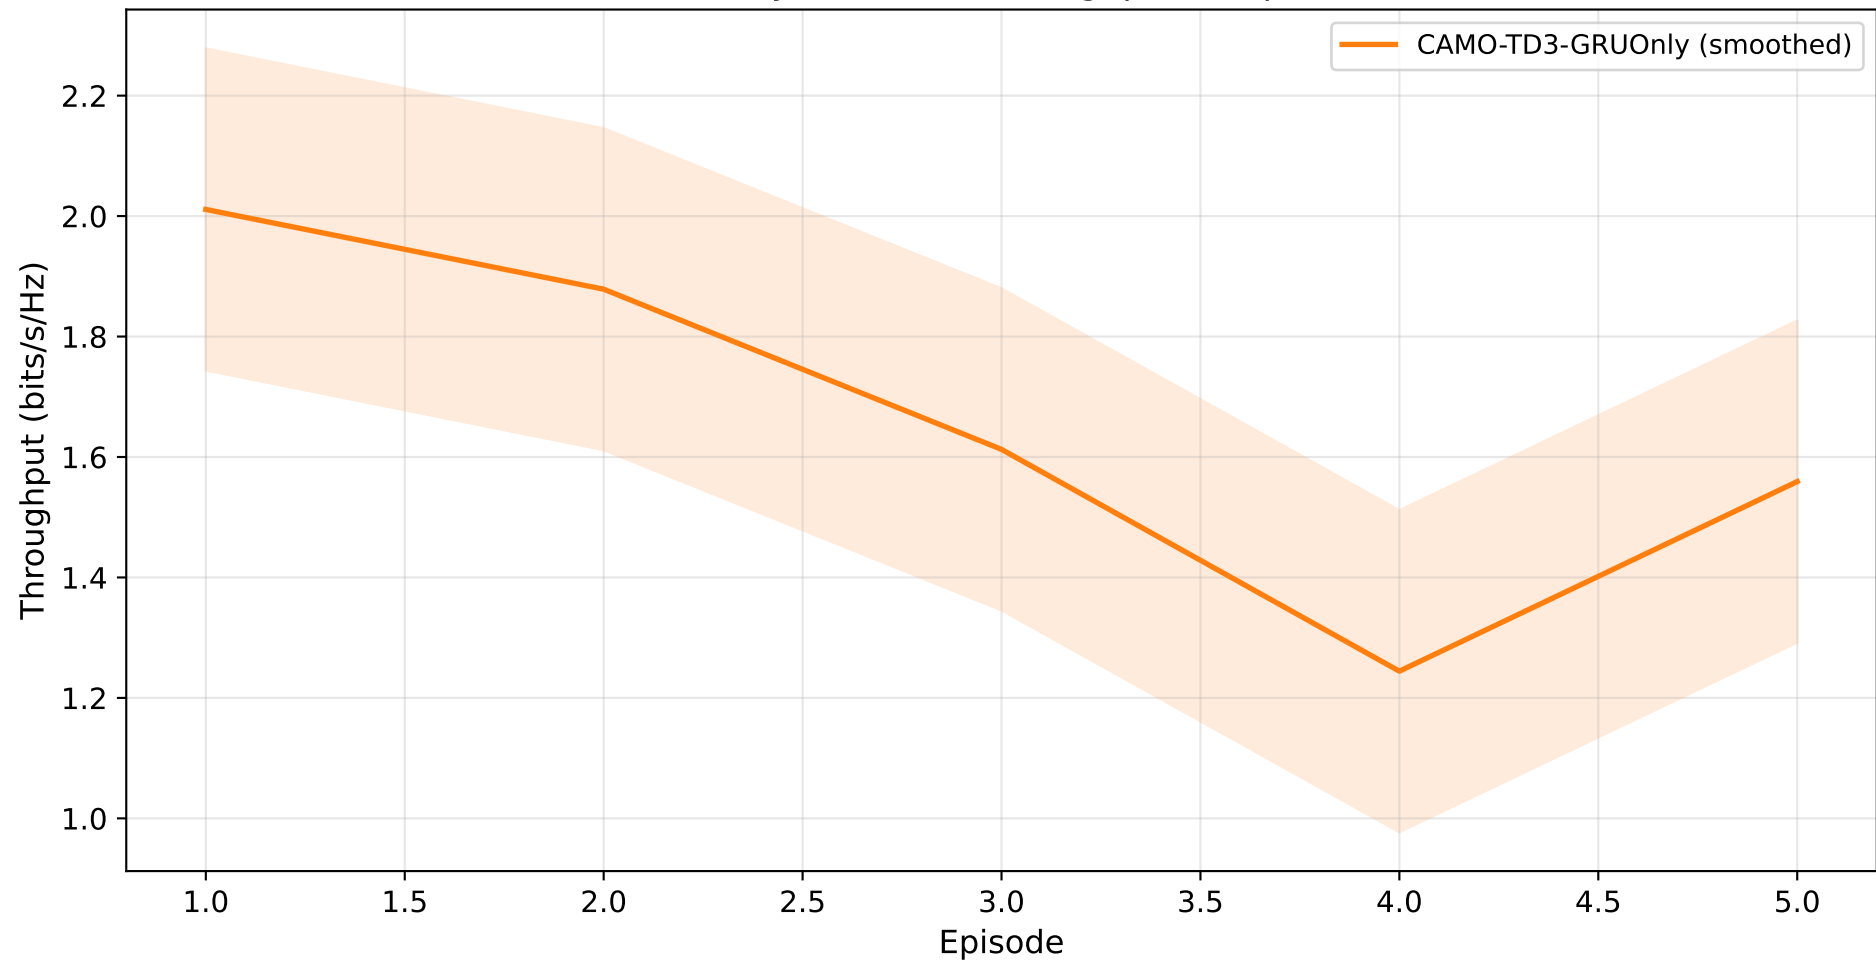



Primary User (PU) Throughput vs Episodes

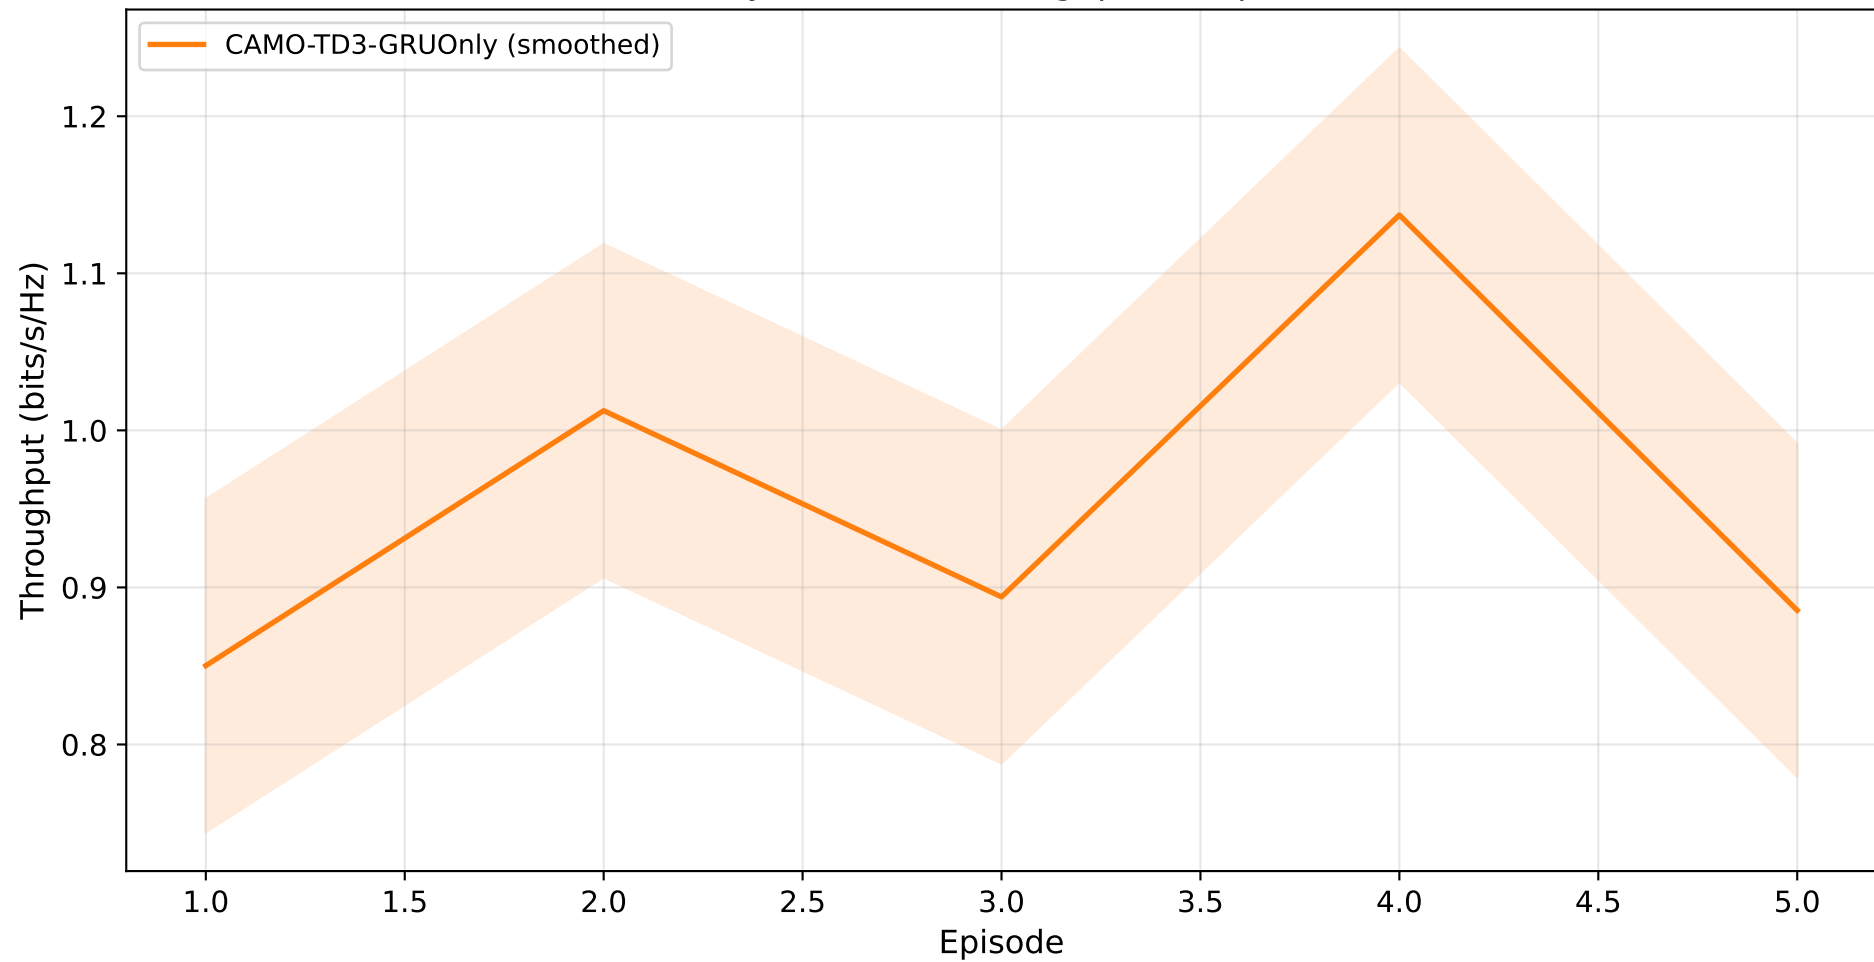

Outage Probability vs Episodes
(SINR_s < 1.0 threshold, rolling per episode)

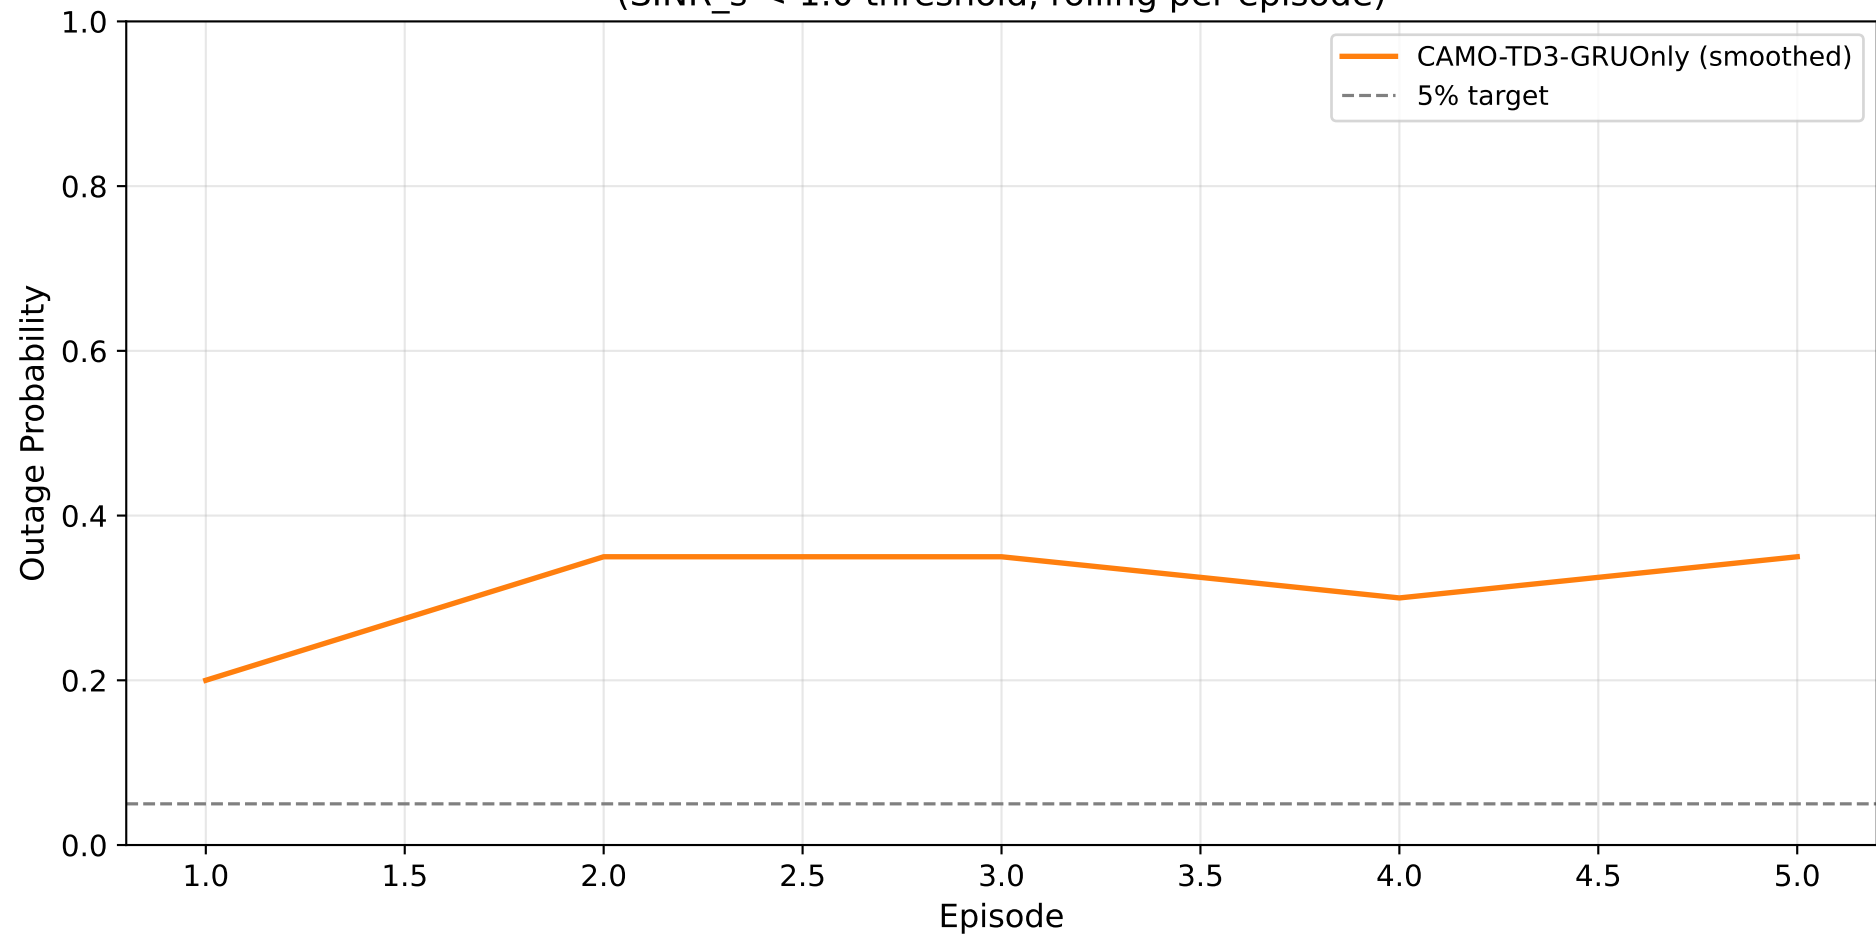


Outage Probability vs SINR Threshold (Empirical CDF) — Imperfect CSI

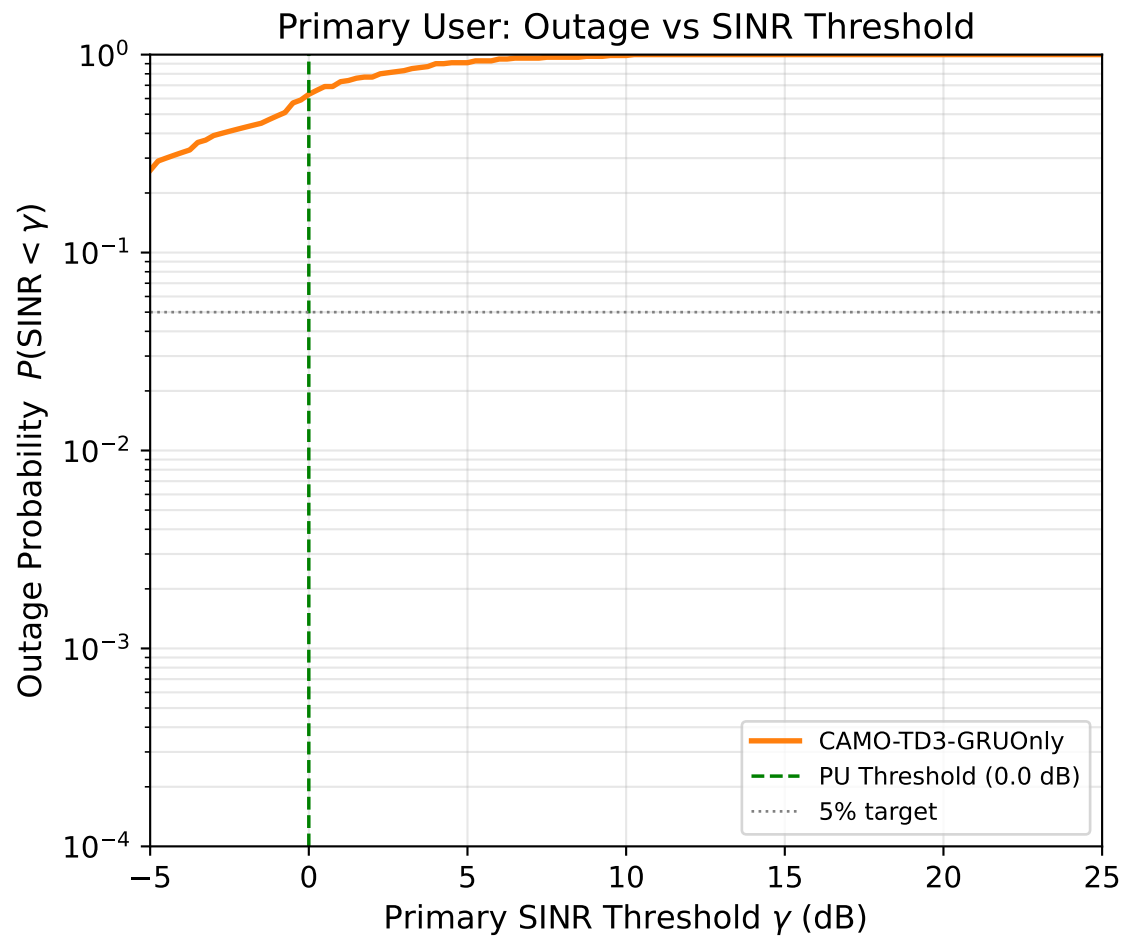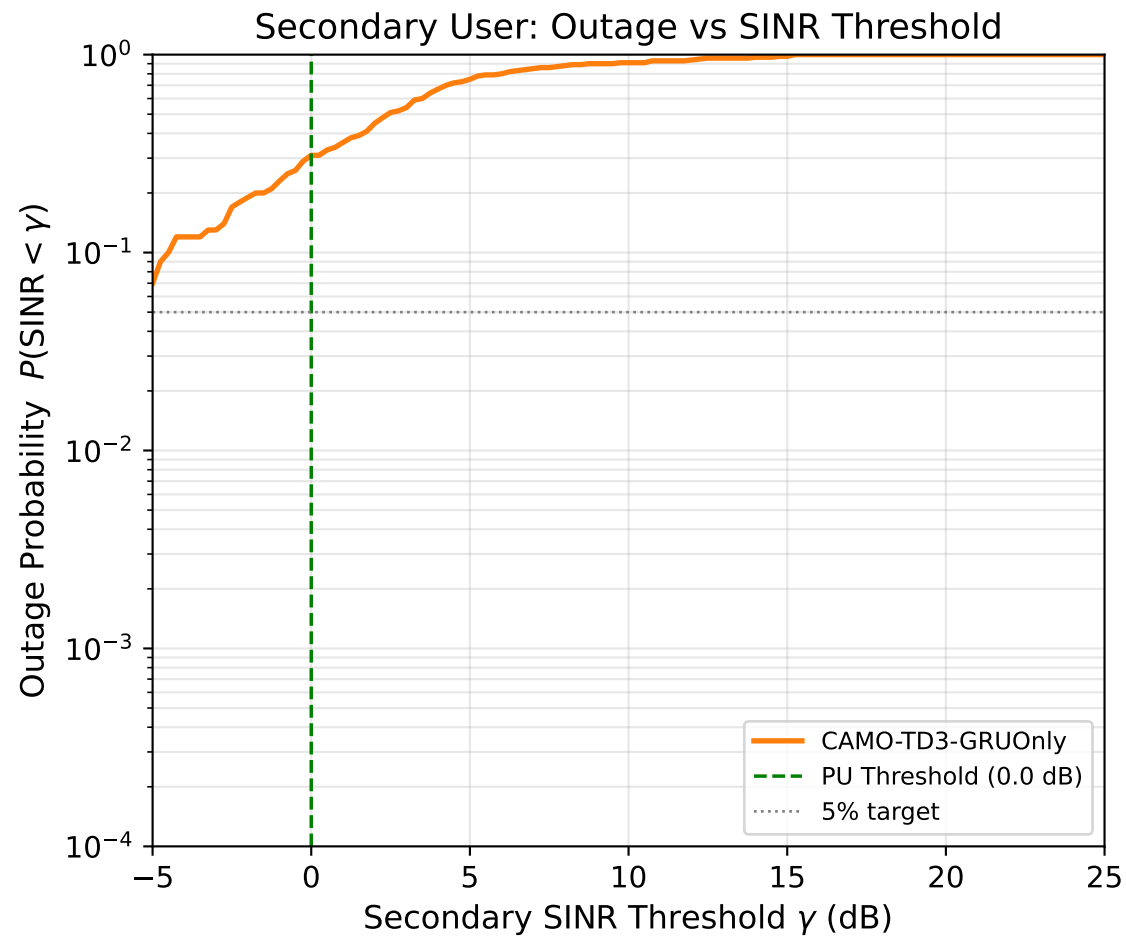


BER vs SINR — Algorithm Comparison under Imperfect CSI

Secondary User: BER vs SINR

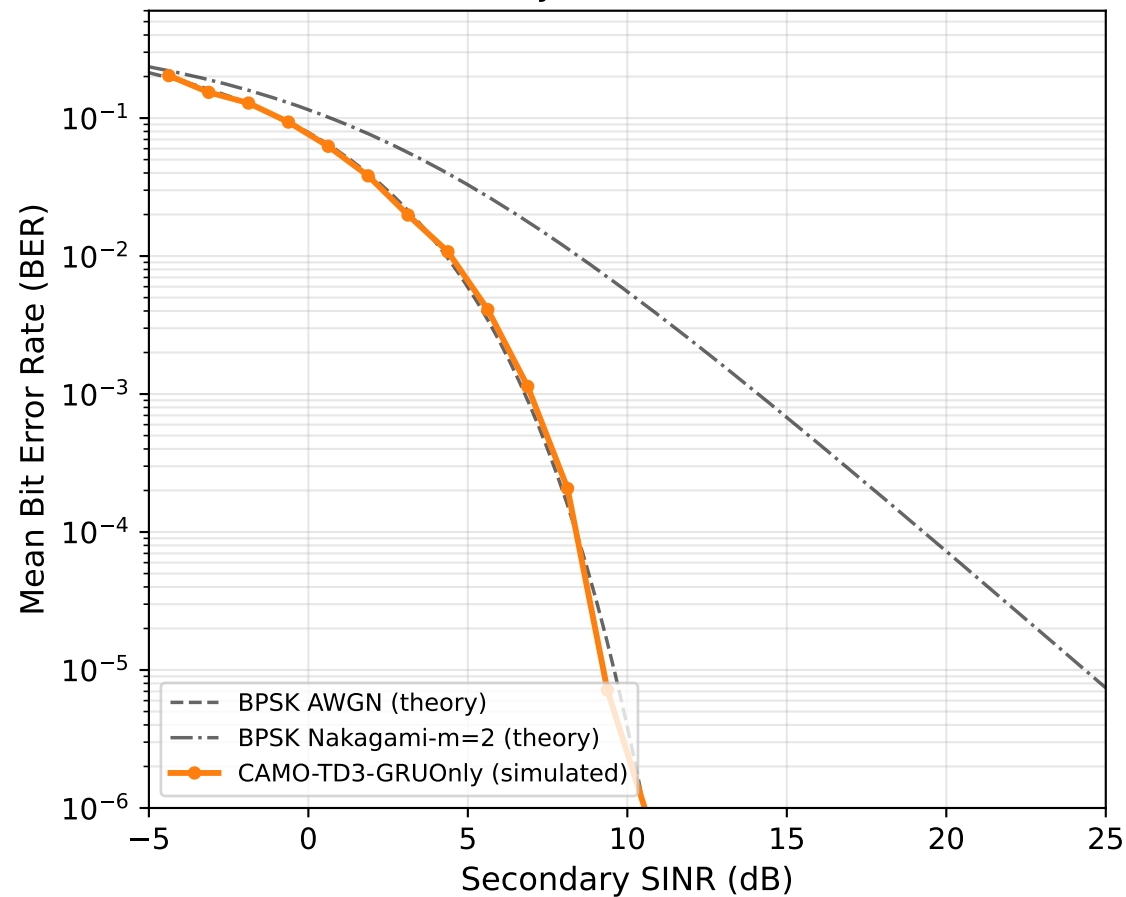


Primary User: BER vs SINR

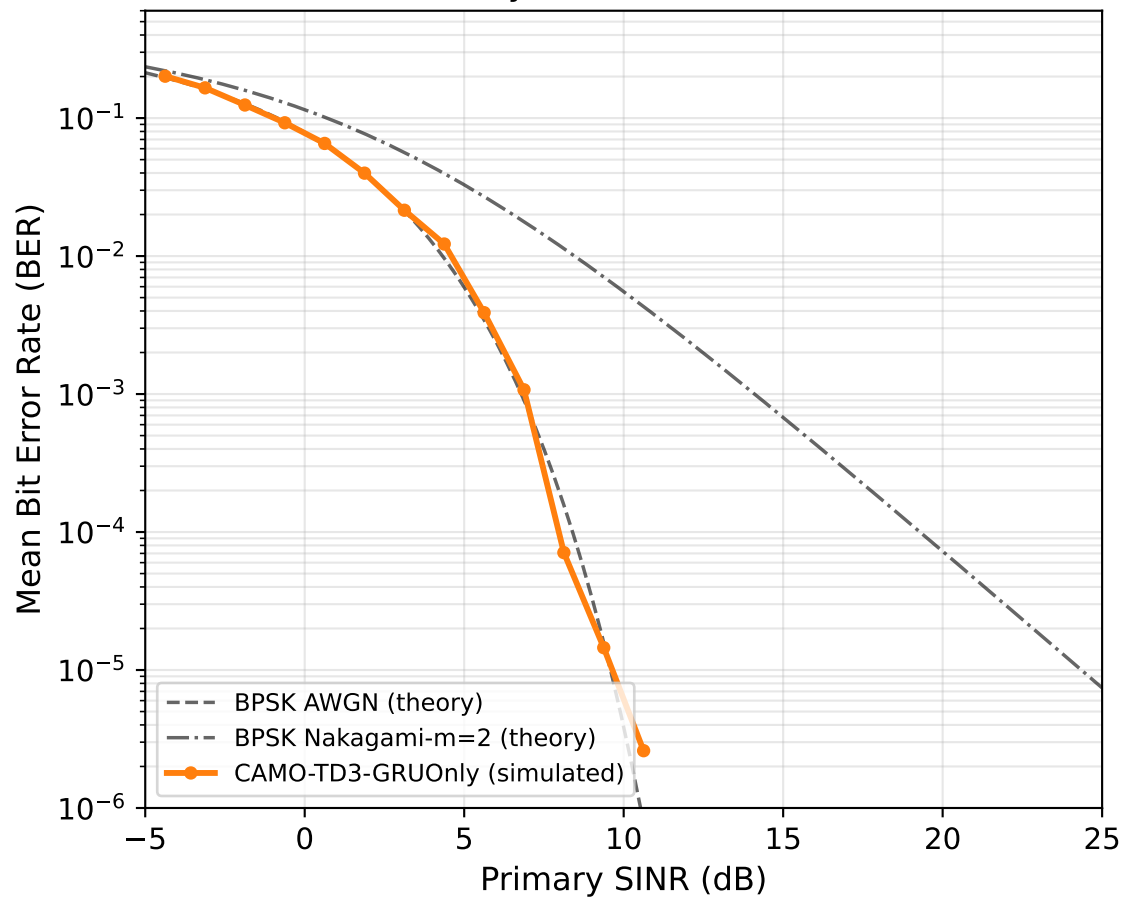

Episode Reward Curves - CAMO-TD3-GRUOnly

CAMO-TD3-GRUOnly Reward Curve

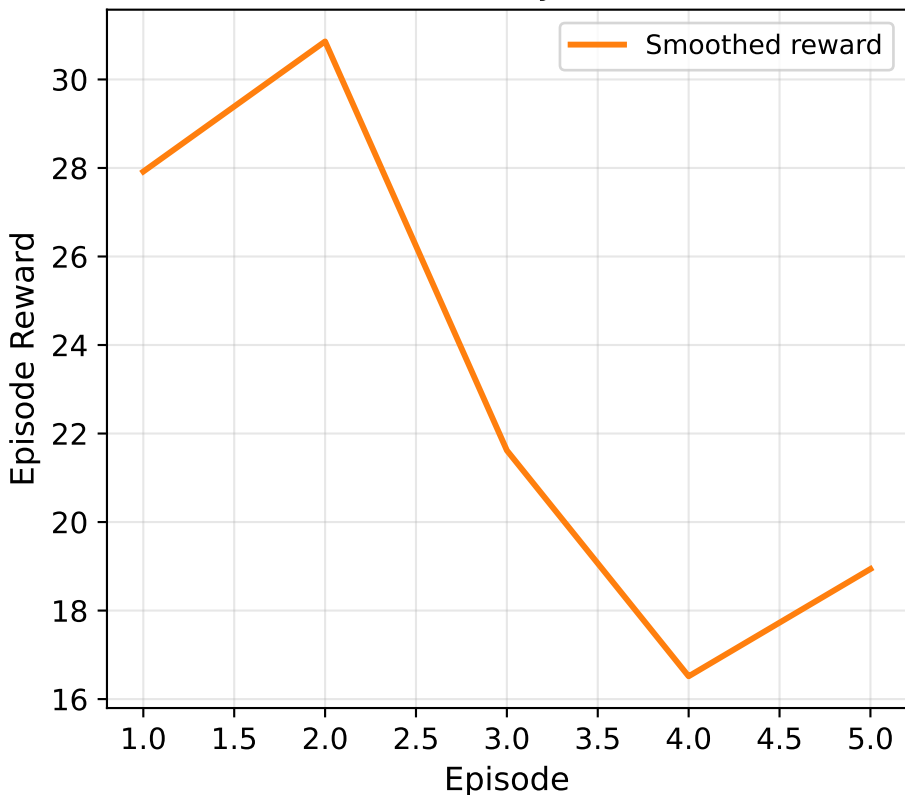

CAMO-TD3-GRUOnly - Reward Comparison

