


CRN Power Control: CAMO-TD3-LambdaOnly Nakagami-m Fading Channel Performance Report


Nakagami-m = 2.0 | Episodes = 5 | Steps/Episode = 20 | SINR Threshold = 1.0 dB

Metric	CAMO-TD3-LambdaOnly	Winner
Avg Reward (last 100 ep)	20.5100	CAMO-TD3-LambdaOnly
SU Throughput (bits/s/Hz)	1.5450	CAMO-TD3-LambdaOnly
PU Throughput (bits/s/Hz)	1.0205	CAMO-TD3-LambdaOnly
Outage Probability	0.3400	CAMO-TD3-LambdaOnly
Average BER	0.076841	CAMO-TD3-LambdaOnly
Training Time (s)	0.8	-


SINR vs BER - Nakagami-m=2 Fading Channel
(BPSK Modulation, Secondary User)

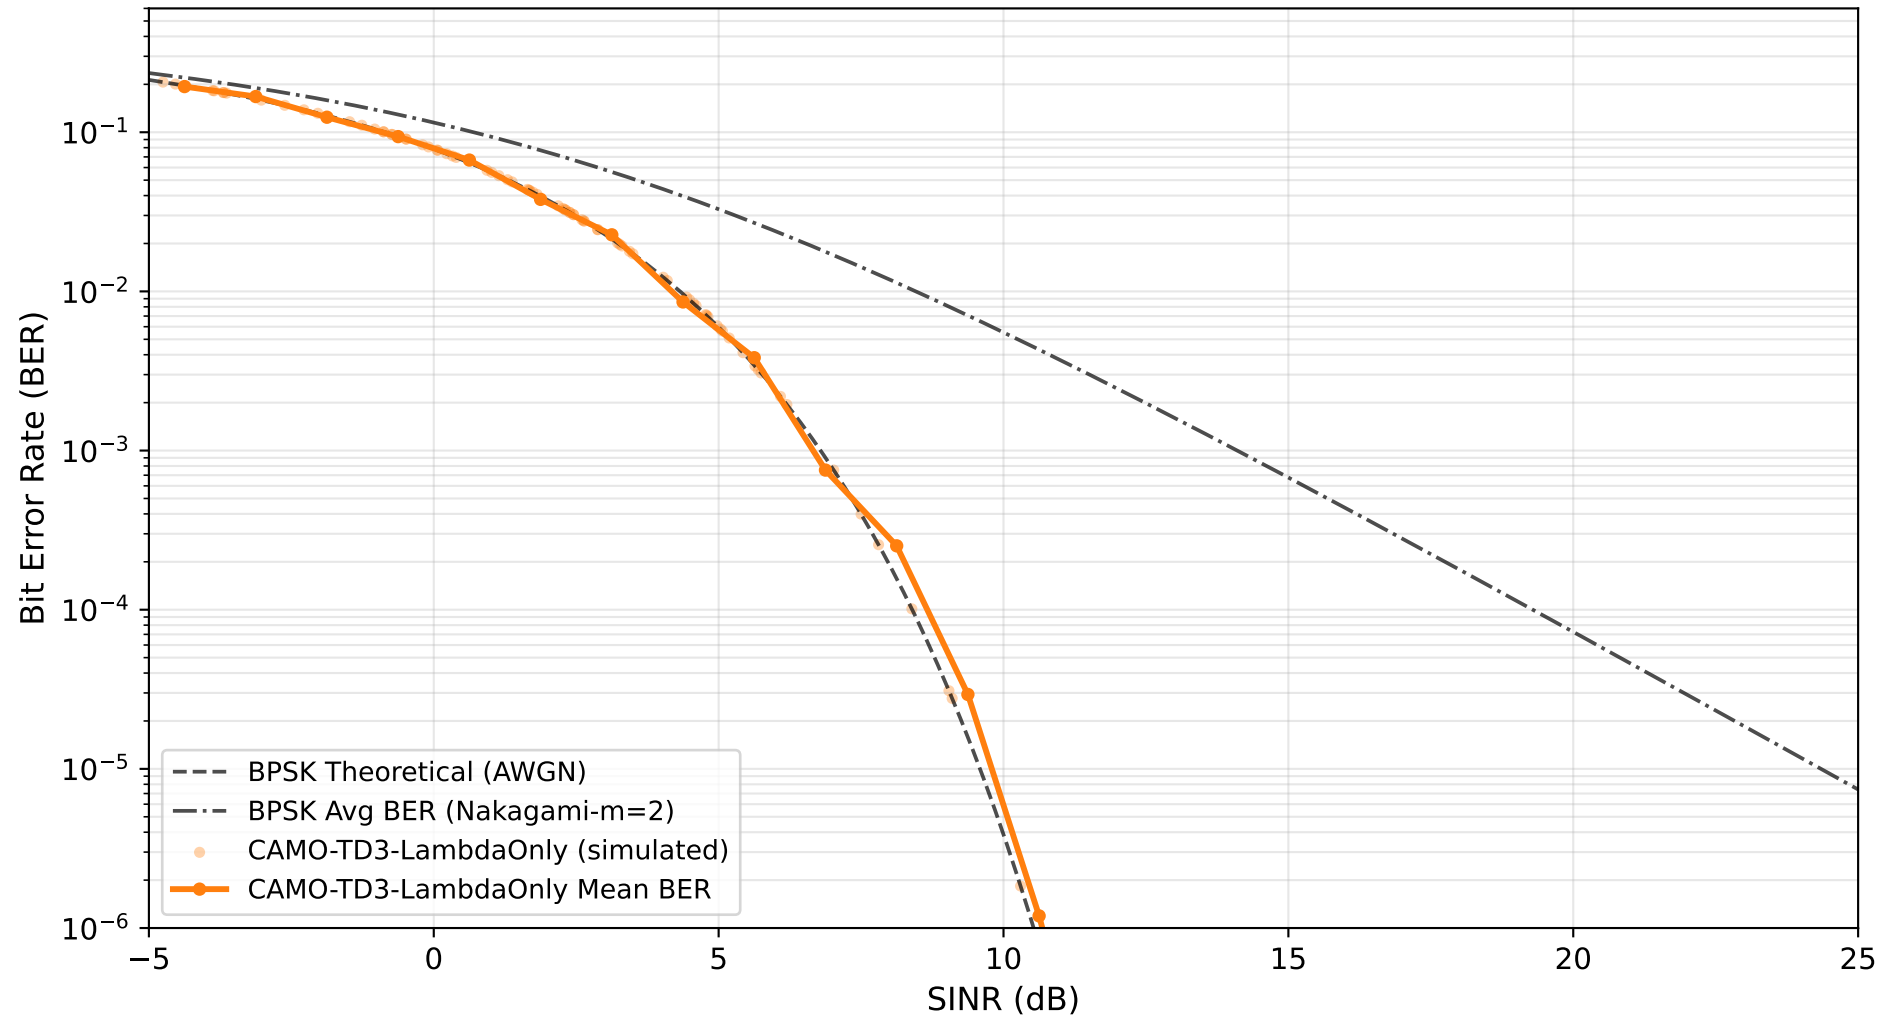


Primary User SINR vs BER - Nakagami-m=2 Fading Channel
(BPSK Modulation | Effect of SU Interference)

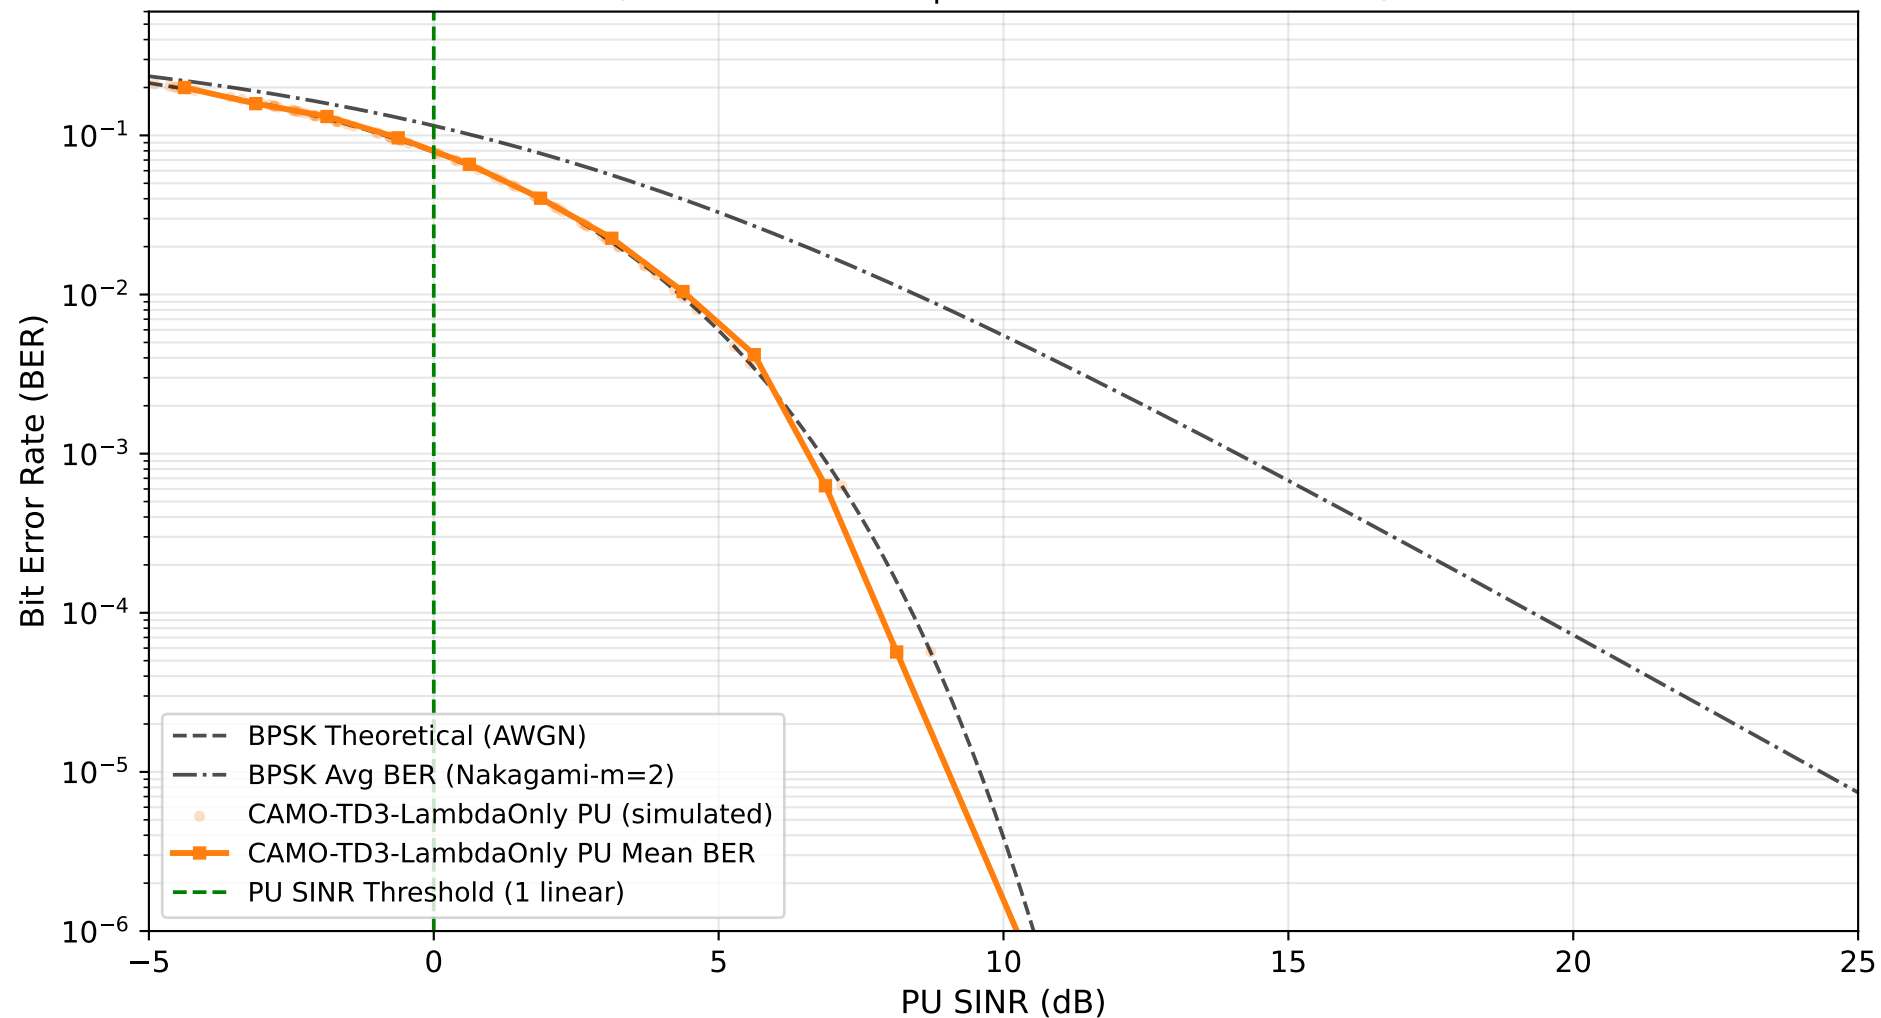


Secondary User (SU) Throughput vs Episodes

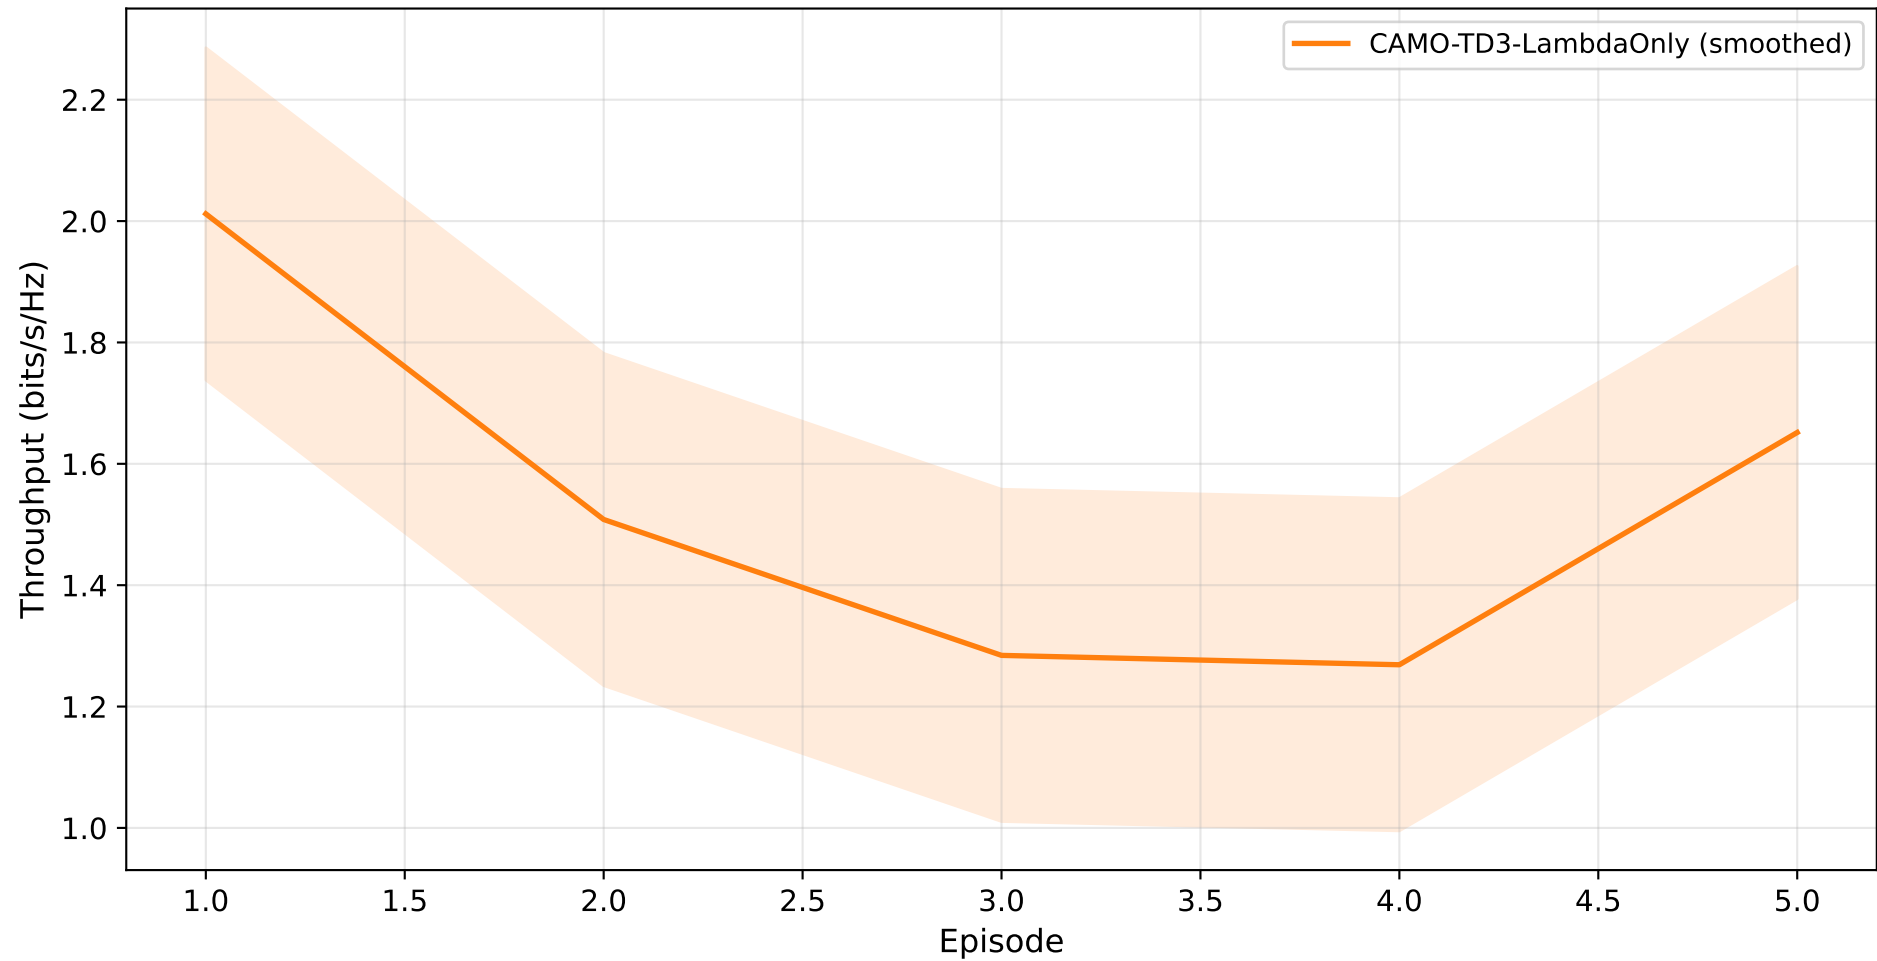



Primary User (PU) Throughput vs Episodes

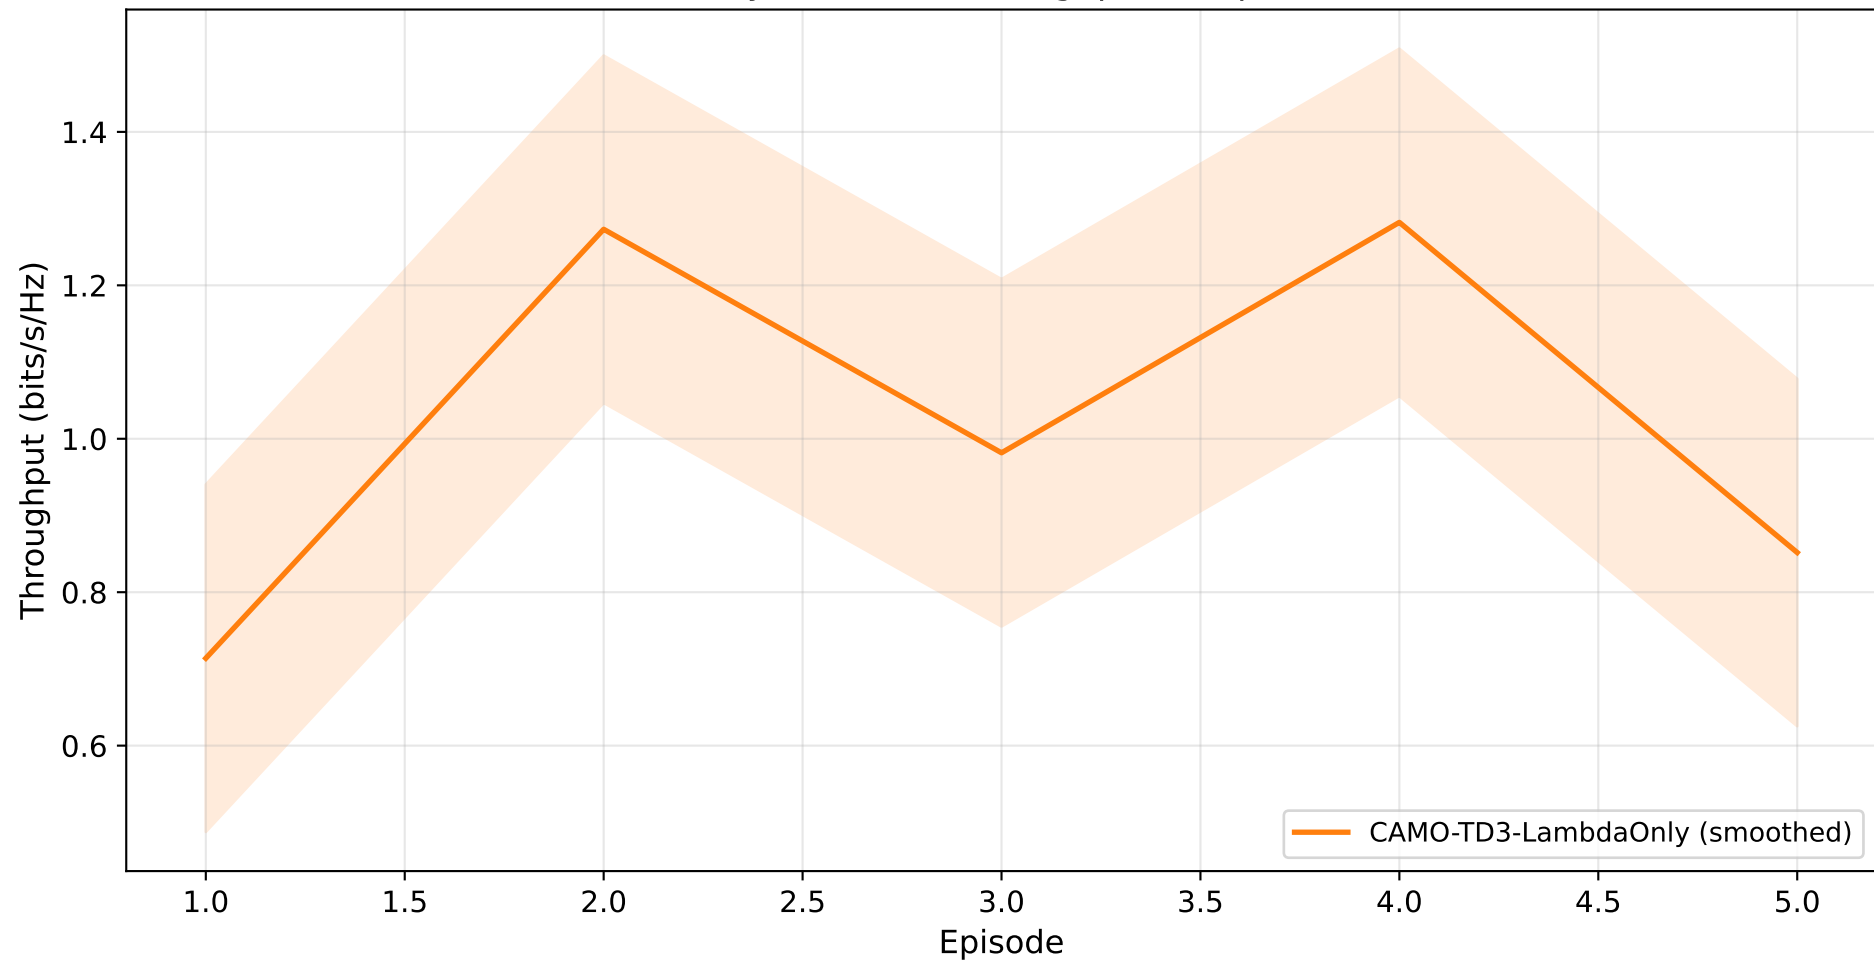

Outage Probability vs Episodes
(SINR_s < 1.0 threshold, rolling per episode)

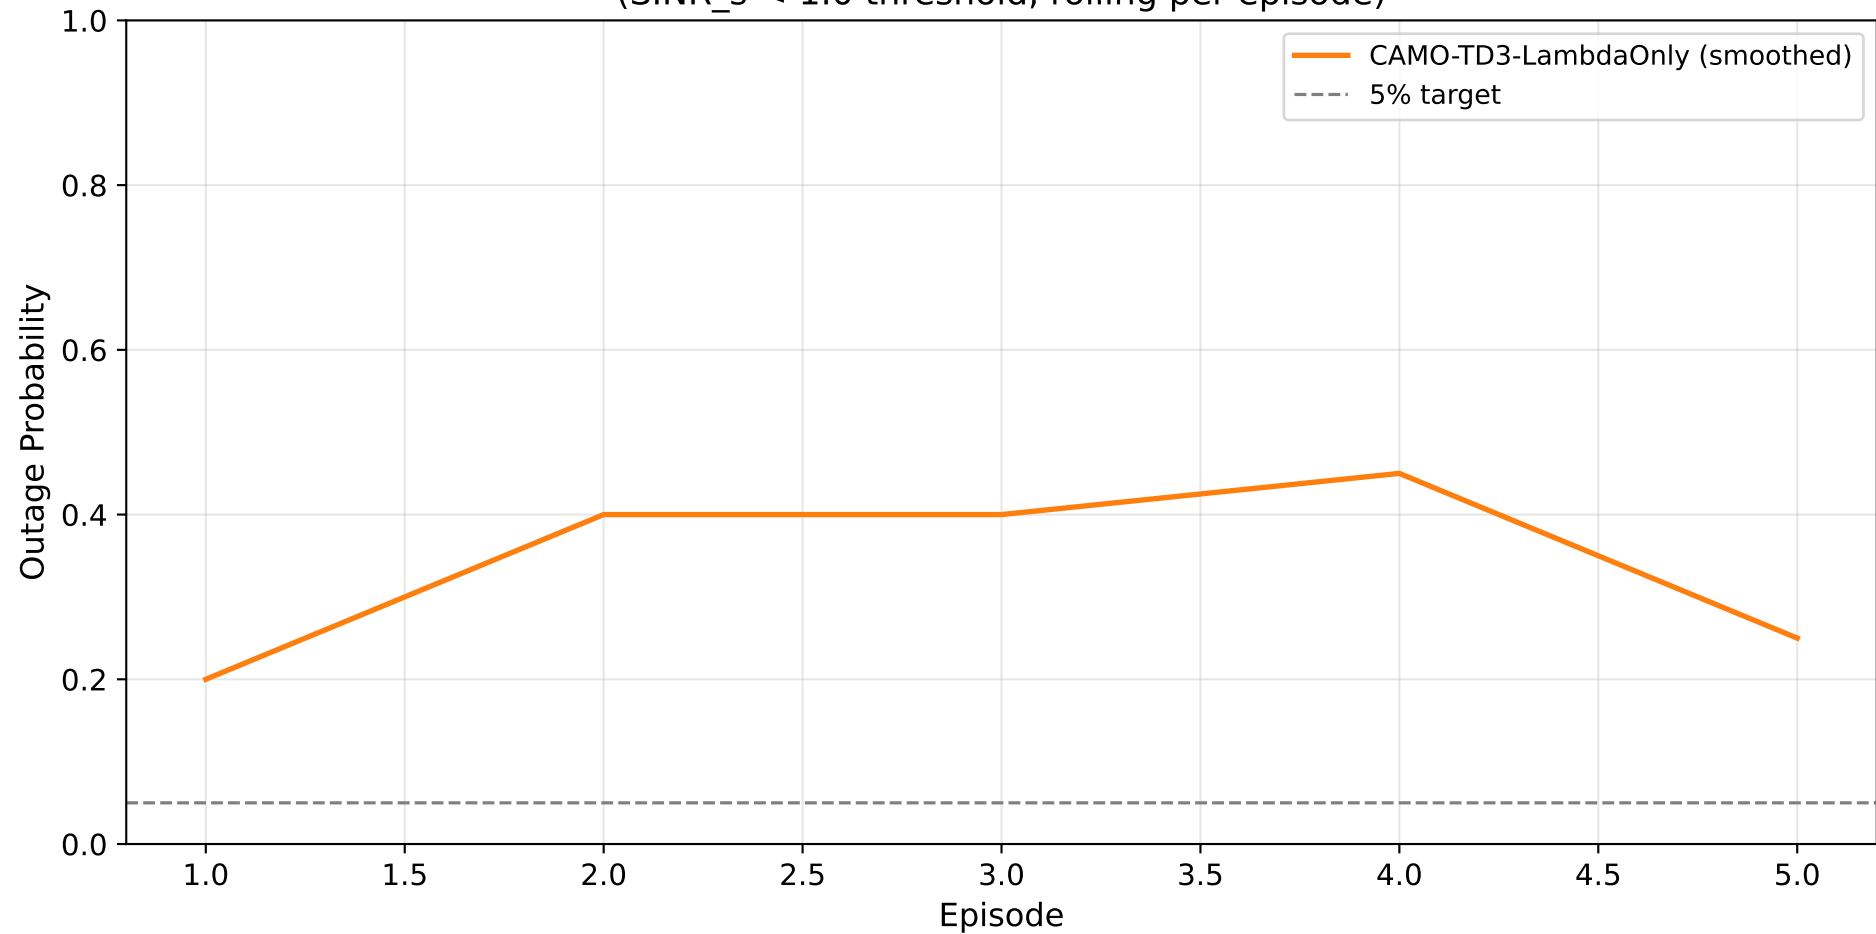


Outage Probability vs SINR Threshold (Empirical CDF) — Imperfect CSI

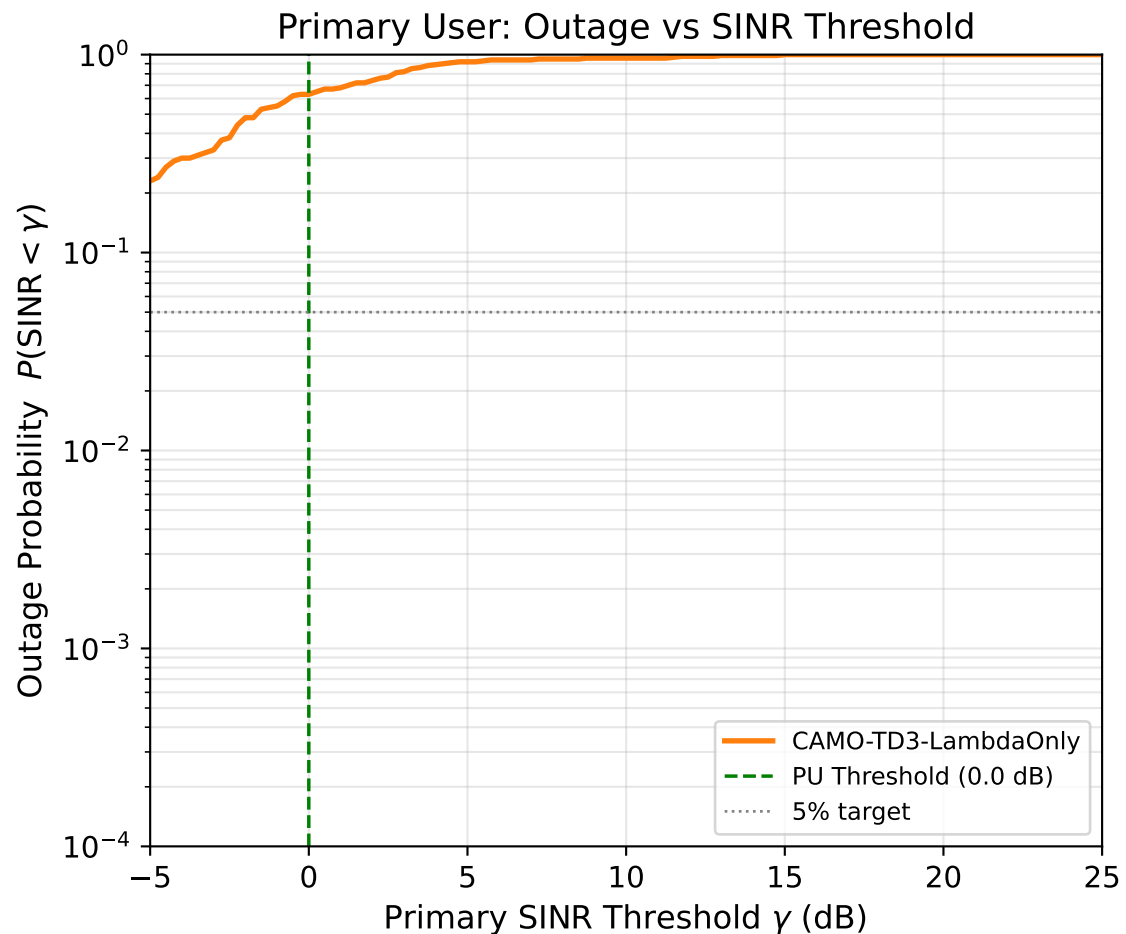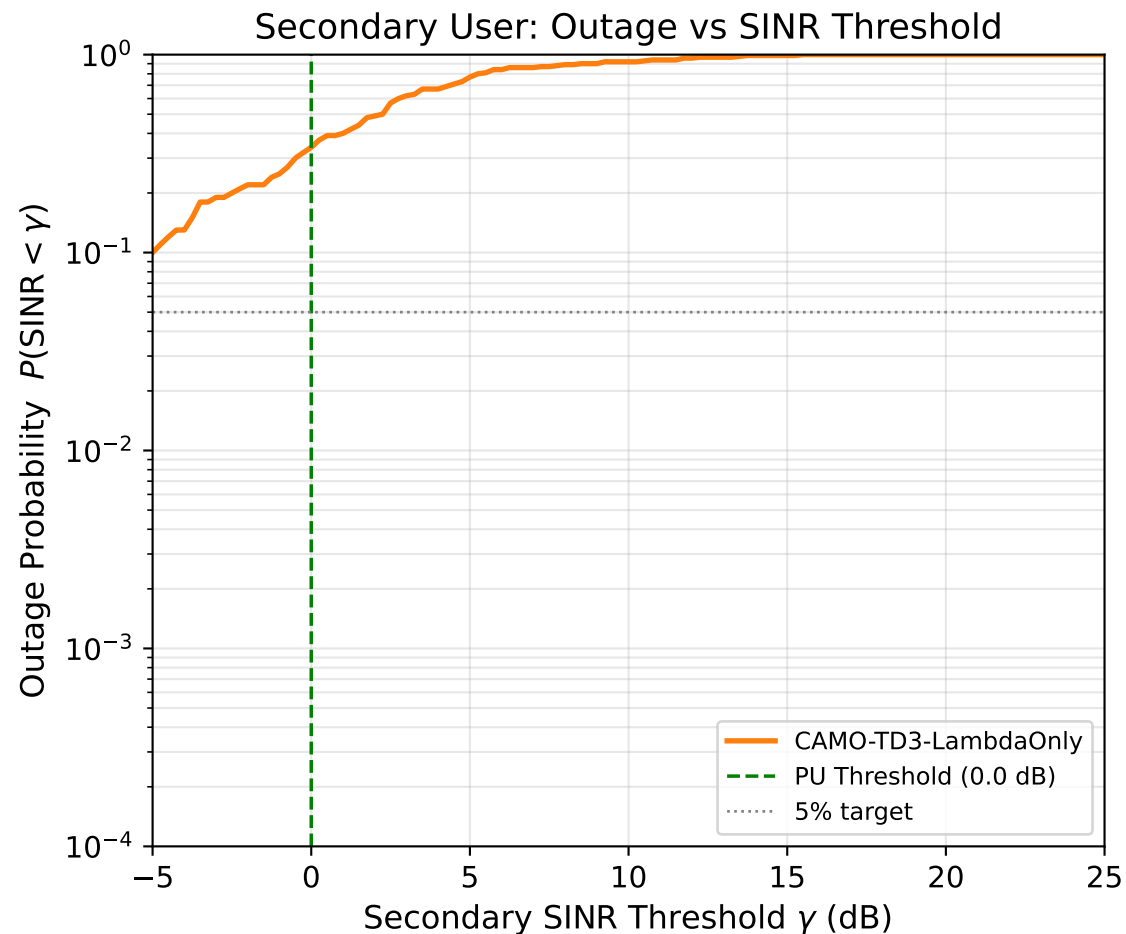


BER vs SINR — Algorithm Comparison under Imperfect CSI


Secondary User: BER vs SINR

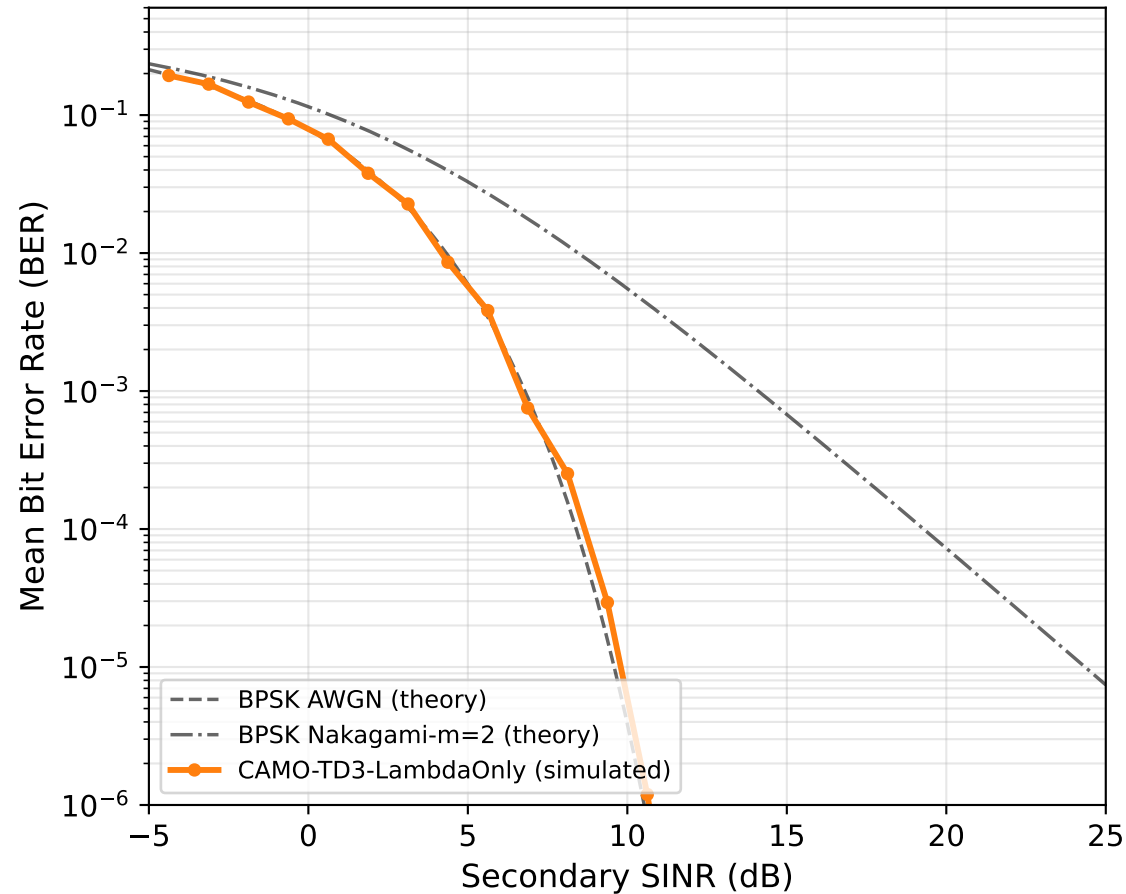

Primary User: BER vs SINR

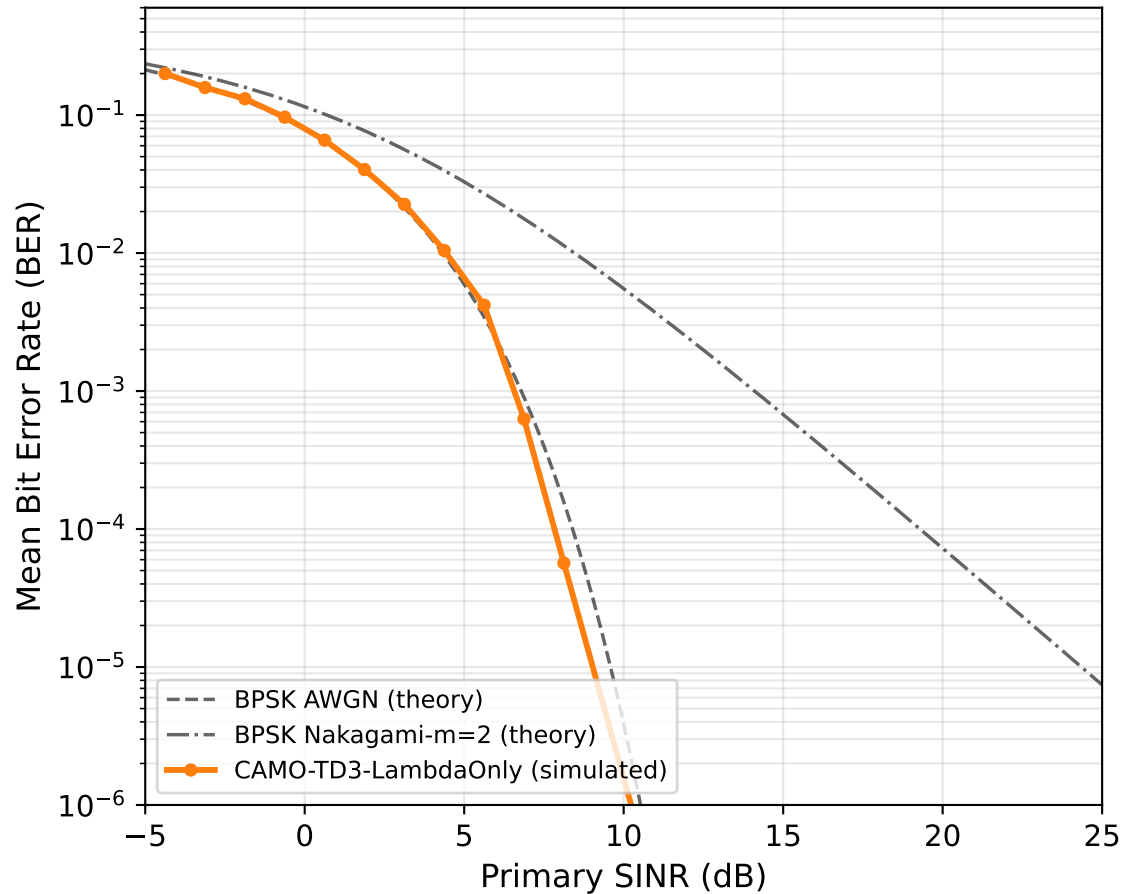

Episode Reward Curves - CAMO-TD3-LambdaOnly

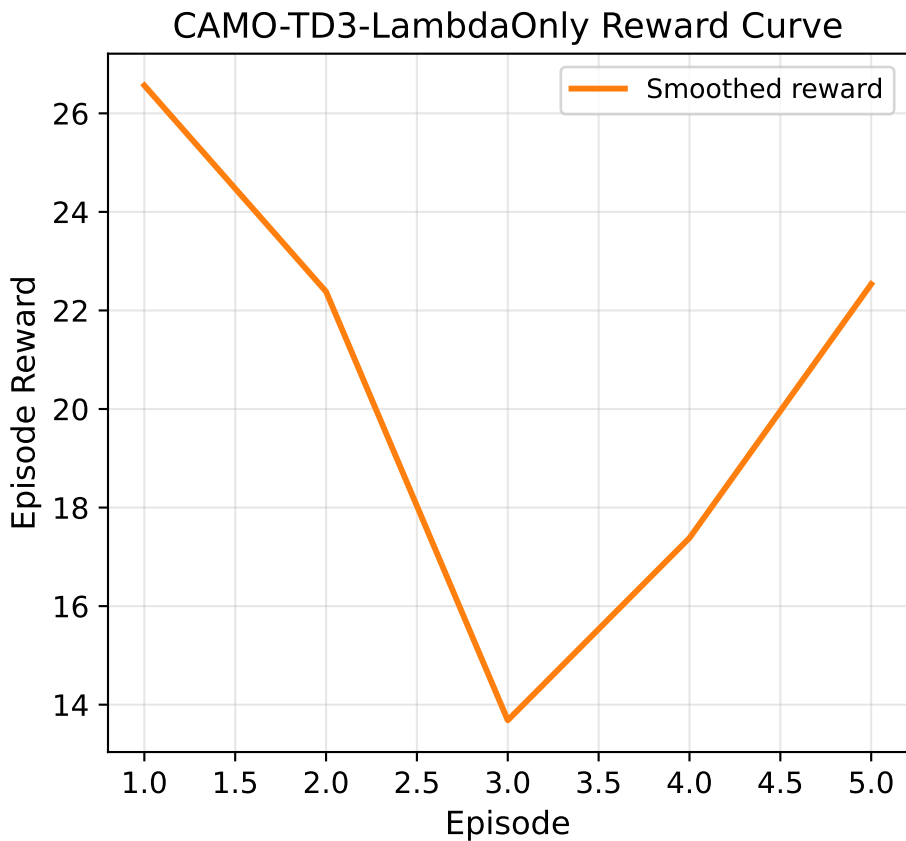

CAMO-TD3-LambdaOnly - Reward Comparison

