



SECTION D-D scale 1.75 : 1

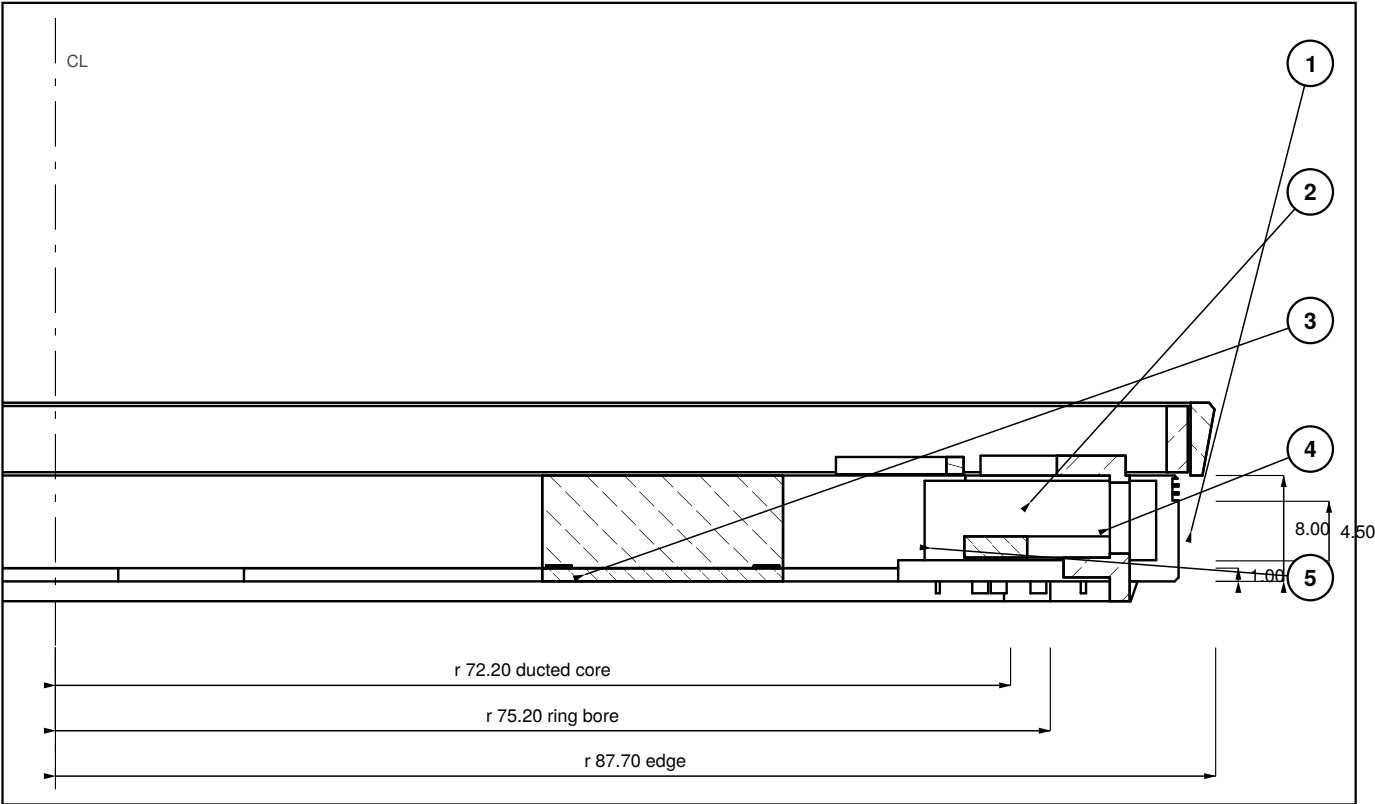


Right half, on the 0 deg - 180 deg axis, through the port face. The base is three parts: the machined core, the ring round it and the closing plate under it.

PLAN AT z 7.5 - THE CORE'S TOP FACE scale 0.55 : 1

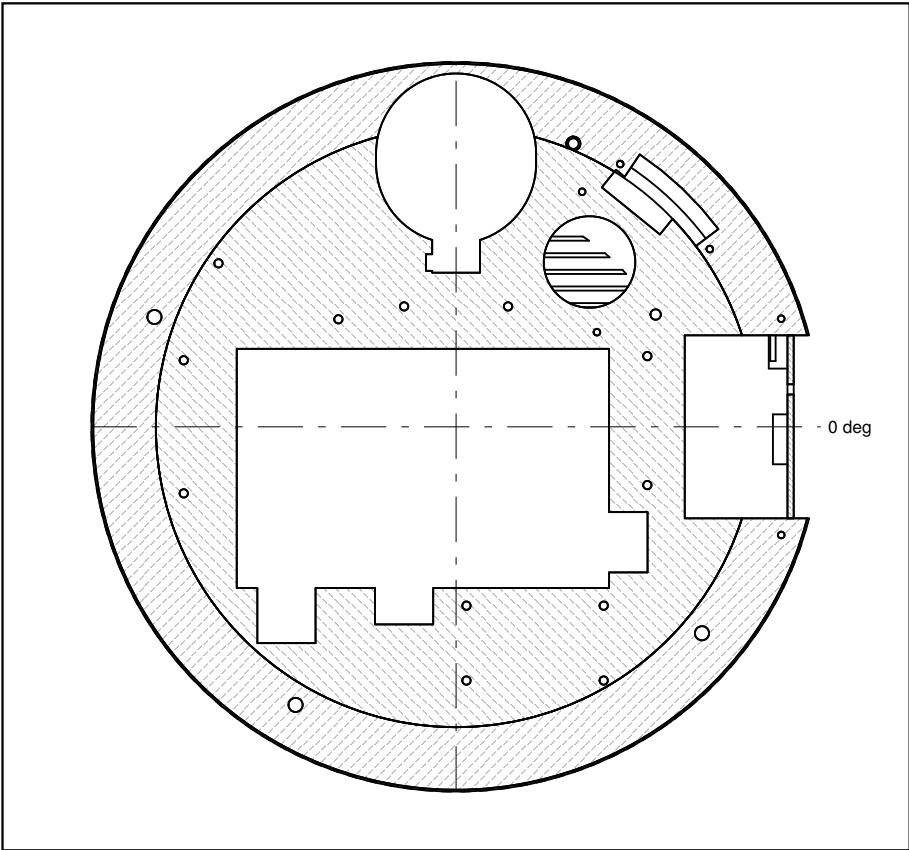

Three through-cuts: the Pi window, the carriage hole at 90 deg, the port slot at 0 deg.
Each keeps 2.5 of solid wall so the duct cannot leak into it. Ring bore r 75.2, duct ends r 72.2.
Ribs on this face stand 6.0 tall and carry the boards.

PLAN AT z 3.8 - THROUGH THE VENTS scale 0.55 : 1

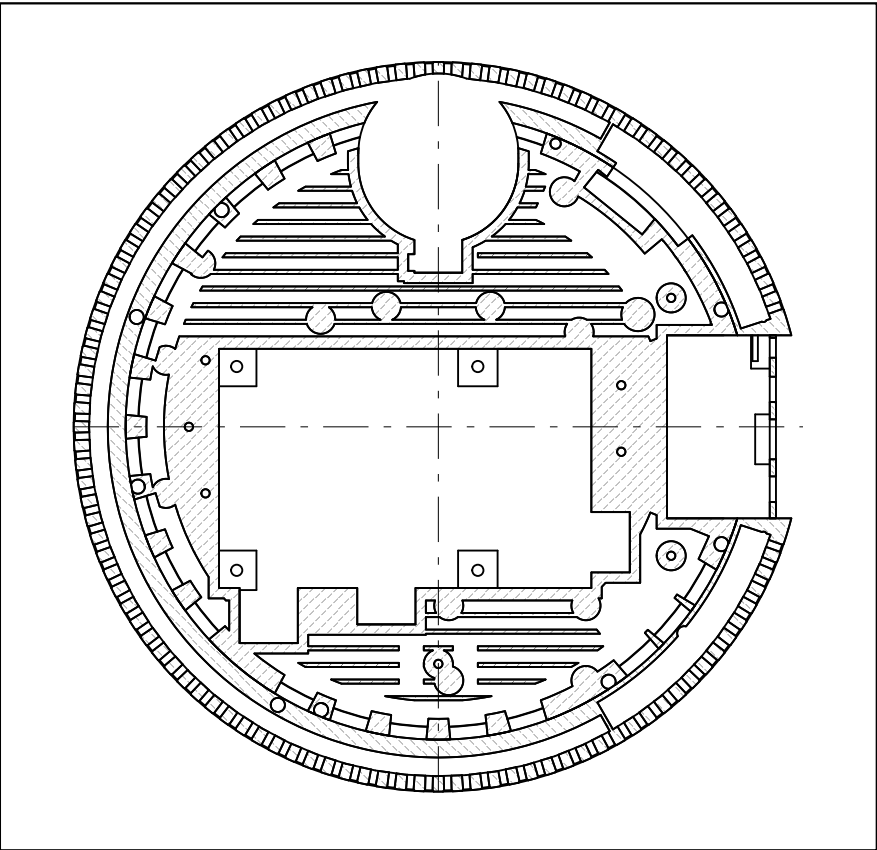


The openings run all the way round except where the port slot and the ring's own screw bosses interrupt them. Air crosses the inner land through 24 intake and 3 exhaust passages - that circuit is D05.

NOTES


- 1 Rim ring, r 75.2 - 87.7 x 8.0 deep, machined stainless. stainless 304 or 316, bare. The outer wall r 84.0 - 87.7 carries the vent openings, 1.8 x 4.5 obround on a 120-position ring, each with a 0.3 x 45 deg polished chamfer at the mouth; the parts list records 108 open once the ring screws and the port slot have taken their share.
- 2 Core, r under 75.2, CNC 6082 aluminium: 2.0 web, 5.0 duct, ribs 6.0 tall on the top face.
- 3 Closing plate: 1 mm laser-cut aluminium, r under 72.2, 9 x M2.5 countersunk from below, flush in the core's recess on a 0.2 gasket. Unscrew it to clean the duct - it is the only way in.
- 4 Port face at r 79.7, 1.5 thick, carrying USB-C, a 3.5 mm jack, the barrel jack and the ambient-light sensor looking rearward through a dia 4.8 hole. The port slot through the core is 44.0 wide, from r 55.0 out to the rim.
- 5 The edge the user sees is the ring, not the core: the ring's outer face is brushed axially and left bare, and every external face of the core is black hard anodised. No masked pads anywhere - internal faces are chromate or bare, so the finish line is a whole face, not a patch.
- 6 The ring is the mass at the largest radius and the structure the vents pass through, so its section is set by the openings, not by stiffness. Plate screws from below at 160 deg / 240 deg / 320 deg, into pillars on the wall.

DETAIL S - RIM RING WALL 9 : 1

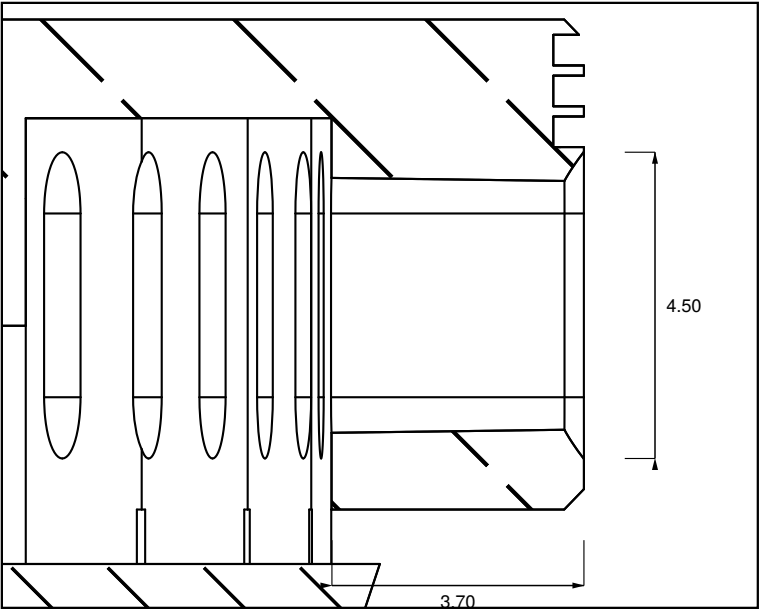

The openings pass through the 3.7 outer wall on 3 deg, into an underside groove that the pad closes. The 0.8 undercut under the wall is what lets the groove be machined without breaking through the visible face.

RIM RING - ISOMETRIC 0.50 : 1

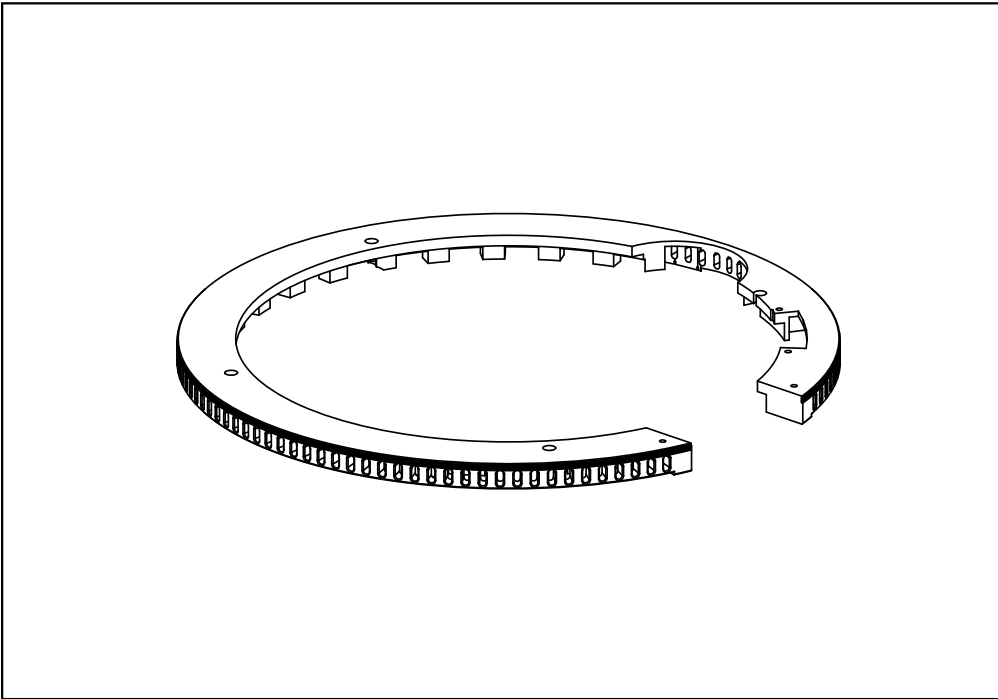

The ring on its own, as machined. Every opening in the outer wall is on 3 deg to the radius, so the eye sees a fine louvre rather than a row of holes. Finish: bare stainless - edge brushed axially, every opening mouth and both edges polished.

BASE - ALUMINIUM CORE, STAINLESS RIM RING, PORT FACE

the 60 (Cadrane) — desk dial	DRAWING 60-15-D04	REV v15
SCALE AS SHOWN	DATE 2026-09-07	UNITS mm