



SECTION C–C scale 2.0 : 1

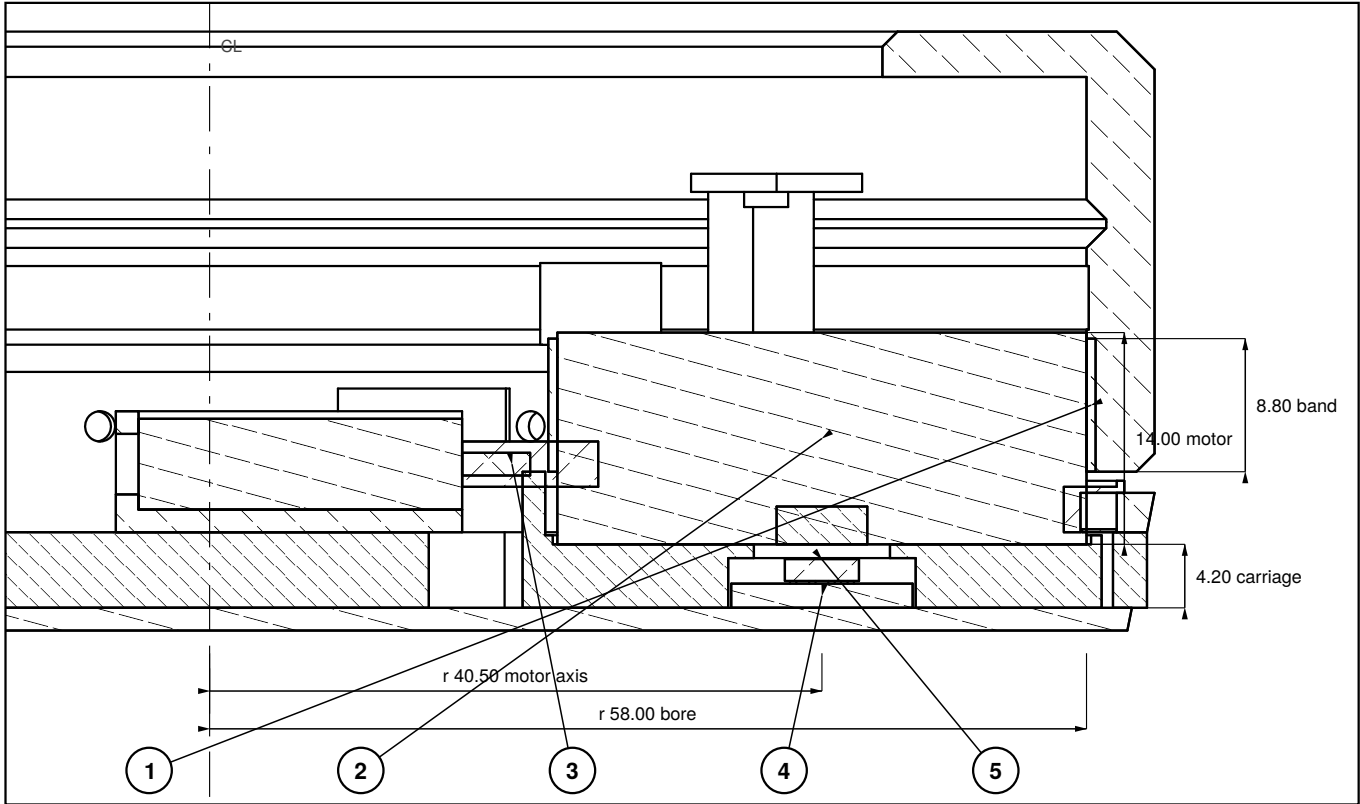


On the 90°–270° axis, clutch ENGAGED. Right of the centreline is the motor at 90°; the servo's inboard end crosses the centreline.

PLAN AT z 2.5 — INSIDE THE PLATE scale 0.78 : 1

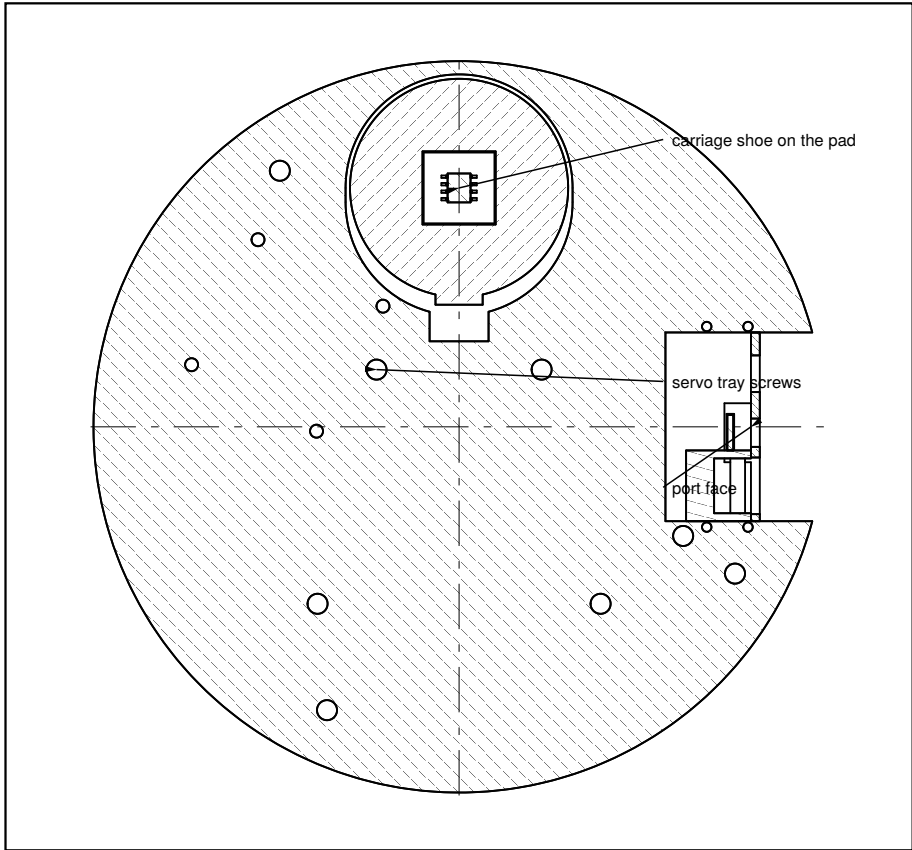

The stadium hole is the two carriage positions plus the slot between them: Ø38.5 wide, r 18.9–59.8 at 90°, with a 10 × 10 tab slot reaching in to r 14.5.
The carriage rides on the pad, not on the plate.

PLAN AT z 13.4 — THE DRIVE BAND scale 0.78 : 1

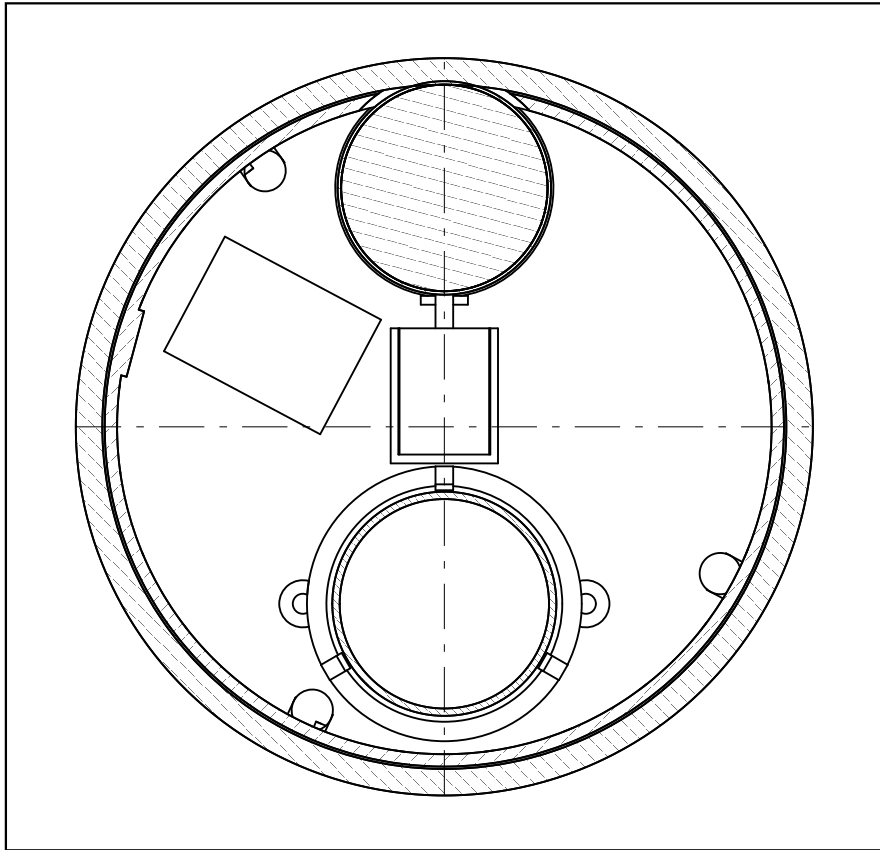


Contact is a line at 90°, at r 58.00. Everything else on this level — driver board at 152°, speaker, servo tray — stays outside the bell.
The wall relief is cut for the bell, 2.0 a side; the base below z 8.5 is narrower.

NOTES


- 1 The drive is friction, not gears: a Ø35 motor bell running on the Ø116 bore through a 0.60 flat silicone band. Ratio 3.31 : 1. v8's gimbal drive and its over-centre clutch are both gone.
- 2 JD-Power MY-3514C (2804), Ø35 × 14, on a carriage that slides radially in a stadium hole through the plate. The carriage shoe is Ø37 on the pad, so the motor's base face is at z 4.2 and its top at z 18.2.
- 3 The clutch IS the servo. An AGFRC C1.5CLS PRO linear servo (21.4 × 15.2 × 6 envelope) pushes the carriage tab directly; 2.40 of travel takes the bell from contact to 2.40 clear. Preload — 2.4 N nominal — is a servo position set in software, not a spring.
- 4 Commutation: an MT6701 on a 12 × 12 board inside the carriage, under the motor, reading a Ø6 × 2.5 diametric magnet in the shaft's lower end through a Ø9 sight hole. Which end of the shaft carries the magnet is ASSUMED. If it is the top, this board moves and the display rises about 3 mm — over the 40 mm height limit the specification sets, against 39.6 as modelled.
- 5 Not drawn, because nothing published says: the motor's bolt pattern (the carriage has a Ø35.6 locating rim only), the servo's mounting lugs, and the pushrod-to-tab joint. Measure all three on the real parts before printing the carriage or the servo mount.
- 6 Band grip at 2.4 N is untested. If it slips under a firm hand, the fallback is a 2 : 1 bell-crank between the servo and the tab — that doubles the force and halves the travel, so the stadium hole would grow.

DETAIL R — THE CLUTCH 4 : 1

ENGAGED

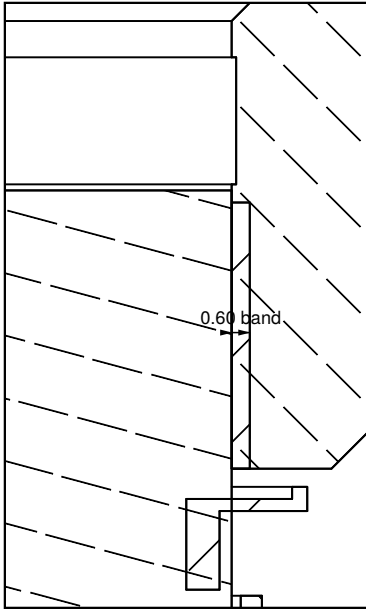


RELEASED

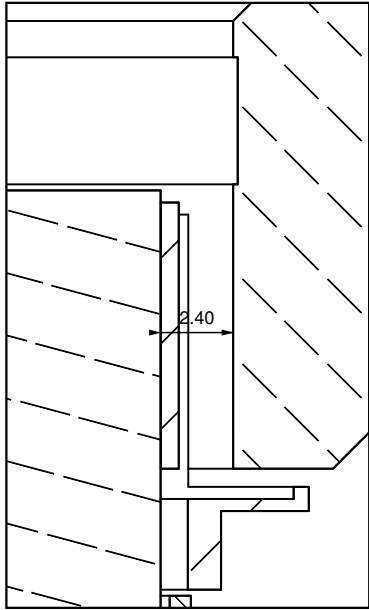

Same section, same scale, 2.40 apart. Engaged, the band is squeezed 0.60 between bell and bore. Released, the bell stands 2.40 clear and the knob free-spins.
The knob is never released by the wheels — only by the drive.

CARRIAGE AND SERVO TRAY — ISOMETRIC 1.9 : 1

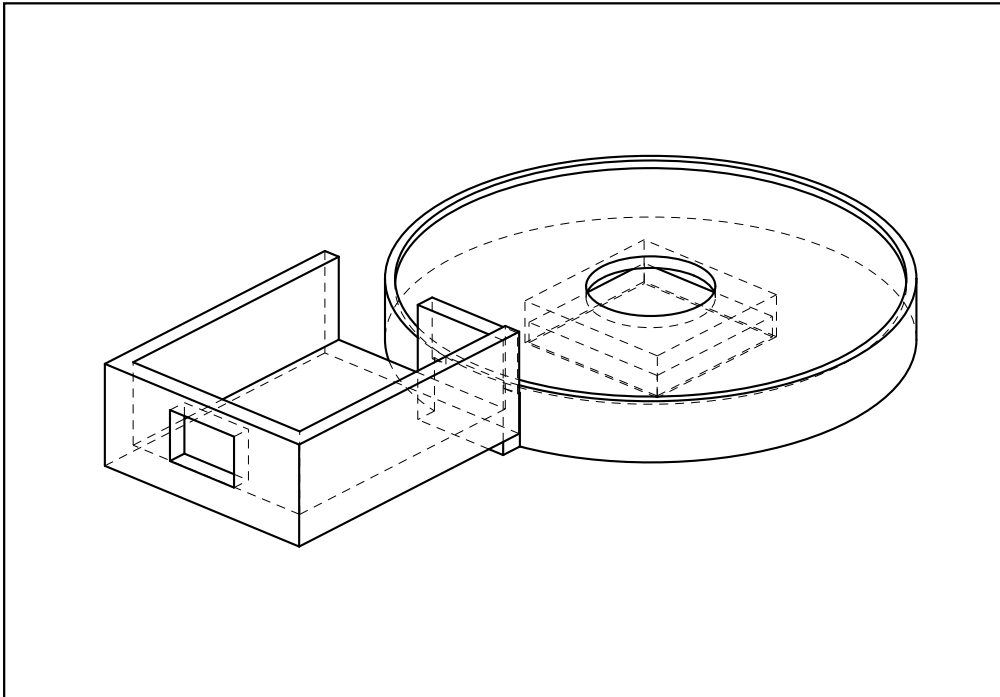

The two printed parts of the drive, with the commutation board in its pocket. Motor and servo are left off: their envelopes hide everything that has to be made. Assembly: board into the carriage, motor on top, band over the bell, servo into the tray, tray on the plate, then set the preload in software.

DRIVE AND CLUTCH — CARRIAGE, MOTOR, BAND, SERVO

the 60 (Cadrane) — desk dial	DRAWING 60-09-D03	REV v9
SCALE AS SHOWN	DATE 2026-09-04	UNITS mm