



THE PLATE — HORIZONTAL SECTION AT z 2.5 scale 1 : 1

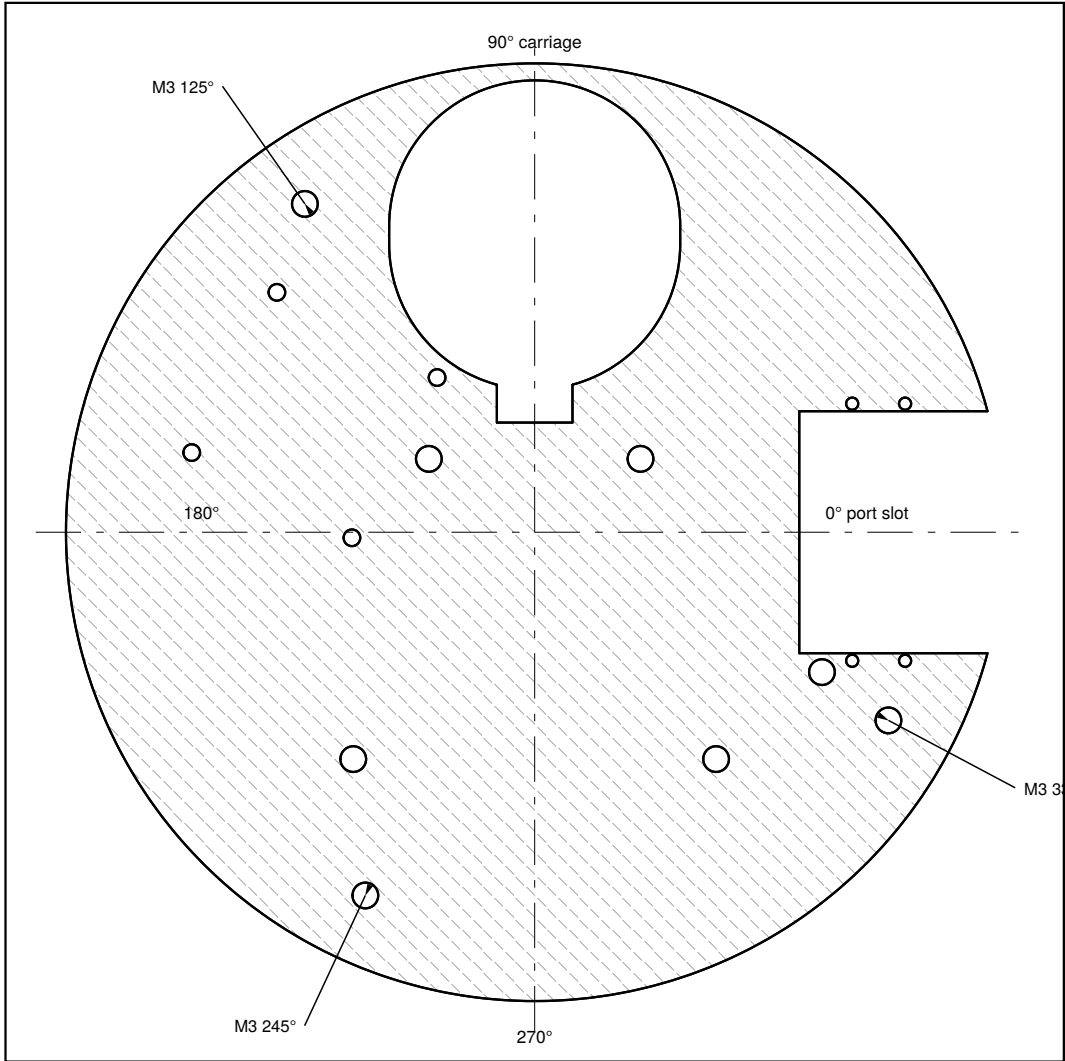


Ø124 × 5 laser-cut steel, about 385 g. Countersinks are on the underside — this view is from above. The plate is the mass, the ground plane and the halo's bottom edge. v8's Ø123 × 3 printed plate is gone.

SECTION D-D — THE BACK 1.5 : 1

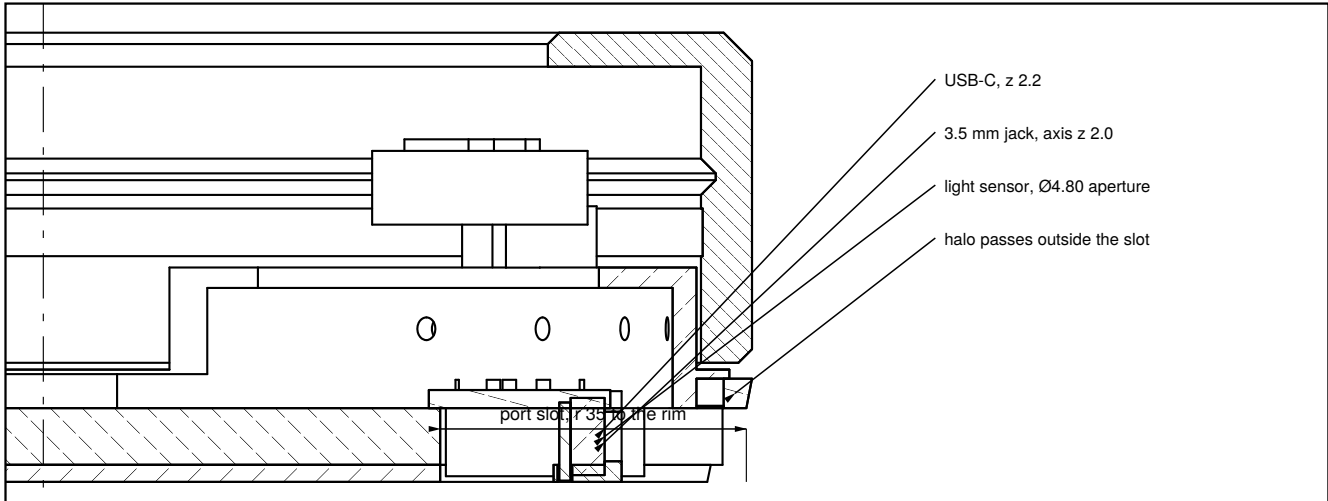


Section on the 0°–180° axis, right half. Nothing in the port slot reaches past r 51, and the halo sits at r 60.0–62.5, so the light band runs over the back unbroken. The plug envelopes are ASSUMED: 12 × 6.5 × 12 for the right-angle cable outside, 10 × 6.5 × 19 for the internal straight plug.

THE FLOOR — HORIZONTAL SECTION AT z 8.0 scale 1 : 1

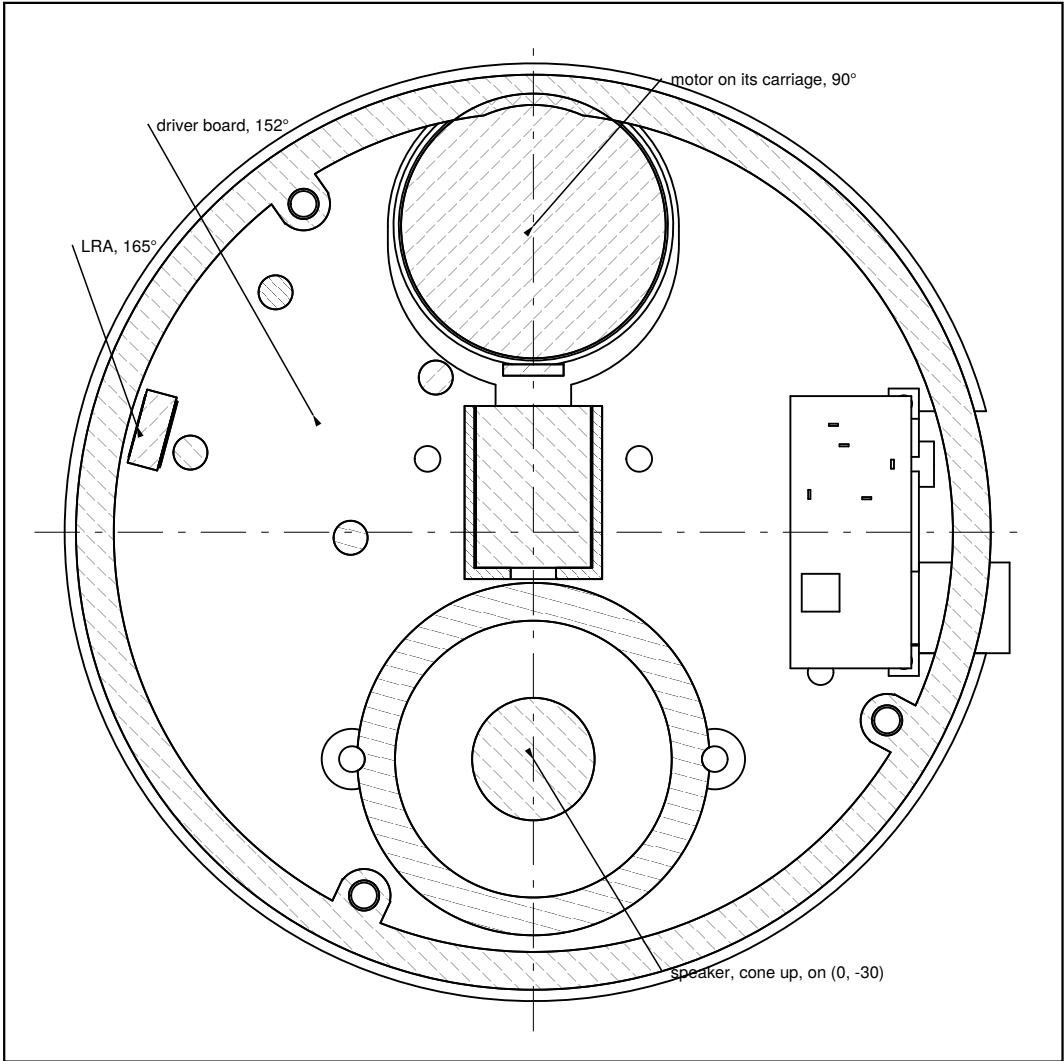

Perimeter ports Ø2.0 at z 12.0 on a 15° grid: 20 of the 24 positions are drilled, 4 fall in the motor cut-out. The speaker breathes into the cavity and out through them. Nothing fires down into the plate.

DETAIL S — THE PORT FACE 4 : 1

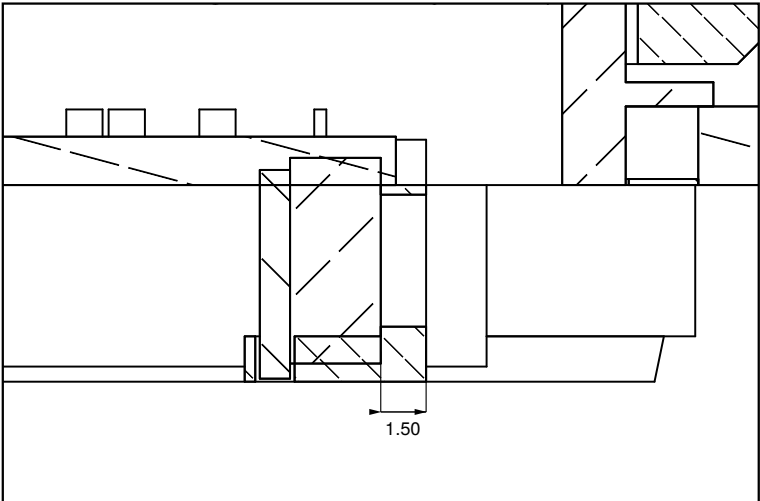

Printed face 1.50 thick at r 49.5, on two M2 ears. Face positions: USB-C -10, sensor -1, jack +9.

NOTES

- 1 Plate: Ø124 × 5 steel, the heaviest part of the device and its ground plane. Its rim at r 62.0 is the bottom edge of the halo.
- 2 Two big cut-outs: the carriage stadium at 90° (Ø38.5 over r 18.9–59.8, plus a tab slot inboard) and the port slot at 0° (32 wide, r 35 to the rim).
- 3 Fixings, all countersunk or tapped from below: 3 × M3 at 125° / 245° / 332° on r 53 into inserts in the structure; 2 × M3 speaker cradle; 2 × M3 servo tray; 4 × M2 driver board; 2 × M2 port-face ears; 2 × M2 jack board; and one M3 ground bond beside the slot.
- 4 The port slot carries three things on two small boards: USB-C on a horizontal board at z 2.2; the 3.5 mm jack hanging UNDER a board at z 5.0, so its body sits at z –1 to 5, below the halo; and the light sensor on a small vertical board looking rearward through a Ø4.80 hole in the face. One board could not put both axes at z 2.
- 5 The speaker stands cone-UP on its rear boss at (0, -30), breathing into the cavity and out through the perimeter ports. v8's down-firing speaker had nowhere to fire once the plate went solid.
- 6 Pad: Ø122 at the top tapering to Ø121.4, 1.5 thick, notched at the port slot. The carriage stands on the pad through the plate, so pad thickness is part of the drive geometry, not just a foot.

BASE PLATE AND FLOOR — CUT-OUTS, FIXINGS, PORTS

the 60 (Cadrane) — desk dial	DRAWING 60-09-D04	REV v9
SCALE AS SHOWN	DATE 2026-09-04	UNITS mm