

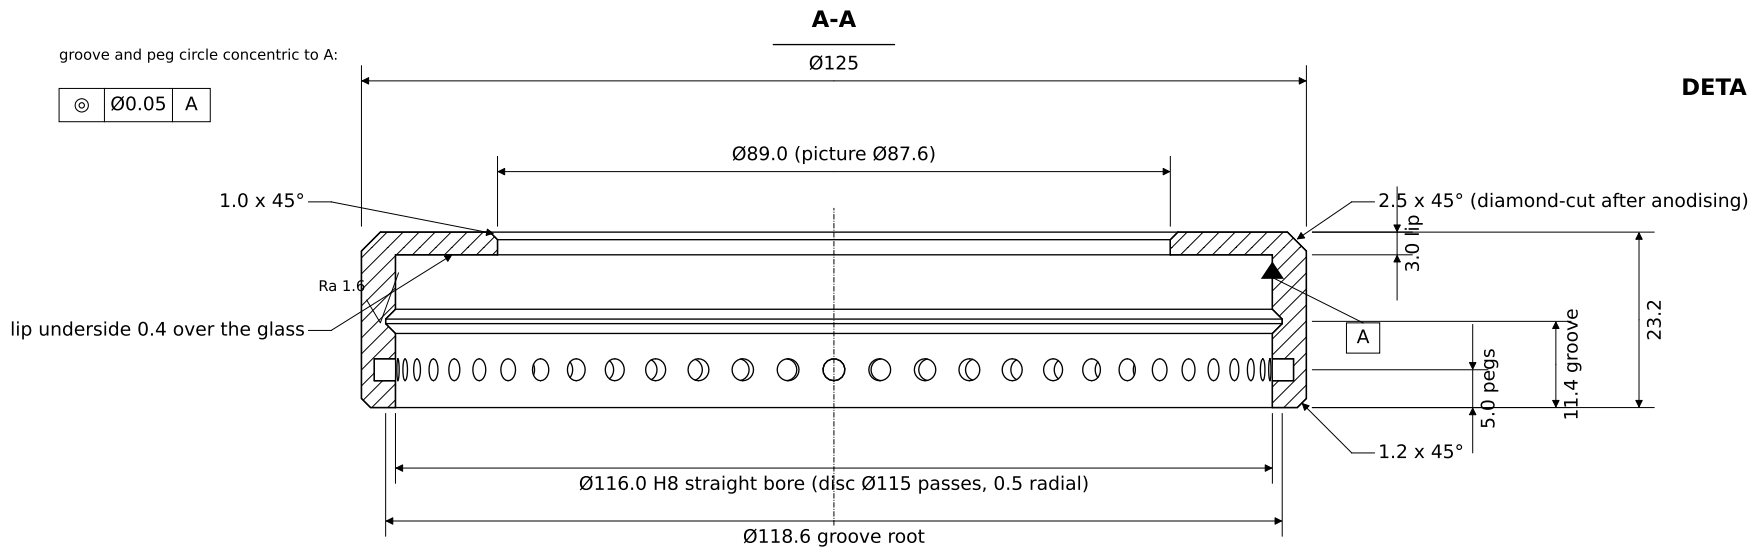


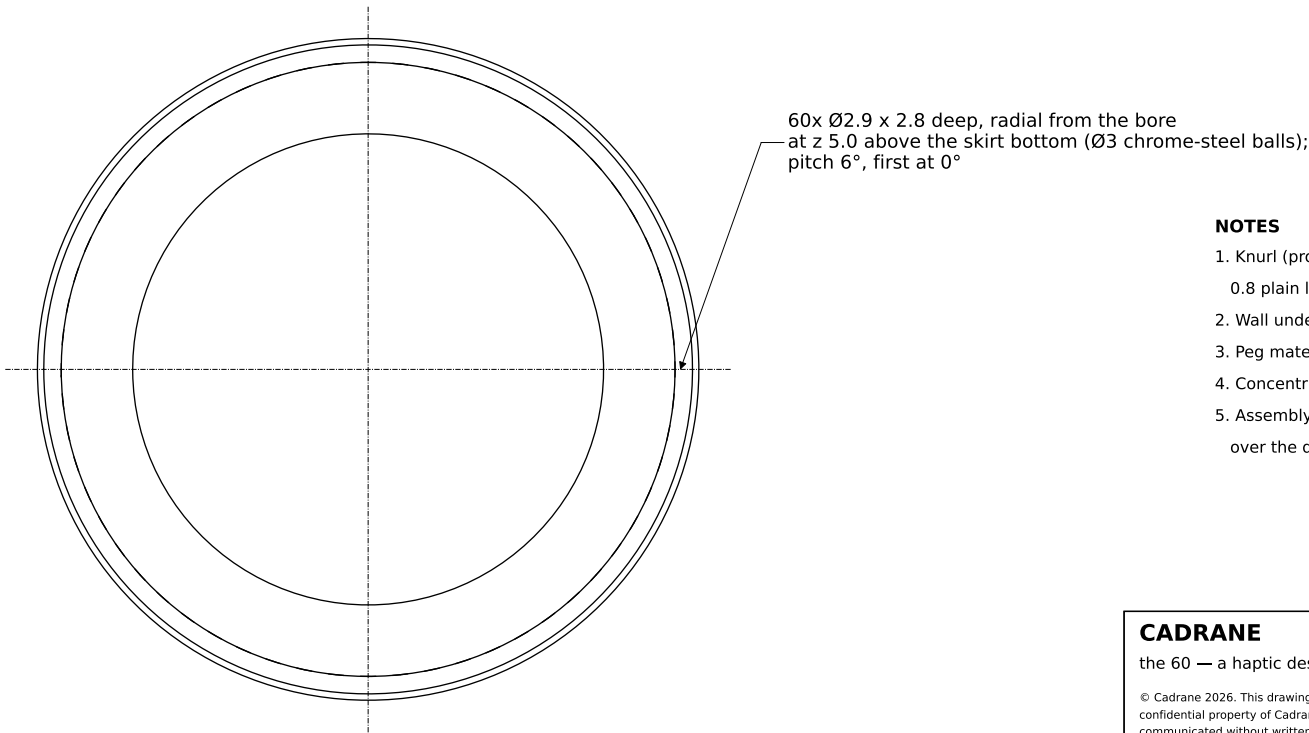


DETAIL B (3:1) — V-groove, pegs, bore bands

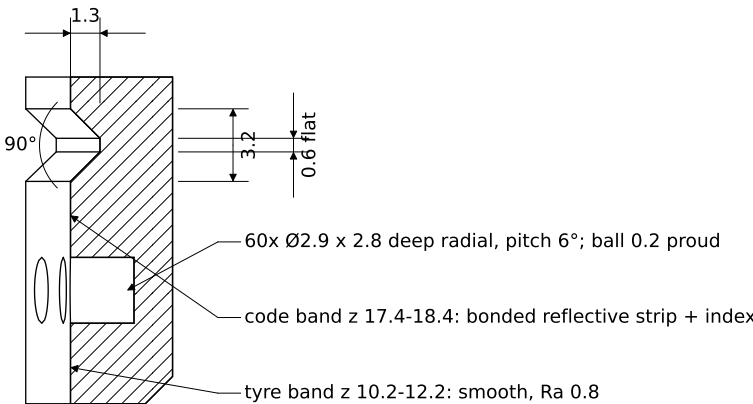

VIEW FROM BELOW

NOTES

- Knurl (prototype): 56 diamond, 1.0 deep, 30° helix, from z 2.0 to 19.9 above the skirt bottom, 0.8 plain lands at each end. Production (CNC): RGE diamond 1.0 pitch, 0.3 deep, cut before anodising (ID research).
- Wall under the knurl root is 0.7 at the peg holes (proto); 1.4 on the CNC part.
- Peg material matters: chrome-steel balls or EN1A mild-steel studs; never hardened grub screws, never stainless.
- Concentricity of the groove and the peg circle to the bore: 0.05 total (±0.1 runout = ±15-20 % click ripple).
- Assembly: base complete, wheels **RETRACTED** (bushes turned in) -> display screwed to its posts -> knob lowered on over the display and the wheels -> bushes turned out from below to seat the wheels in the groove -> steel plate on.

CADRANE the 60 — a haptic desk dial © Cadrane 2026. This drawing and the design shown are the confidential property of Cadrane; not to be copied or communicated without written consent.				General tolerance ISO 2768-mK unless stated		 First angle		Scale: 1:1 / 3:1 Weight [g]: 62		
Material: PETG black (proto) / 6082 Al CNC (prod) Surface: Type III hardcoat, matt black; knurl per note; chamfers diamond-cut										
					Date	Name	Notes: Prototype prints TOP FACE DOWN, no supports. 60 x Ø3 steel balls pressed into the peg holes. Diamond knurl on the side (not drawn): see note 1.			
				Created	2026-09-02	Claude				
				Review		R. (Cadrane)				
A	v7 initial	2026-09-02	Claude	Post treatment: —						
Rev.	Change	Date	Name							
							Item: 60-07-04	Status PROTOTYPE	Format A3	
							Knob (one piece)	Stock: Ø130 x 28 Al	Sheet 1 / 1	