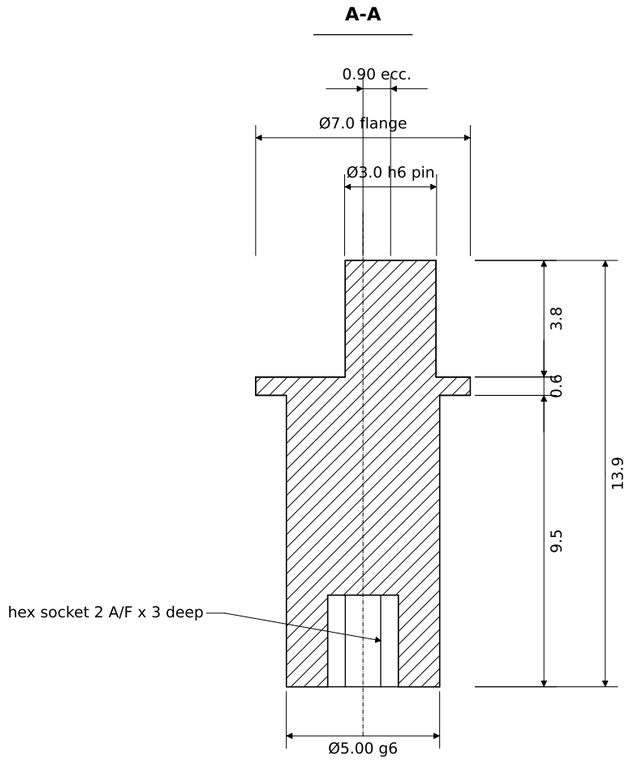

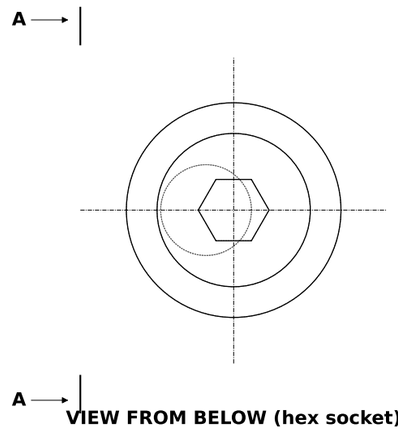

NOTES

1. Three bushes at 0°/120°/240° in the base shell's wheel posts (bore Ø5.1 at r 51.73); the flange rests on the post top.
2. Pin points OUTWARD to engage (wheel axis r 52.63); half a turn points it inward (r 50.83) so the collar clears the bore by 0.57.
3. Set from below with the steel plate off, then lock: M2 grub from the inside of the post (V) or a drop of thread-locker on the proto.
4. Production: brass, Ø3 h6 dowel pressed 4 deep. Prototype: PETG printed pin-up, 0.12 layers; expect to replace the pin with a steel dowel.

CADRANE

the 60 — a haptic desk dial

© Cadrane 2026. This drawing and the design shown are the confidential property of Cadrane; not to be copied or communicated without written consent.

General tolerance ISO 2768-mK unless stated

First angle

Scale: 5:1 Weight [g]: 1.9

Material: brass turned / PETG (proto)

Surface: as turned

Rev.	Change	Date	Name
A	v7 initial	2026-09-02	Claude

	Date	Name
Created	2026-09-02	Claude
Review		R. (Cadrane)

Post treatment: —

Notes:
Sits in the wheel post's Ø5.1 bore.
Half a turn with a 2 mm hex key from below moves the wheel 1.8 mm radially.

Item: 60-07-12

Status **PROTOTYPE**

Format A3

ECCENTRIC BUSH (x3)

Stock: Ø8 brass rod + Ø3 dowel

Sheet 1 / 1