

44 BOOT0 USB-C Connector NRST 7

STM32F4x1Cx v2.0+

Pinout Diagram

Legend

POWER

GROUND

CPU PIN

PIN NAME

CONTROL

ANALOG

TIMER & CHANNEL

USART

SPI / I2S

SDIO (F411 Only)

I2C

CAN BUS

USB

MISC


BOARD HARDWARE

5V Tolerant

3.3V (F411)

PWM Pin

Pin

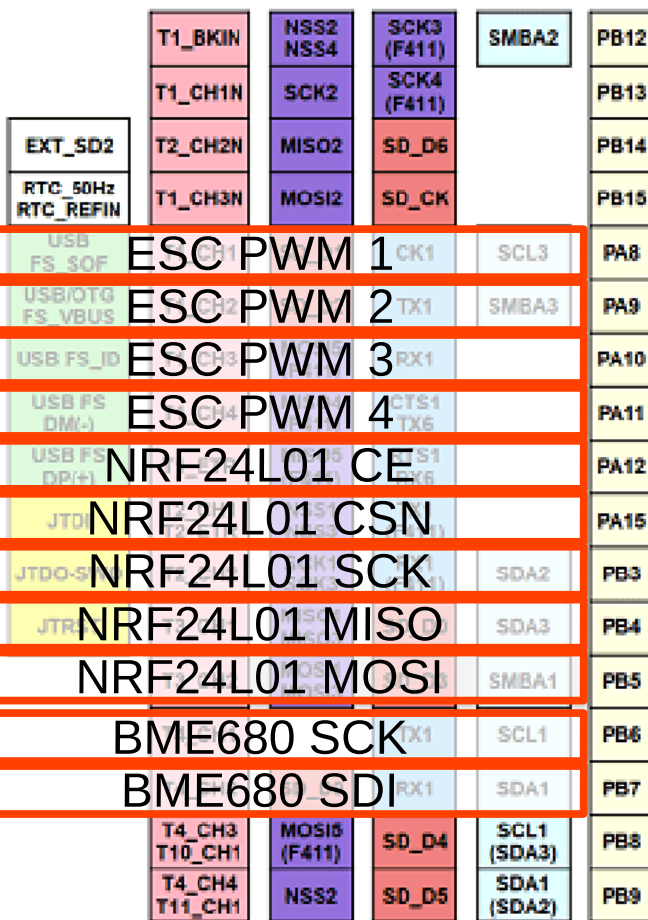

Notes:

TM6 & 7 are only used by DAC and don't have any pins

All pins are 5V tolerant on F401

Pins 10 and 41 on F411 are 3.3V only.

