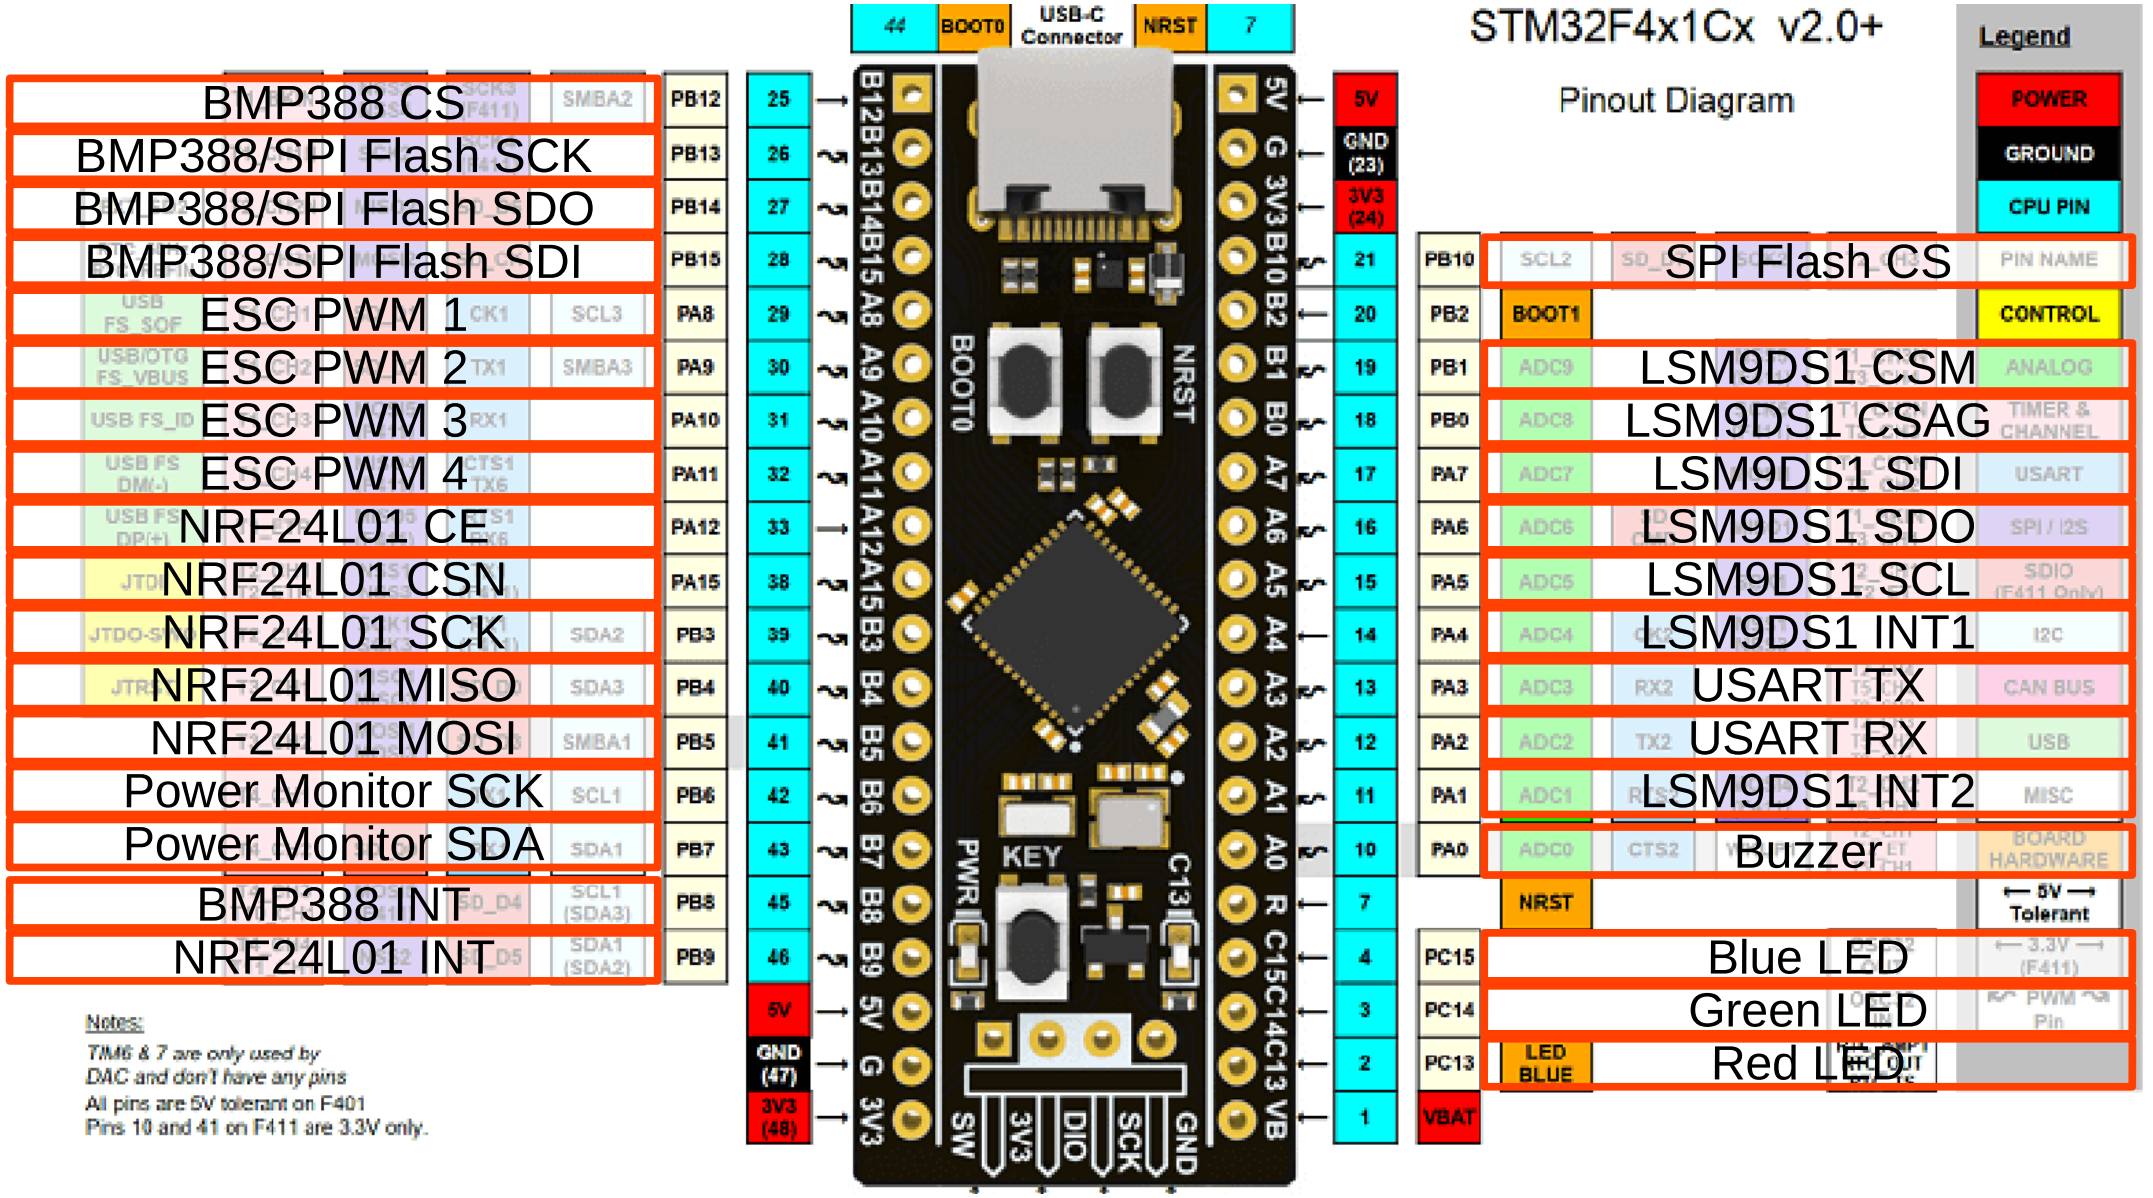

STM32F4x1Cx v2.0+
Pinout Diagram
Legend
POWER
GROUND
CPU PIN
PIN NAME
CONTROL
ANALOG
TIMER & CHANNEL
USART
SPI / I2S
SDIO (F411 Only)
I2C
CAN BUS
USB
MISC
BOARD HARDWARE
5V Tolerant
3.3V (F411)
PWM Pin
USB-C Connector
BOOT0
NRST
KEY
PWR
C13
SW
3V3
DIO
SCK
GND
BMP388 CS
BMP388/SPI Flash SCK
BMP388/SPI Flash SDO
BMP388/SPI Flash SDI
ESC PWM 1
ESC PWM 2
ESC PWM 3
ESC PWM 4
NRF24L01 CE
NRF24L01 CSN
NRF24L01 SCK
NRF24L01 MISO
NRF24L01 MOSI
Power Monitor SCK
Power Monitor SDA
BMP388 INT
NRF24L01 INT
SPI Flash CS
LSM9DS1 CSM
LSM9DS1 CSAG
LSM9DS1 SDI
LSM9DS1 SDO
LSM9DS1 SCL
LSM9DS1 INT1
USART TX
USART RX
LSM9DS1 INT2
Buzzer
Blue LED
Green LED
Red LED
LED BLUE
Notes:
TIM6 & 7 are only used by DAC and don't have any pins
All pins are 5V tolerant on F401
Pins 10 and 41 on F411 are 3.3V only.