


Dimensions in mm

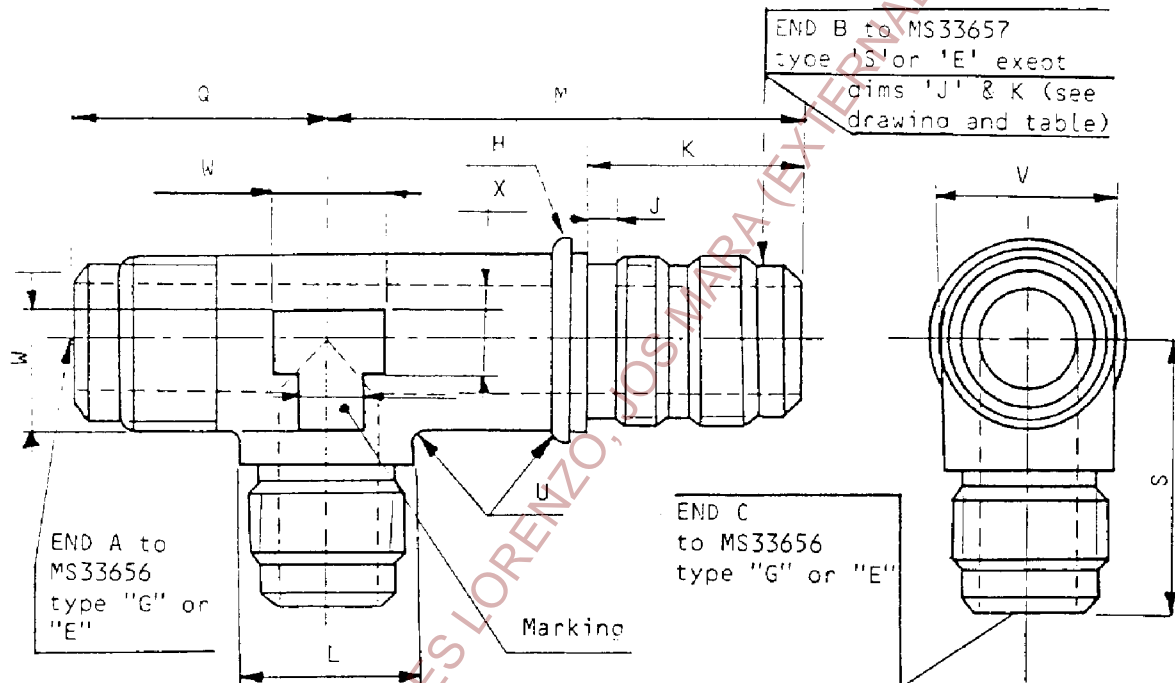

MATERIAL: Per NSA3500 - Aluminum alloy: Code "D"

PROTECTION: Chrome anodized

EXAMPLE OF PART NO.: NSA83502410D = Fitting "T", Reducing bulkhead; for flared tubes dia. 5/8inch for ends "A" and "B", and dia. 1/4inch for end "C"

PROCUREMENT SPECIFICATION: MIL-F-5509 except material acceptance

Approved AIRBUS-INDUSTRIE	Title CONNECTOR - REDUCTION 'T' - FOR FLARED TUBE	Classification
		NSA835024
	Issue: 05/71 Revision: ① 04/86	Page 01 of 02

Ref. No.	End - A		End - B		End - C		H	J	M $\pm 0,254$	Q $\pm 0,254$	S $\pm 0,254$	U $\pm 0,4$	V $\pm 0,4$	W	X
	Thread	Type \varnothing End	Thread	Type \varnothing End	Thread	Type \varnothing End									
6	9/16-18 UNJF	3/8 G	9/16-18 UNJF	3/8 S	9/16-18 UNJF	3/8 G	2,38	8	68,8	21	27,4	2,38	14,29	12,7	7,94
10	7/8-14 UNJF	5/8 G	7/8-14 UNJF	5/8 S	7/16-20 UNJF	1/4 E	2,38	8	71	35	30	3,18	22,22	19,84	11,11
11	7/8-14 UNJF	5/8 G	7/8-14 UNJF	5/8 S	1/2 -20 UNJF	5/16 E	2,38	8	72	35	30	3,18	22,22	19,84	11,11
12	1" 1/16-12 UNJF	3/4 G	1" 1/16-12 UNJF	3/4 S	1/2 -20 UNJF	5/16 E	2,38	8	75,5	42	32	3,18	26,99	23,02	12,7
13	1" 1/16-12 UNJF	3/4 G	1" 1/16-12 UNJF	3/4 S	7/16-20 UNJF	1/4 E	2,38	8	83	42	32	3,18	26,99	23,02	12,7
14	1" 5/16-12 UNJF	1" G	1" 5/16-12 UNJF	1" S	3/4 -16 UNJF	1/2 E	2,38	8	70	40	40	3,18	33,34	27,98	15,87
16	1" 5/16-12 UNJF	1" G	1" 1/16-12 UNJF	3/4 E	1" 5/16-12 UNJF	1" G	2,38	8	83	46	46	3,18	33,34	27,98	15,87
17	7/8-14 UNJF	5/8 E	1" 5/16-12 UNJF	1" S	1" 5/16-12 UNJF	1" G	2,38	8	106	45	46	3,18	33,34	27,98	15,87
18	1" 5/16-12 UNJF	1" G	1" 1/16-12 UNJF	3/4 E	1" 5/16-12 UNJF	1" G	2,38	8	110	46	46	3,18	33,34	27,98	15,87

Ref. No.	K $\pm 0,4$	L
18	44,5	

Ref. No.	K $\pm 0,4$	L
6	33,657	
10	40,610	22,22
11	40,610	22,22
12	44,5	26,98
13	44,5	26,98
14	44,5	19,05
16	44,5	
17	44,5	

J

Classification

NSA835024

Page 02

Issue: 05/71 J 04/86