


LED Can Display

Soft Series




Ryhamled
WhatsApp contact

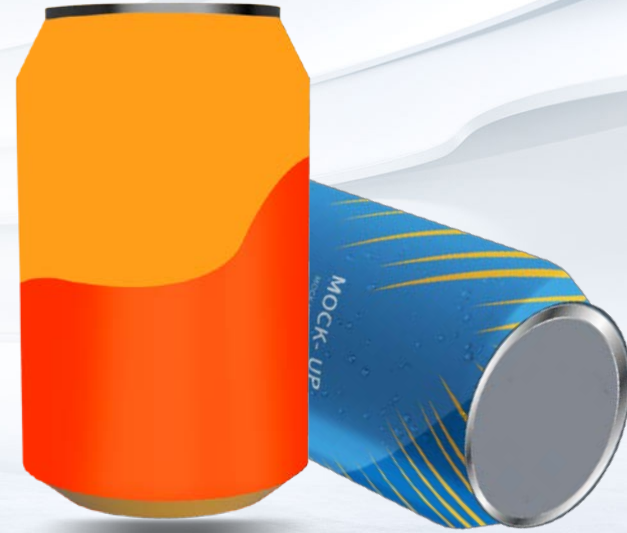



High Definition



Smart
Splicer




Multiple
Ports



Dual Control Mode



Wireless



Seamless



Ryhamled
WhatsApp contact



Models



C127



C134



C170

RYHAM
OPTOELECTRONICS

Diameter:
713mm



Weight:
65kg

Diameter:
764.33mm



Weight:
73kg

Diameter:
611mm



Weight:
55kg

Sampled
up contact



Devices and Ports Supported

- Supports multiple playback modes to adapt to different scenarios.
- Supports both synchronous and asynchronous playback.
- Multiple interfaces.

Multi Devices Supported



PC



Mobile



Tablet



U Disk

Multi Ports



WIFI



HDMI



Ethernet




U Disk






Can Shape, Icebox Inside

Direct display of brand appearance
Matched with refrigerator function, your
drinks will be sold all summer
Appearance display plays pictures and
videos, saying goodbye to single display

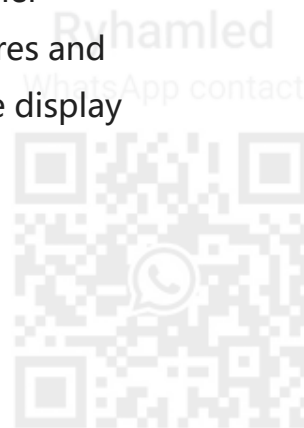



OF ELECTRONICS

Brand Promotion



Ryhamled
WhatsApp contact





Smart Control

Support remote intelligent monitoring, remote and timed screen on/off
Support remote wireless interactive operation with mobile phones and smart terminals, ultimate control anytime, anywhere



Ryhamled
WhatsApp contact






RYH
OPTOELECTRONICS

Show Styles



Ryhamled
WhatsApp contact





Model	P2	P1.875	P1.86	
Lamp type	SMD1515/1921(OptionCOB)	SMD1515/1921(OptionCOB)	SMD1515/1921 (OptionCOB)	
Pixel density (dots/m ²)	250000	284444/m ²	288906/m ²	
Size (mm)	H1270mm X Diameter: 713mm	H1341mm X Diameter: 767mm	H1700mm X Diameter: 611mm	
Display pixels (dots)	1120X560pixels	1280X630pixels	1032X817pixels	
Box weight (kg)	Weight: 65kg	Weight: 73kg	Weight: 67kg	
Control mode	Ethernet/WIFI/4G Cloud Option) Ethernet/WIFI/4G Cloud (Option) Ethernet/WIFI/4G Cloud (Option)			
Maintenance mode	Front service	Front service	Front service	
Box material	Iron sheet	Iron sheet	Iron sheet	
Brightness (Nits)	≥600	≥600	≥600	
Packaging size (mm)	900mm*900mm*1530mm	900*900*1600mm	800*800*1850mm	
Viewing angle (H/V)	170°/170°	170°/170°	170°/170°	
Brightness/color uniformity	≥99.8%	≥99.8%	≥99.8%	
Contrast	15000 : 1	15000 : 1	15000 : 1	
Frame switching frequency	50/60	50/60	50/60	
Drive mode	Constant drive, 1/40扫	Constant drive, 1/32扫	Constant drive, 1/43扫	
Grayscale level	16bit	16bit	16bit	
Refresh rate (Hz)	3840	3840	3840	
Max power consumption (W/m ²)	420	420	420	
Average power consumption (W/m ²)	100-200	100-200	100-200	
Power supply requirements	AC90-264V,47-63Hz			
Working temperature/humidity range (°C/RH)	-20~60°C/10%~85%			
Storage temperature/humidity range (°C/RH)	-20~60°C/10%~85%			
Applicable standards	CCC/CE/RoHS/FCC/CB/TUV/IEC/BIS			

Dynamic

Dynamic

Dynamic

Dynamic

Dynamic

Dynamic


Dynamic



RYHAM
OPTOELECTRONICS

Application Scenarios

Enterprise

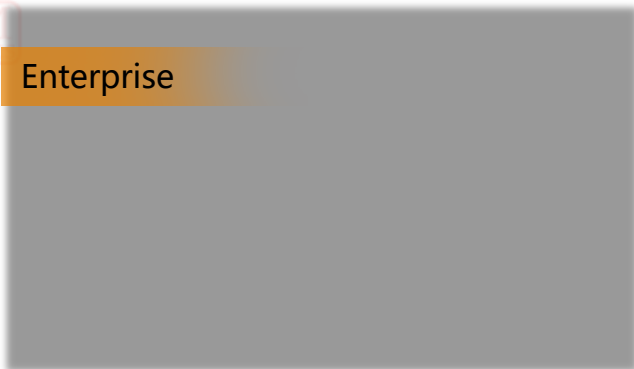

Mall



Hotel



Showcase



Ryhamled
WhatsApp contact





Contact us

Jack

Sales Director

Mobile: +86 135 1021 1126

Whatsapp/Wechat: +86 135 1021 1126

Email: jack@ryham.cn





Wish your business great success !

Ryhamled
WhatsApp contact

