

Waveshare Pi5 Connector Adapter (F) wall frame: clearances measured on the delivered STEP files (mm; red = gap, orange dashed = cable plug / lead space, blue = screws, hatched = estimated pin tails)


A Front: frame cut at z 14.1 (red) over Waveshare's drawing; model board dashed green, front window dash-dot

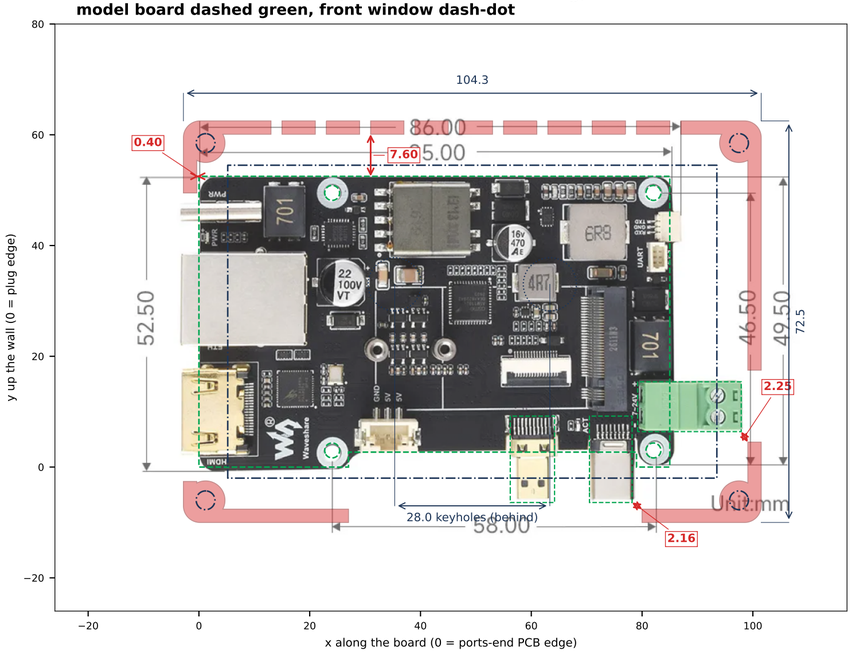


B Section y = 30.2: RJ45, left keyhole boss

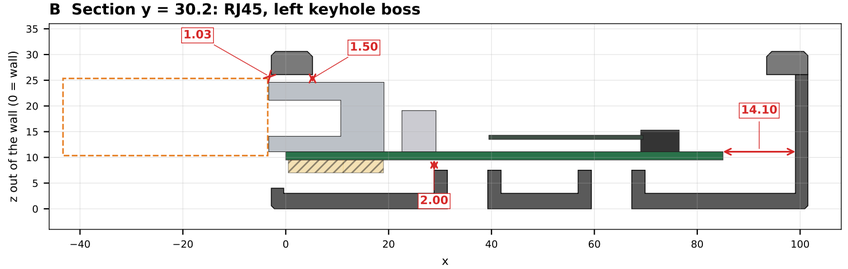


C Section y = 10.9: HDMI jack, 7-24 V terminal

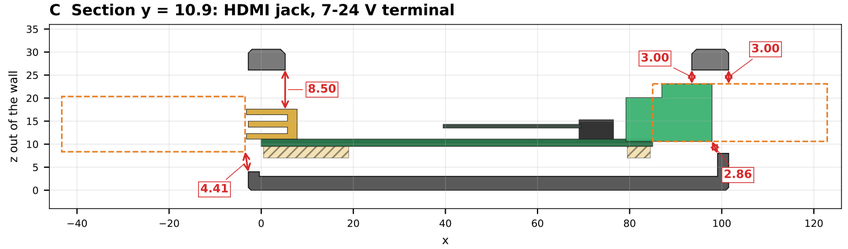


D Section x = 74.35: USB-C plug, bottom slot, top wall

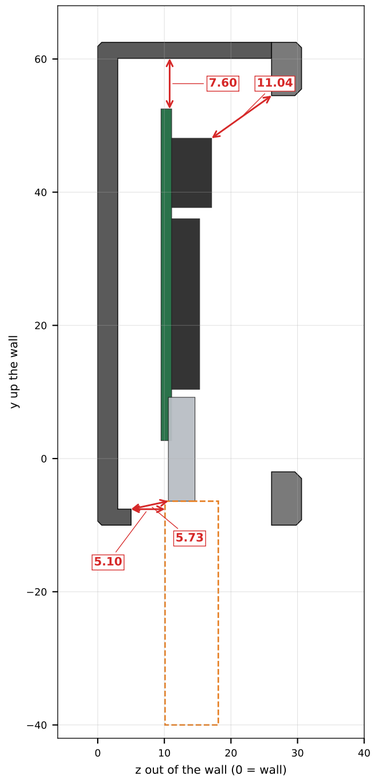

E Section x = 35.4: left keyhole, wall screw head 3 mm out

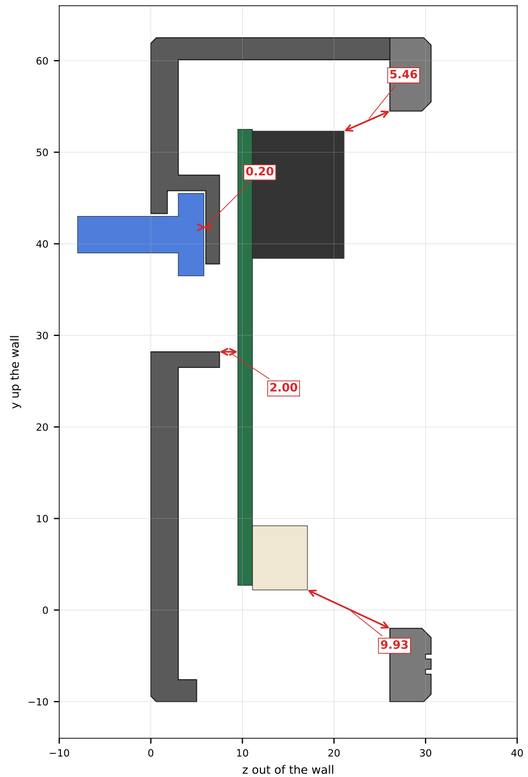

F Section x = 97.5: right-hand front screws, terminal

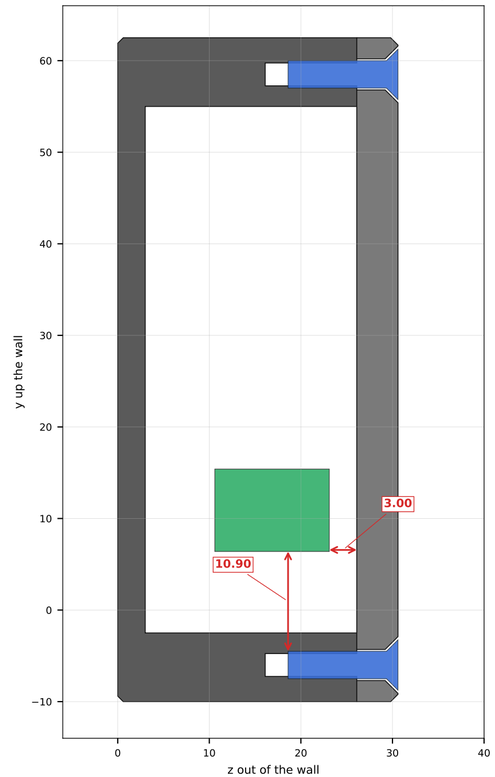

Sections are cut through the delivered STEP files (read back from disk) and the adapter model; red arrows measure within each section, the table gives the 3D minimum. Board positions from Waveshare's drawing (+-0.3 mm); parts marked est. have estimated heights. Full numbers: CLEARANCES_from_STEP.txt.