School of Engineering

Civil Engineering

Scaffolding

Scaffolding:

Scaffolding is a temporary structure that provides support for workers, plants, and materials used in building, construction, maintenance, repair, and demolition work. We need to follow scaffolding safety procedures.

Types of Scaffolding

Single:
This types of scaffolding is for the most part utilized for the brickworks and comprising of an outer line of verticals which are by and large known as guidelines to which the longitudinal individuals are tied at various degrees of working. The putlogs or the cross members are attached to the uprights or standards at the exterior end.

Steel:
In construction sites the use of the steel scaffolding are similar to the timber scaffolding. In this types of scaffolding the wooden members are replaced by 38mm – 64mm diameter steel tubes and rope lashings, special types of fittings or steel couplets are used for connecting various members.It is used for conventional low rise buildings.

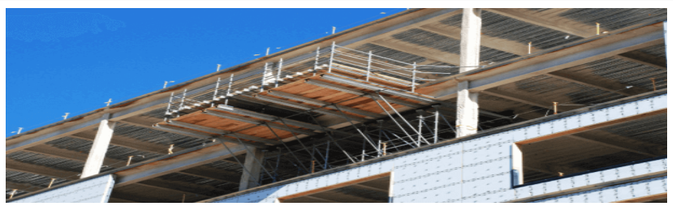

Needle:
For the construction of the upper piece of a tall residential building, cantilever scaffolding eliminates undesirable scaffolding at lower levels keeping the space free for vehicles, and so on. It is similar to the twofold scaffold, then again, actually it is supported at the base by a cantilever prop.

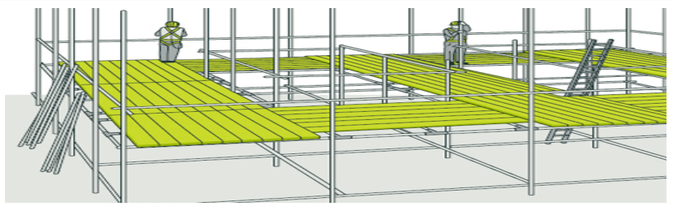

Birdscage:
This types of scaffolding is used for the inner works of the construction consisting of a simple cage that are supported on four verticals and workers work easily from this. It is not a fixed support. This types of scaffolding are portable and can be moved easily from one place to another.

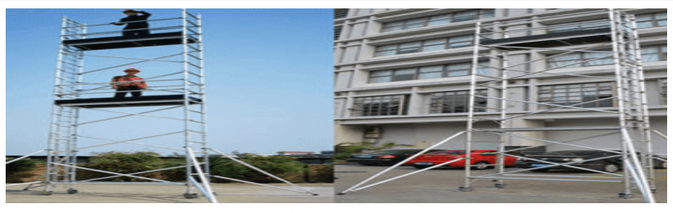

Ladder:
This is used for light work and is usually versatile. This types of scaffolding consists of two ladders where the top ends are combined by planks or platform so that a person can work on this above stage.

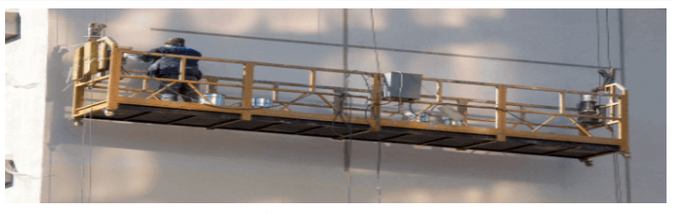

Suspended:
In tall buildings for working at significant levels, such as the painting of tall buildings, it is more helpful and efficient to suspend the working stage from over the ground than to support it from the ground. This is especially so when the height is in excess of 30m.

Guided by: Professor Kajol Thummar
Assistant Professor
Civil Engg Department

Prepared by: Tirtha Bdr Pandey(22SOECV11613)
Migisha Migael Carmel(22SOECV11612)
Hitesh Rawal(22SOECV11614)