TABLE 4-1 REGISTER FILE SUMMARY

Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Value on Power-on Reset	Value on all other resets (Note3)
Bank 0											
00h	INDF	Uses contents of FSR to address data memory (not a physical register)								---- ----	---- ----
01h	TMR0	8-bit real-time clock/counter								xxxx xxxx	uuuu uuuu
02h	PCL	Low order 8 bits of the Program Counter (PC)								0000 0000	0000 0000
03h	STATUS (2)	IRP	RP1	RP0	$\overline{TO}$	$\overline{PD}$	Z	DC	C	0001 1xxx	000q quuu
04h	FSR	Indirect data memory address pointer 0								xxxx xxxx	uuuu uuuu
05h	PORTA	—	—	—	RA4/T0CKI	RA3	RA2	RA1	RA0	---x xxxx	---u uuuu
06h	PORTB	RB7	RB6	RB5	RB4	RB3	RB2	RB1	RB0/INT	xxxx xxxx	uuuu uuuu
07h		Unimplemented location, read as '0'								---- ----	---- ----
08h	EEDATA	EEPROM data register								xxxx xxxx	uuuu uuuu
09h	EEADR	EEPROM address register								xxxx xxxx	uuuu uuuu
0Ah	PCLATH	—	—	—	Write buffer for upper 5 bits of the PC (1)					---0 0000	---0 0000
0Bh	INTCON	GIE	EEIE	T0IE	INTE	RBIE	T0IF	INTF	RBIF	0000 000x	0000 000u
Bank 1											
80h	INDF	Uses contents of FSR to address data memory (not a physical register)								---- ----	---- ----
81h	OPTION_ REG	$\overline{RBPU}$	INTEDG	T0CS	T0SE	PSA	PS2	PS1	PS0	1111 1111	1111 1111
82h	PCL	Low order 8 bits of Program Counter (PC)								0000 0000	0000 0000
83h	STATUS (2)	IRP	RP1	RP0	$\overline{TO}$	$\overline{PD}$	Z	DC	C	0001 1xxx	000q quuu
84h	FSR	Indirect data memory address pointer 0								xxxx xxxx	uuuu uuuu
85h	TRISA	—	—	—	PORTA data direction register					---1 1111	---1 1111
86h	TRISB	PORTB data direction register								1111 1111	1111 1111
87h		Unimplemented location, read as '0'								---- ----	---- ----
88h	EECON1	—	—	—	EEIF	WRERR	WREN	WR	RD	---0 x000	---0 q000
89h	EECON2	EEPROM control register 2 (not a physical register)								---- ----	---- ----
~~0Ah~~ 8Ah	PCLATH	—	—	—	Write buffer for upper 5 bits of the PC (1)					---0 0000	---0 0000
~~0Bh~~ 8Bh	INTCON	GIE	EEIE	T0IE	INTE	RBIE	T0IF	INTF	RBIF	0000 000x	0000 000u

Legend: x = unknown, u = unchanged. - = unimplemented read as '0', q = value depends on condition.

Note 1: The upper byte of the program counter is not directly accessible. PCLATH is a slave register for PC<12:8>. The contents of PCLATH can be transferred to the upper byte of the program counter, but the contents of PC<12:8> is never transferred to PCLATH.

2: The $\overline{TO}$ and $\overline{PD}$ status bits in the STATUS register are not affected by a $\overline{MCLR}$ reset.

3: Other (non power-up) resets include: external reset through $\overline{MCLR}$ and the Watchdog Timer Reset.

TABLE 9-2 PIC16FXX INSTRUCTION SET

Mnemonic, Operands		Description	Cycles	14-Bit Opcode MSb LSb	Status Affected	Notes
BYTE-ORIENTED FILE REGISTER OPERATIONS						
ADDWF	**f, d**	Add W and f	1	00 0111 dfff ffff	C,DC,Z	1,2
ANDWF	**f, d**	AND W with f	1	00 0101 dfff ffff	Z	1,2
CLRF	**f**	Clear f	1	00 0001 lfff ffff	Z	24
CLRW	**-**	Clear W	1	00 0001 0xxx xxxx	Z	
COMF	**f, d**	Complement f	1	00 1001 dfff ffff	Z	1,2
DECF	**f, d**	Decrement f	1	00 0011 dfff ffff	Z	1,2
DECFSZ	**f, d**	Decrement f, Skip if 0	1(2)	00 1011 dfff ffff		1,2,3
INCF	**f, d**	Increment f	1	00 1010 dfff ffff	Z	1,2
INCFSZ	**f, d**	Increment f, Skip if 0	1(2)	00 1111 dfff ffff		1,2,3
IORWF	**f, d**	Inclusive OR W with f	1	00 0100 dfff ffff	Z	1,2
MOVF	**f, d**	Move f	1	00 1000 dfff ffff	Z	1,2
MOVWF	**f**	Move W to f	1	00 0000 lfff ffff		4
NOP	**-**	No Operation	1	00 0000 0xx0 0000		
RLF	**f, d**	Rotate Left f through Carry	1	00 1101 dfff ffff	C	1,2
RRF	**f, d**	Rotate Right f through Carry	1	00 1100 dfff ffff	C	1,2
SUBWF	**f, d**	Subtract W from f	1	00 0010 dfff ffff	C,DC,Z	1,2
SWAPF	**f, d**	Swap nibbles in f	1	00 1110 dfff ffff		1,2
XORWF	**f, d**	Exclusive OR W with f	1	00 0110 dfff ffff	Z	1,2
BIT-ORIENTED FILE REGISTER OPERATIONS						
BCF	**f, b**	Bit Clear f	1	01 00bb bfff ffff		1,2
BSF	**f, b**	Bit Set f	1	01 01bb bfff ffff		1,2
BTFSC	**f, b**	Bit Test f, Skip if Clear	1 (2)	01 10bb bfff ffff		3
BTFSS	**f, b**	Bit Test f, Skip if Set	1 (2)	01 11bb bfff ffff		3
LITERAL AND CONTROL OPERATIONS						
ADDLW	**k**	Add literal and W	1	11 111x kkkk kkkk	C,DC,Z	
ANDLW	**k**	AND literal with W	1	11 1001 kkkk kkkk	Z	
CALL	**k**	Call subroutine	2	10 0kkk kkkk kkkk		
CLRWDT	**-**	Clear Watchdog Timer	1	00 0000 0110 0100	$\overline{TO}$,$\overline{PD}$	
GOTO	**k**	Go to address	2	10 1kkk kkkk kkkk		
IORLW	**k**	Inclusive OR literal with W	1	11 1000 kkkk kkkk	Z	
MOVLW	**k**	Move literal to W	1	11 00xx kkkk kkkk		
RETFIE	**-**	Return from interrupt	2	00 0000 0000 1001		
RETLW	**k**	Return with literal in W	2	11 01xx kkkk kkkk		
RETURN	**-**	Return from Subroutine	2	00 0000 0000 1000		
SLEEP	**-**	Go into standby mode	1	00 0000 0110 0011	$\overline{TO}$,$\overline{PD}$	
SUBLW	**k**	Subtract W from literal	1	11 110x kkkk kkkk	C,DC,Z	
XORLW	**k**	Exclusive OR literal with W	1	11 1010 kkkk kkkk	Z	

Note 1: When an I/O register is modified as a function of itself (e.g., `MOVF PORTB, 1`), the value used will be that value present on the pins themselves. For example, if the data latch is '1' for a pin configured as input and is driven low by an external device, the data will be written back with a '0'.

2: If this instruction is executed on the TMR0 register (and, where applicable, d = 1), the prescaler will be cleared if assigned to the Timer0 Module.

3: If Program Counter (PC) is modified or a conditional test is true, the instruction requires two cycles. The second cycle is executed as a NOP.

4: Die unterstrichenen Zeichen bei CLRF und MOVWF sind keine l (L) sondern 1 (eins)

TABLE 3-1 PIC16F8X PINOUT DESCRIPTION

Pin Name	DIP No.	SOIC No.	I/O/P Type	Buffer Type	Description
OSC1/CLKIN	16	16	I	ST/CMOS (3)	Oscillator crystal input/external clock source input.
OSC2/CLKOUT	15	15	O	—	Oscillator crystal output. Connects to crystal or resonator in crystal oscillator mode. In RC mode, OSC2 pin outputs CLKOUT which has 1/4 the frequency of OSC1, and denotes the instruction cycle rate.
$\overline{MCLR}$	4	4	I/P	ST	Master clear (reset) input/programming voltage input. This pin is an active low reset to the device.
					PORTA is a bi-directional I/O port.
RA0	17	17	I/O	TTL	
RA1	18	18	I/O	TTL	
RA2	1	1	I/O	TTL	
RA3	2	2	I/O	TTL	
RA4/T0CKI	3	3	I/O	ST	Can also be selected to be the clock input to the TMR0 timer/ counter. Output is open drain type.
					PORTB is a bi-directional I/O port. PORTB can be software programmed for internal weak pull-up on all inputs.
RB0/INT	6	6	I/O	TTL/ST (1)	RB0/INT can also be selected as an external interrupt pin.
RB1	7	7	I/O	TTL	
RB2	8	8	I/O	TTL	
RB3	9	9	I/O	TTL	
RB4	10	10	I/O	TTL	Interrupt on change pin.
RB5	11	11	I/O	TTL	Interrupt on change pin.
RB6	12	12	I/O	TTL/ST (2)	Interrupt on change pin. Serial programming clock.
RB7	13	13	I/O	TTL/ST (2)	Interrupt on change pin. Serial programming data.
VSS	5	5	P	—	Ground reference for logic and I/O pins.
VDD	14	14	P	—	Positive supply for logic and I/O pins.

Legend: I= input O = output I/O = Input/Output P = power
— = Not used TTL = TTL input ST = Schmitt Trigger input

Note 1: This buffer is a Schmitt Trigger input when configured as the external interrupt.
2: This buffer is a Schmitt Trigger input when used in serial programming mode.
3: This buffer is a Schmitt Trigger input when configured in RC oscillator mode and a CMOS input otherwise.

FIGURE 4-1: REGISTER FILE MAP - PIC16F83/CR83

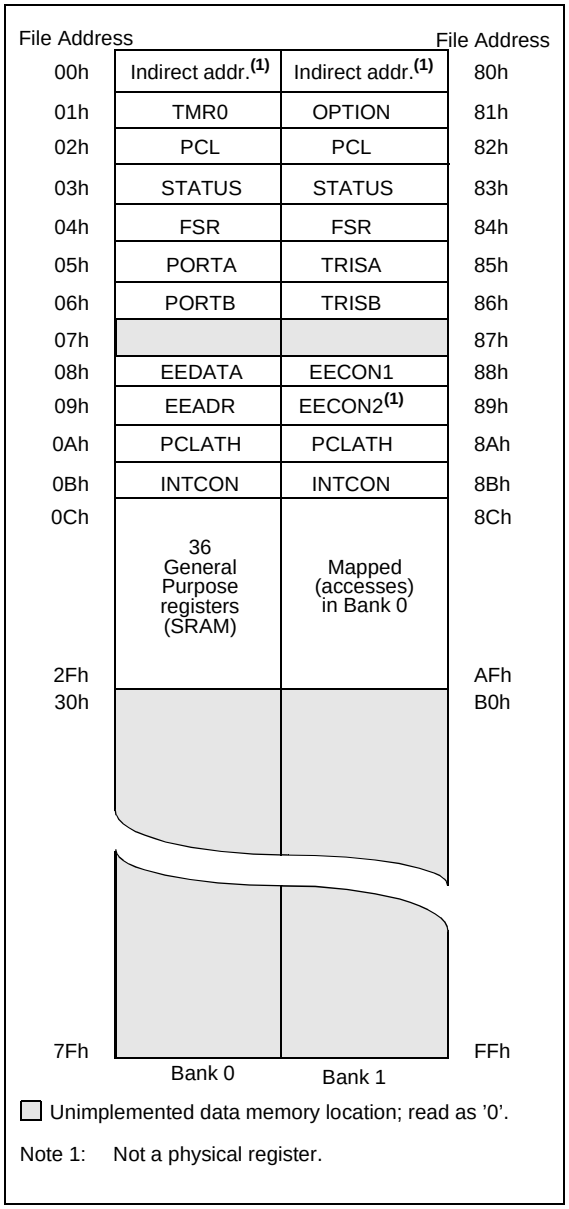

FIGURE 4-2: REGISTER FILE MAP - PIC16F84/CR84

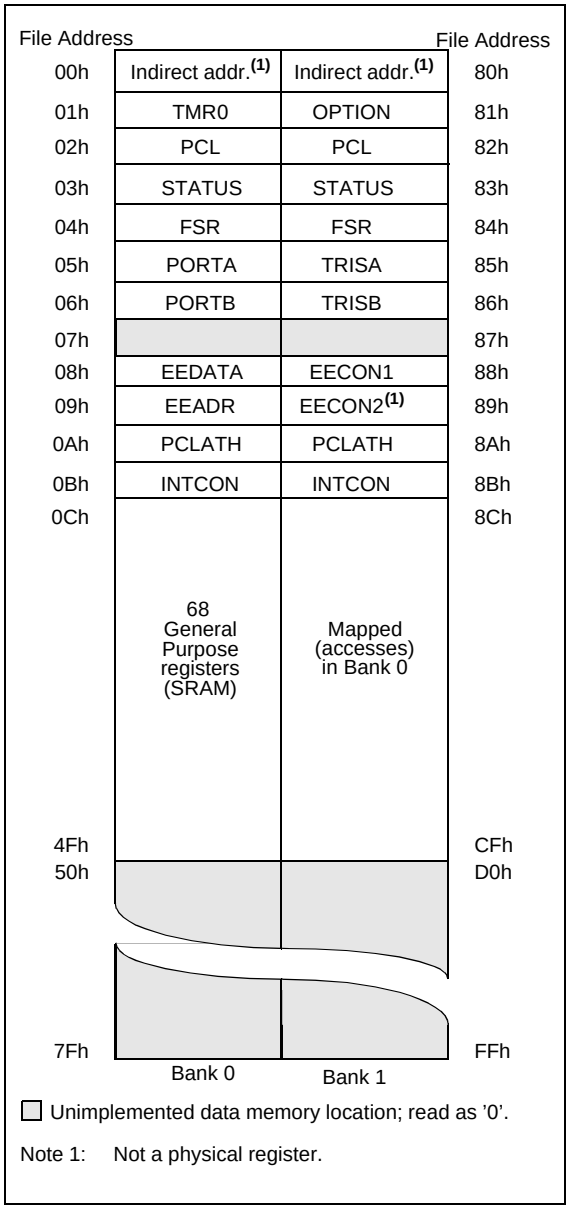

PIC16CXX devices contain an 8-bit ALU and working register. The ALU is a general purpose arithmetic unit. It performs arithmetic and Boolean functions between data in the working register and any register file.

The ALU is 8-bits wide and capable of addition, subtraction, shift and logical operations. Unless otherwise mentioned, arithmetic operations are two's complement in nature. In two-operand instructions, typically one operand is the working register (W register), and the other operand is a file register or an immediate constant. In single operand instructions, the operand is either the W register or a file register.

The W register is an 8-bit working register used for ALU operations. It is not an addressable register.

Depending on the instruction executed, the ALU may affect the values of the Carry (C), Digit Carry (DC), and Zero (Z) bits in the STATUS register. The C and DC bits operate as a $\overline{\text{borrow}}$ and $\overline{\text{digit borrow}}$ out bit, respectively, in subtraction. See the `SUBLW` and `SUBWF` instructions for examples.

A simplified block diagram for the PIC16F8X is shown in Figure 3-1, its corresponding pin description is shown in Table 3-1.

FIGURE 3-1: PIC16F8X BLOCK DIAGRAM