
Measured stereo record AA14 (fixed station), scored against its own zero field (nRMSE 1.062, not the constant 1.0)

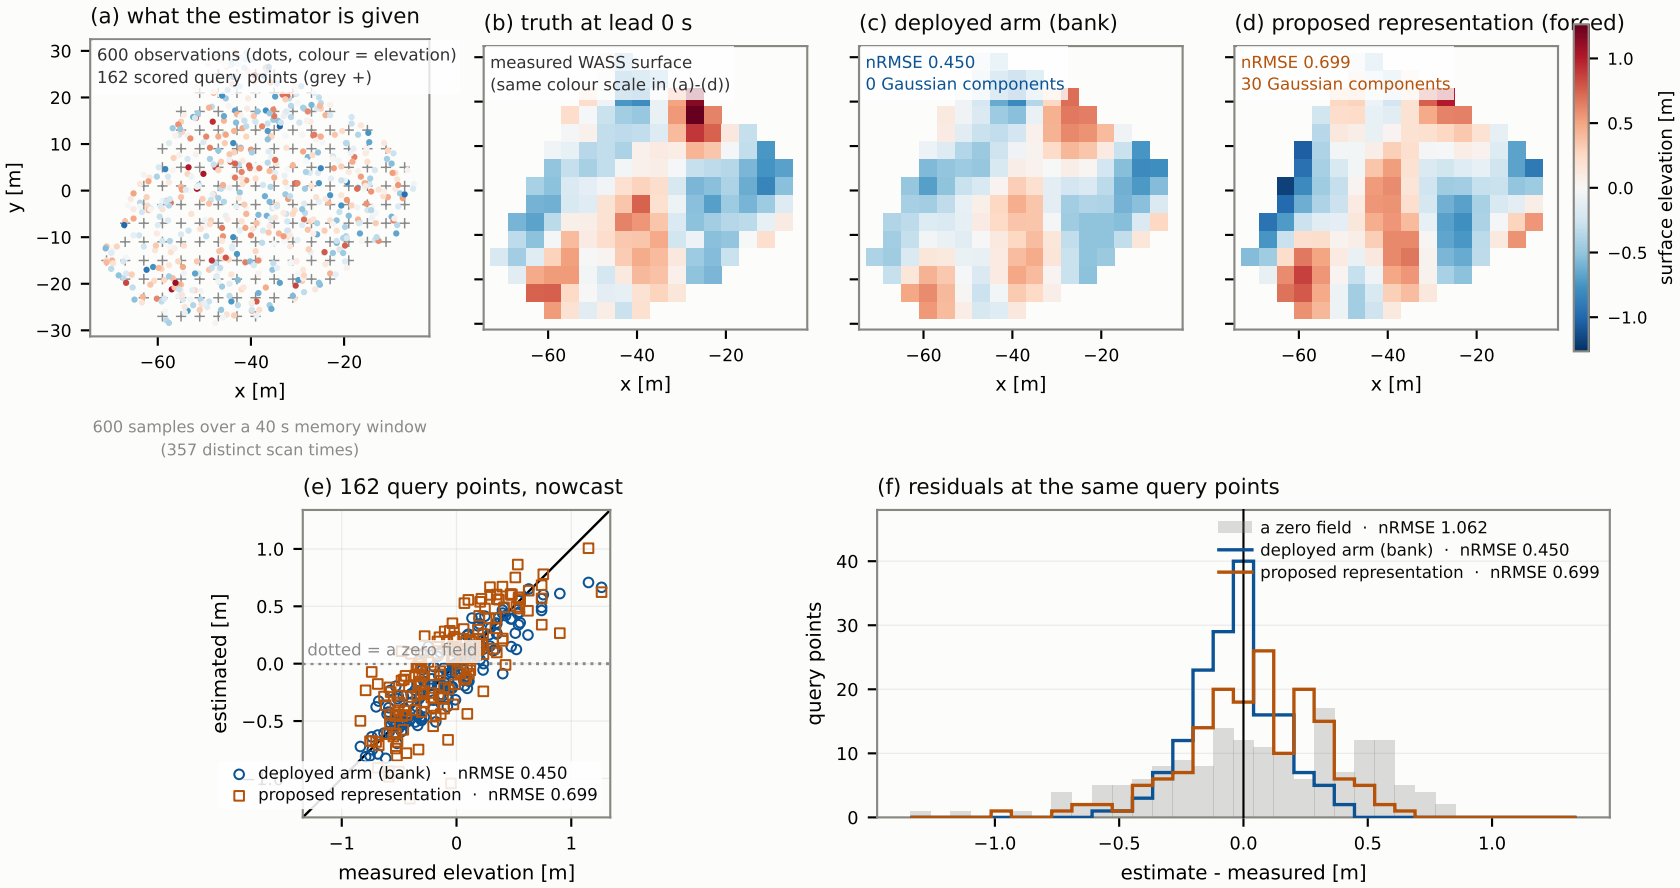

On measured input the shipped router does NOT use the learned prior (WavePrior): it hands the estimate to a separate bank estimator (c), which builds no Gaussian components at all. The "proposed representation" arm (d) is that prior forced on. Both arms receive the identical observations and are scored at the identical query points.

One record, one 40 s window, nowcast only: this is what the two arms look like, not how often. Counts over the 12 measured records are reported separately. The observations are a synthetic sparsification of a measured WASS stereo surface, not LiDAR returns.