

# Predictive analysis of city based crops using IoT based Hydroponic system

*by* Yokesh Babu S 1

---

**Submission date:** 17-May-2022 09:05PM (UTC+0530)

**Submission ID:** 1838439907

**File name:** review-3-draft.docx (7.1M)

**Word count:** 10487

**Character count:** 60711

# **Predictive analysis of city based crops using Internet of Things based Hydroponic system**

A PROJECT REPORT

submitted by

**S A HARIPRASAD (18BCE0686)  
NIKHIL K (18BCE2321)**

1  
*in partial fulfilment for the award of the degree of*

**B. Tech**

in

**Computer Science and Engineering**



**VIT®**

**Vellore Institute of Technology**

(Deemed to be University under section 3 of UGC Act, 1956)

Vellore-632014, Tamil Nadu, India

**School of Computer Science and Engineering**

May, 2022

(i)



## School of Computer Science and Engineering

### DECLARATION

I hereby declare that the project entitled "**Predictive analysis of ambient conditions for crop growth using Internet of Things**" submitted by me to the School of Computer Science and Engineering, Vellore Institute of Technology, Vellore-14 towards the partial fulfilment of the requirements for the award of the degree of **Bachelor of Technology in Computer Science and Engineering** is a record of bonafide work carried out by me under the supervision of **Yokesh Babu S, Assistant Professor(Selection Grade)**. I further declare that the work reported in this project has not been submitted and will not be submitted, either in part or in full, for the award of any other degree or diploma of this institute or of any other institute or university.

Signature

Name :S A Hariprasad  
Reg.No:18BCE0686



## School of Computer Science and Engineering

### CERTIFICATE

The project report entitled "**Predictive analysis of ambient conditions for crop growth using Internet of Things**" is prepared and submitted by **Candidate's S A 7  
Hariprasad(18BCE0686), Nikhil K(18BCE2321)**, has been found satisfactory in terms of scope, quality and presentation as partial fulfillment of the requirements for the award of the degree of **Bachelor of Technology in Computer Science and Engineering** in Vellore Institute of Technology, Vellore-14, India.

Guide  
(Name & Signature)

Internal Examiner  
(Name & Signature)

External Examiner  
(Name & Signature)

## **ACKNOWLEDGEMENT**

I am indebted to many people who helped me accomplish this project successfully. Firstly, I express my gratitude to VIT University, Vellore and the HOD and Dean, Scope to make me eligible to seek this opportunity. I perceive this opportunity as a milestone for my learning in the university.

I would like to express a deep sense of gratitude to Dr. Yokesh Babu S, for my entire duration of project without whose wise counsel and able guidance, it would have not been possible to carry out the project in this manner.

I would like to express my gratitude to my friend and my project mate Nikhil K , for collaborating and helping me to carry out the project

I express my indebtedness to all who have directly and indirectly contributed to the successful completion of my project.

Finally , I thank my parents for their blessing and constant support, without which this project would not have seen the light of the day.

**S A HARIPRASAD**

16  
**TABLE OF CONTENTS**

<b>Title</b>	<b>Page</b>
Title Page	25 i
Declaration	ii
Certificate	iii
Acknowledgement	iv
Table of Contents	v
List of Tables	vi
List of Figures	vii
List of Abbreviations	viii
Abstract	ix
1. Introduction	
1.1. Theoretical Background	
1.2. Motivation	
1.3. Aim of the proposed work	
1.4. Objectives of the proposed work	
1.5. Report Organization	
2. Literature Survey	
2.1. Survey of the Existing Models and Works	
2.2. Summary and Gaps identified in survey	
3. Overview of Proposed System	
3.1. Introduction	
3.2. Proposed System	
3.3. Proposed System Model	
4. Proposed system Analysis and Design	
4.1. Introduction	
4.2. Requirement Analysis	
4.2.1. Functional Requirements	
4.2.1.1. Product Perspective	
4.2.1.2. Product Features	
4.2.1.3. User Characteristics	
4.2.1.4. Assumption and Dependencies	
4.2.1.5. Domain Requirements	

4

#### 4.2.1.6. User Requirements

#### 4.2.2. Non-Functional Requirements

##### 4.2.2.1. Product Requirements

4.2.2.1.1. Efficiency

4.2.2.1.2. Reliability

4.2.2.1.3. Portability

##### 4.2.3. System Requirements

###### 4.2.3.1. Hardware Requirements

###### 4.2.3.2. Software Requirements

## 5. Results and Discussion

### 5.1. Sample Test Cases

### 5.2. Summary of Results

## 6. Conclusion

### 6.1. Limitations

### 6.2. Scope for future work

Annexure – I (Sample codes)

References

## LIST OF TABLES

Table 1: Tabular literature Survey .....	19
Table 2:Pin Diagram for Circuit .....	24
Table 3:Range of parameters Phase-1 .....	28
Table 4:Dataset Description Phase-1 .....	28
Table 5:Range of parameters Phase-2.....	28
Table 6:Dataset Description Phase-2 .....	29
Table 7:Range of parameters phase-3 .....	29
Table 8:Dataset description Phase-3 .....	29
Table 9:Range of parameters full data .....	30
Table 10:Range of Parameters full data.....	30
Table 11:Linear variation of parameters with respect to time .....	35
Table 12:Linear variation of Ph with other parameters .....	36
Table 13:Linear Variation of water level with other parameters .....	37
Table 14:Linear variation of sunlight with other parameters.....	38
Table 15:Linear variation of temperature with other parameters .....	39
Table 16:Linear variation of humidity with other parameters .....	40
Table 17:Linear variation of soilmoisture with other parameters .....	41
Table 18:Linear Regression Between Parameters for Initial Phase of Coriander Plant Growth .....	42
Table 19:Linear Regression Between Parameters for Growing Phase of Coriander Plant Growth .....	43
Table 20:Linear Regression Between Parameters for Harvesting Phase of Coriander Plant Growth .....	45
Table 21: Linear Regression Between Parameters for Full Phase of Coriander Plant Growth .....	45
Table 22:Linear Regression Between Parameters for Full Phase of Coriander Plant Growth .....	46
Table 23:Support Vector Regression Between Parameters for Initial Phase of Coriander Plant Growth .....	48
Table 24:Support Vector Regression Between Parameters for Growing Phase of Coriander Plant Growth .....	49
Table 25:Support Vector Regression Between Parameters for Harvesting Phase of Coriander Plant Growth .....	50
Table 26:Support Vector Regression Between Parameters for Full Phase of Coriander Plant Growth .....	51
Table 27:Decision Tree Regression Between Parameters for Initial Phase of Coriander Plant Growth .....	53
Table 28:Decision Tree Regression Between Parameters for Growing Phase of Coriander Plant Growth .....	54
Table 29:Decision Tree Regression Between Parameters for Harvesting Phase of Coriander Plant Growth .....	55
Table 30:Decision Tree Regression Between Parameters for Full Phase of Coriander Plant Growth .....	57
Table 31:Yield generated through our hydroponic system.....	58

## **LIST OF FIGURES**

Figure 1:Food requirements In India Across States.....	11
Figure 2:Population Density of Indian Cities .....	12
Figure 3:World Index Hunger across Indian States .....	12
Figure 4:Per Capita Food Grain Availability.....	12
Figure 5:Architecture Diagram .....	22
Figure 6:Circuit Diagram of System.....	23
Figure 7:Image of automated hydroponic system.....	59
Figure 8: Graphical user interface for hydroponic system.....	60
Figure 9: Hydroponic system code part-1 .....	61
Figure 10:Hydroponic system code part 2 .....	62
Figure 11:Code for data analysis .....	63
Figure 12:Code for linear regression analysis .....	64
Figure 13:Code for decision tree regression .....	66

## **LIST OF ABBREVIATIONS**

<b>Abbreviation</b>	<b>Expansion</b>
IOT	Internet of Things
PH	Presence of Hydrogen
LPWAN	Low-Power Wide-Area Network
MAE	Mean Absolute Error
MSE	Mean Squared Error
RMSE	Root Mean Squared Error
RMSLE	Root Mean Squared Log error
R2	R Squared Error

## ABSTRACT

1 In a rapidly developing country like India, which has the world's highest growing GDP Urbanization is being seen in every nook and corner of the country. The difference between the population density of the cities and rural areas are very high. The population of the cities are growing exponentially every year, because of which the agricultural farms in and around the cities are being converted into residential skyscrapers. The need and demand for crops and food is growing up but the area to grow is going down. Due to this alarming scenario, hydroponic agriculture has risen in popularity and practice. It is a form of agriculture in which the plants are grown with restricted water supply. In this work, we are growing coriander plant in a controlled environment with constant monitoring, the controlled environment being restricted water supply i.e. Hydroponic farming. Various parameters like Soil pH, Moisture levels etc. are recorded on daily basis and made into a data set. This data set, then with the help of Supervised Machine Learning algorithms we are going to correlate the data collected via IOT by the help of Regression Models, find the trends within the taken parameters and give an idea as to which conditions give a better yield. The main objective of our work is to find and show the correlation between various parameters take into account while growing a crop through hydroponic agriculture and predict the range of parameters which result in the best growth of the crops.

*Keywords:* Supervised Machine Learning Algorithms, Regression Models, Controlled Environment, Hydroponic, Urbanization

## 1) Introduction

### 1.1) Theoretical Background

<sup>3</sup> Agriculture is the primary occupation in India and is the backbone of Indian economic system. Agriculture provides employment opportunities to rural people on a large scale in underdeveloped and developing countries in addition to providing food. It is the process of producing food, fibre and many other desired products by the cultivation and raising of domestic animals. Agriculture is the primary source of livelihood for about more than 58% of India's population.

### 1.2) Motivation

As the population of the city grows significantly the need to feed the city heavily lays on the need of agricultural land. As most of the agriculture lands are dried up due to lack of water the need for starvation increases. Hence cities have to start cultivating crops and the need for automated farming in cities becomes crucial.

Climate changes will have a significant impact on agriculture by increasing water demand and limiting crop productivity in areas where irrigation is most needed.

<sup>3</sup> Irrigation system, rain fed agriculture, groundwater irrigation are some of the methods introduced to produce healthier crops which may not use water efficiently. In order to use water efficiently a smart system is designed. In the system farmers need not make the water flow into fields manually, but the system automatically does that efficiently.

Cities	2001	2011	2016*	2030**	Annual Growth rate	
					2001-2011	2016-2030
Mumbai UA	16.43	18.39	21.36	27.80	1.19	1.9
Delhi UA	12.90	16.35	26.45	36.06	2.68	2.2
Kolkata UA	13.25	14.06	14.98	19.09	0.61	1.7
Chennai UA	6.69	8.65	10.16	13.92	2.94	2.2
Bangalore UA	5.70	8.52	10.46	14.76	4.94	2.5
Hyderabad UA	5.76	7.68	9.22	12.77	3.34	2.3

Data source: Census of India, United Nations, Department of Economic and Social Affairs, Population Division (2014). World Urbanization Prospects: The 2014 Revision.

\*UNESA- PD

\*\* UNESA - PD Projection

Figure 1:Food requirements In India Across States

**Table 1: Population Density of Indian Metropolitan Cities**


No.	City	Corporation	Population (In Lakhs)	Area (sqkm)	Density (pph)	Core Area Density (pph)	Core Area (In sq.km)
1	Mumbai	MCGM	124.78	437	286	460	67.7*
2	Kolkata	KMC	44.96	205	219	219	205
3	Chennai	GCC	67.27	426	157	270	176**
4	Bengaluru	BBMP	84.25	712	118	214	216***
5	Delhi	MCD	164.19	1397	118	391	22.74****
6	Hyderabad	GHMC	67.31	650	104	232	172.6*****

\*South Mumbai


*Figure 2:Population Density of Indian Cities*

#### WORLD HUNGER INDEX - HOW INDIA COMPARES

India state hunger index score

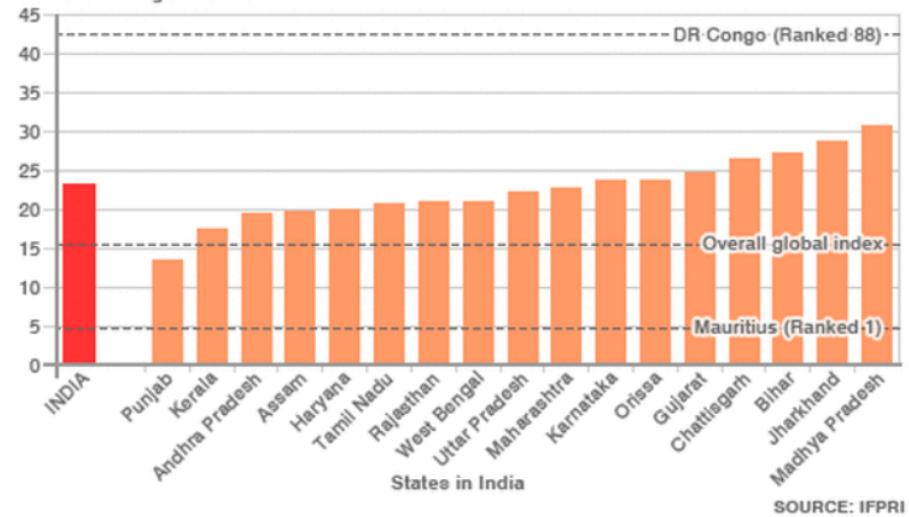

*Figure 3:World Index Hunger across Indian States*

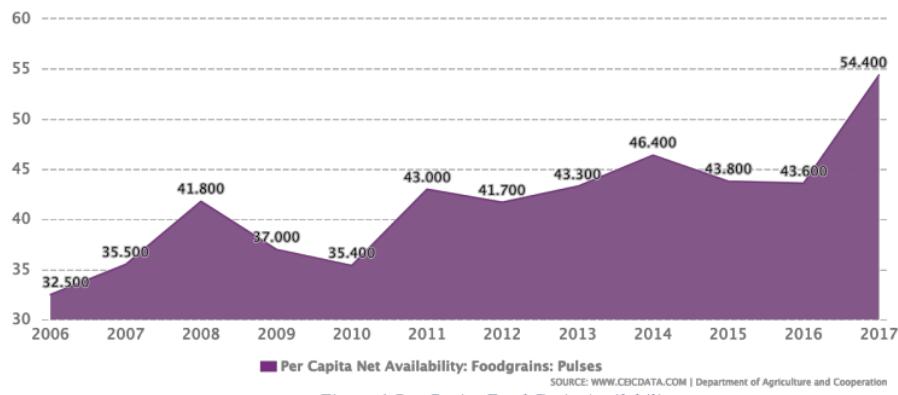

*Figure 4:Per Capita Food Grain Availability*

### **1.3) Aim of the proposed Work**

<sup>3</sup>  
The traditional methods practiced by people may result in huge wastage of water. Hence, the concept of robotized farming with a mix of IoT has been developed. The technological advancements began to increase the efficiency of production remarkably thus, making it a reliable system. The knowledge of properties of soil determines the water supply to be driven in a smart way. The practice of agriculture in a smart way helps to acquire knowledge of soil and temperature conditions. Developing the smart agriculture using IoT based systems not only increases the production but also avoids wastage of water

### **1.4) Objective of the proposed work**

<sup>22</sup>  
The main objective of our work is to find and show the correlation between various parameters take into account while growing a crop through hydroponic agriculture and predict the range of parameters which result in the best growth of the crops.

### **1.5) Report Organization**

In our project we have implemented a hydroponic system to cultivate coriander crop where we are collecting data parameters such as ph value, temperature, humidity, soil moisture, and water level in the system. We are planning to collect data till the plant reaches its full growth and we will be analyzing the trends in data using regression model and data analysis. After analyzing the data, we will be able to implement a prototype that can help people grow crops in cities through automation and improve more cultivation in urban areas. Hydroponic systems are going to become the future of agriculture in urban areas and help farmers to reduce the burden to provide food to urban regions.

## **2) Literature Survey**

### **2.1) Survey of the Existing Models and Works**

S.N o	Title	Authors	Methodologies Used	Drawbacks and Future Works
1	① Data Acquisition and Actuation for Aquaponics using IoT	Akhil Nicani, Sayantan Saha, Tushar Upadhyay, A. Ramya, Maulin Tolia	① Multi-Level IOT framework, which uses Application Layer, Internet Layer, Sensor and Actuator Framework along with Distribution middleware and follows MQTT protocol.  In the output, the End User Experiences VPS interaction in one aspect and in the other aspect, it uses VPS and Local Server Interaction	This work falls back in implementing limiting factors such as nitrate, nitrate and ammonia via the electronic sensors.  Automated data collection can be implemented into this work so that the system can function with better efficiency and maybe it could send alerts to the sender if there is any change or drastic changes in the parameters.
2	An eye on hydroponics: The IoT initiative	②6 Jositha C, P Kanakaraja, Sarath Kumar, Polavarapu Akanksha, Guduru Satish	① The paper focuses on five main concepts, namely Hydroponics, Need for Automation Control, Climate Statistics, Data Analytics and Cloud, Proposed System.  The sensors record analog Data through Hydroponic system with the help of MCP 3008 ADC.	This work acts as an eye mainly to farmers but this technology can sometimes act more of a ban than a boon for the farmers.  This work is done solely done on the farmer end so, it can be implemented in other factors as well
3		Srivani P,		

9	<p>A Controlled Environment Agriculture with Hydroponics: Variants, Parameters, Methodologies and Challenges for Smart Farming</p>	<p>Yammuna Devi C, Manjula S H</p>	<p>The most innovative and peculiar aspect of this work is the growth of crops in an Controlled Environment Agricultural System(CEA) rather than the natural growth environment for the best growth. Uses a four step architecture in which Sensor system, Data Processing System, Communication Device and Cloud Storage systems are used.</p>	<p>The major drawback of this work is the usage of CEA which stands for Controlled Environment Agriculture System.</p> <p>Due to this, even though the work uses multiple regression models to predict the best conditions, it will not always give the best results as the criteria set are standard and always idealistic.</p> <p>As it is set for Controlled environment, the power usage will be very high and can't be implemented on a large scale.</p>
4	<p>Predictive models for Lettuce quality from Internet of Things-based hydroponic farm.</p>	<p>Sethavidh Gertphol, Pariyanuj Chulaka, Tanabut Changmai</p>	<p>This paper works on the growth of Lettuce in a controlled environment with the help of IoT. In a market where lettuce is not a commodity but a luxury. RMSE is one of the model used for model selection. SVR, MLR and ANN are used for each weeks prediction. They used SCIKIT in four steps, namely</p>	<p>1 Feature Selection has not yet been used in the creation of the machine learning model in this study. As a result, the outcome was less than satisfactory. The lettuce was standing straight one day and swaying to the side the next due to the blowing wind. Other errors were influenced by the amount of sunlight and temperature on that particular day. A lot of sunlight</p>

5	<p><sup>21</sup> A Study on IoT based Low-Cost Smart Kit for Coconut Farm Management</p> <p>S. Jaisankar, P.Nalini, K. Krishna Rubigha</p> <p>This work is concentrated on an innovative way to solve <sup>12</sup> problem which is specific to Coconut farm owners.</p> <p>A coco smart-kit is installed in every farm and it is linked to farmers smartphones.</p> <p>It is a theoretical solution which helps in solving the following <sup>12</sup> situations, Safeguarding the coconut trees from wild animals, Distribution of available water covering the fields, Preventing the pests from coconut trees.</p>	<p>Prepared Data and Normalising, Processing etc..</p> <p><sup>1</sup> causes the plant to wither and unfold. When measured on a day with less sunlight and temperature, the width is smaller than when measured on a day with more sunlight and temperature. Finally, these flaws caused the model to fail to produce a good learning result.</p>	<p>The main drawback of this work is the lack of experimentation, it is all in a theoretical stance so, scalability might be of major concern.</p> <p>For this to work, every farmer must own a smartphone which is practically not possible as the farmers are not inclined towards technology.</p> <p>For a total of 10 sensors, which include Fence alarm, Moisture sensor, Pest Sensor, Valve Control and GSM module, it costs Rs. 113.5 but in large scale, 10 sensors are not nearly enough to cover the whole field. With the help of generalising the</p>

coconut farm size in India, we would require around 1250 sensors which would cost around Rs 14000 for an Acer of Coconut farms which is not very cost effective.

6

9  
A Survey on the Role of IoT in Agriculture for the Implementation of Smart Farming

MUHAMMA  
D SHOAIB  
FAROOQ,  
SHAMYLA  
RIAZ,  
ADNAN  
ABID,  
KAMRAN  
ABID,  
MUHAMMA  
D AZHAR  
NAEEM

As it is a Survey paper, it takes a closer look at various paper and gives us an idea on various uses of IoT in agriculture across the globe. It talks about various agricultural Challenges such as the Hardware Challenges, Networking Challenges and the Networking Challenges.

Also discussed about various agricultural Security treats with IoT such as Confidentiality, Integrity, Authentication, Data freshness, Non repudiation, Authorisations, self-healing etc. along with Stack Challenges, Threat Models, Attack Taxonomy And so on

As the work is a literature Survey, there are no drawbacks per say

7

Nahina Islam,

<p><b>1</b></p> <p><b>IoT Based Smart Farming: Are the LPWAN Technologies Suitable for Remote Communication ?</b></p>	<p>Biplob Ray, Faezeh Pasandideh</p> <p>This work emphasises on the importance of IoT based technologies in agriculture. This paper works on the use of Low-Power Wide-Area Network(LPWA N) to reduce the power consumption and increasing the wireless range by eliminating the unnecessary dependency of third party and backhaul networks.</p> <p>It also describes the comparisons between Coverage Range, Quality of Service, Battery Life, Latency, Scalability, Payload Length and Development model between LPWAN technologies.</p>	<p>The only major drawback of the paper is the maintenance the LPWAN requires to keep it running as the technology used won't have the ideal conditions to run in an agricultural setup even though the batter life and power consumption are ideal.</p>
<p><b>8</b></p> <p><b>1</b></p> <p><b>IoT for Smart Farm: A Case Study of the Fertilizer Mixer Prototype</b></p>	<p>Sumarn Chaikhamwan g, Chalida Janthajirakowit ,</p> <p>Srinuan Fongmanee</p>	<p>The main research output of the work is to develop an application with the help of IoT to Control the fertilizer mixer. The work is split into two parts, being the hardware part which uses ESP32S platform for controlling</p> <p>The main drawbacks of this work are, when selecting the NPK values for the mixture, there is no option to shut off the process midway so, a shutoff valve can be implemented.</p> <p>The prototype made uses high grade plastic as it</p>

			devices and controlling applications and the software aspect helps the user to chose the right mixture of N-P-K by setting the required ratios of N,P and K.	doesn't react with the chemicals but Non-reactive metals can be used for durability.
9	18	Low-cost IoT+ML design for smart farming with multiple applications	Fahad K Sayed, Agniswar Paul, Ajay Kumar, Jaideep Cherukuri	<p>This work focuses on a model which maintains soil moisture level which is optimum for the crop growth. This level of soil moisture will be maintained constantly for the next 24 hours with no impact and consideration of the weather condition.</p> <p>This work also talks about smart irrigation system which helps in apt water management and provides ideal crop suggestions based on historic soil data.</p> <p>This work also provides the type and quantity of various minerals needed.</p>

Table 1: Tabular literature Survey

## **2.2) Summary and Gaps identified in survey**

1

Hydroponic farming is heavily dependent upon the water retention. The limited amount of water available will be retained with the help of a special soil mixture provided whose key role is to maintain the water level without losing the soil moisture.

A lot of work has already been done on the aspect of hydroponic farming. We have gone through various papers and found the following drawbacks and concepts.

Feature Selection has not yet been used in the creation of the machine learning model in this study. As a result, the outcome was less than satisfactory. The lettuce was standing straight one day and swaying to the side the next due to the blowing wind. Other errors were influenced by the amount of sunlight and temperature on that particular day. A lot of sunlight causes the plant to wither and unfold. When measured on a day with less sunlight and temperature, the width is smaller than when measured on a day with more sunlight and temperature. Finally, these flaws caused the model to fail to produce a good learning result.

This work focuses on a model which maintains soil moisture level which is optimum for the crop growth.

This level of soil moisture will be maintained constantly for the next 24 hours with no impact and consideration of the weather condition. This work also talks about smart irrigation system which helps in apt water management and provides ideal crop suggestions based on historic soil data.

This work also provides the type and quantity of various minerals needed. This work does not talk about the plant diseases, this can further be extended so as to detect diseases and automated dispersal of pesticides and insecticides.

This work emphasizes on the importance of IoT based technologies in agriculture. This paper works on the use of Low-Power Wide-Area Network(LPWAN) to reduce the power consumption and increasing the wireless range by eliminating the unnecessary dependency of third party and backhaul networks. It also describes the comparisons between Coverage Range, Quality of Service, Battery Life, Latency, Scalability, Payload Length and Development model between LPWAN technologies. The only major drawback of the paper is the maintenance the LPWAN requires to keep it running

as the technology used won't have the ideal conditions to run in an agricultural setup even though the battery life and power consumption are ideal.

Multi-Level IOT framework, which uses Application Layer, Internet Layer, Sensor and Actuator Framework along with Distribution middleware and follows MQTT protocol. In the output, the End User Experiences VPS interaction in one aspect and in the other aspect, it uses VPS and Local Server Interaction. This works falls back in implementing limiting factors such as nitrate, nitrate and ammonia via the electronic sensors. Automated data collection can be implemented into this work so that the system can function with better efficiency and maybe it could send alerts to the sender if there is any change or drastic changes in the parameters.

The paper focuses on five main concepts, namely

Hydroponics, Need for Automation Control, Climate Statistics, Data Analytics and Cloud, Proposed System.

The sensors record analog Data through Hydroponic system with the help of MCP 3008 ADC. This work acts as an eye mainly to farmers but this technology can sometimes act more of a ban than a boon for the farmers. This work is done solely done on the farmer end so, it can be implemented in other factors as well.

### **3) Overview of Proposed System**

#### **3.1) Introduction**

In the following proposed system, the analog and digital sensors collect information from the hydroponic setup. With the help of Arduino Mega 2560 data is sent to spreadsheet in a very smooth and effective manner. The data is collected and saved in database using a wifi module. The block figure is represented for the proposed system.

An innovative form of hydroponic farming is used. A coco pit is used as an soil replacement as the water retention capacity is much higher in this compared to general soil. The coco pit is connected to water supply which is regulated. Six different sensors are connected to the system. The sensors being, pH sensor which monitors the pH of the water in the coco pit. The water in coco pit pH initially at the time of laying it down was 6.5. The second sensor used is Luminous Intensity Sensor. This sensor monitors the amount of luminescence around the setup. The third sensor is Humidity sensor, this

sensor monitors the humidity in the surroundings of the setup. Next sensor used was temperature sensor, this sensor monitors the temperature of the surroundings. The fifth sensor used was soil moisture sensor, this sensor measured the amount of moisture in coco pit throughout the experiment. The final sensor used is water level sensor, this sensor measures the amount of water provided to the system daily. The seeds used were coriander seeds as they take less time to grow which afforded us a chance to cross verify the results by repeating the experiment.

### **3.2) Proposed System**

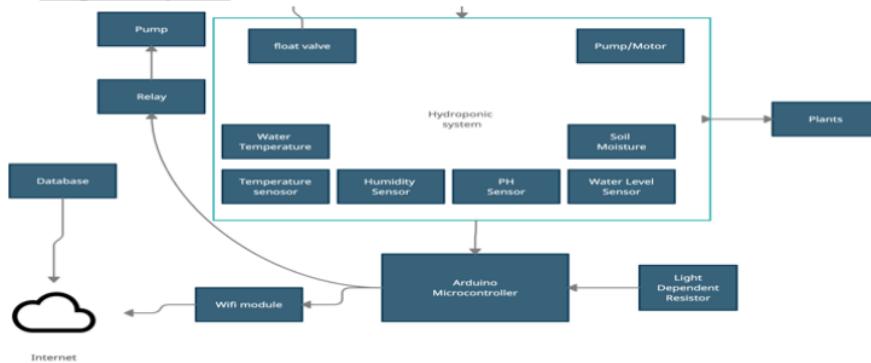


Figure 5 :Architecture Diagram

### **1 Hydroponic Farming**

In the present fast pace world, the form of hydroponic farming is taking over. The ongoing research paved new ways and paths for a better and substantial way of farming. Noticing the ways and researching the present trends, mainly followed in metropolitan cities and technologically advanced countries makes lives a lot easier in terms of hydroponic farming.

The work done by us addresses the key issues of automation and IoT integration into the way of sustainable farming in constraints such as limited water supply and space.

23

**Water-Level Sensor :** A water-level sensor is a device used in the detection of the water level. Maintaining Water level helps the root absorb correct amount of water and makes sure that the plant doesn't gets spoiled.

**8**  
**pH Sensor** : Optimal pH levels are critical to healthy plants and high yields in both soil and hydroponics gardening. Maintaining those optimal levels, especially in soilless growing systems, calls for frequent, accurate pH testing. Ideal pH levels maximize a plant's nutrient uptake. Those nutrients, in turn, increase a plant's vigor and productivity.

**6**  
**Soil Moisture Sensor** : This soil moisture sensor can be used to detect the moisture of soil or judge if there is water around the sensor, let's you know if the plants in the mesh pot require water or not. The units used in calculating is bars.

**6**  
**DHT22 Temperature/Humidity Sensor** : The DHT22 is a humidity and temperature sensor with a single wire digital interface. The sensor is calibrated so you can get right to measuring relative humidity and temperature.

**1**  
**Luminous Intensity Sensor** : Helps to capture the amount of sunlight hitting the product

### 3.3) Proposed system model

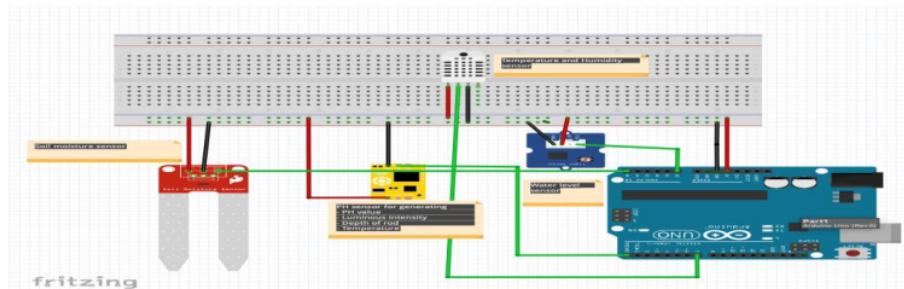


Figure 6:Circuit Diagram of System

#### Sensor connection from Arduino

SENSOR	FROM	TO
PH SENSOR	TX	RX
	VCC	VCC
	GND	GND
DHT 22	VCC	VCC
	GND	GND
SOIL MOISTURE	DATA	A1
	VCC	VCC

	GND	GND
<b>WATER LEVEL SENSOR</b>	DATA	A2
	VCC	VCC
	GND	GND

Table 2:Pin Diagram for Circuit

13

## 4) Proposed system Analysis and Design

### 4.1) Introduction

1

The work being done needs constant monitoring as various sensors are used in an confined and controlled environment. As pre-processing homo sapiens , we tend to make unavoidable errors in our work. To avoid such mistakes that in other ways cannot be avoided, automation is the way.

### 4.2) Requirement Analysis

1

With the help of Arduino , ESp 8266 and ard Spread Sheet the reading from the sensors are directly stored into the spreads sheet with almost no error. The readings are recorded once every 10 minutes which without automation requires a immense amount of man power which intern may lead to loss or errors in recorded results.

Farming mainly depends on ambient climatic conditions but the city environment is not suitable for the growth of crops in the traditional way.

For our work as we targeted the metropolitan cities we made sure that the temperature rage varied from 28 degree Celsius to 36 degree Celsius. In hydroponic farming, the crops are not exposed to sunlight throughout. Rather than exposing them to sunlight throughout, we made sure that an adequate sunlight was available which in the day reaches approximately 240 candela and in the night for the integrity of the results, we made sure no light from any source was available which resulted in 0 candela.

Speaking about the soil moisture, for better understating of the impact of moisture retention of the soil we grew the crops in early summer because of which there is humidity in the air than normal. The humidity varied from 40 percent to 80 percent which is the normal range in a coastal city.

1

All the information collected from the sensors is stored in the personal systems directly rather than cloud as cloud is heavily dependent upon an uninterrupted internet connection which sometimes may not be possible.

The data collected is stored and processed with the help of python to create results which help in better understanding of the data.

4

#### 4.2.1) Functional Requirements

##### *4.2.1.1) Product Perspective:*

The product is aimed to assess and predict the best possible scenarios which help in the growth of the crops with good yield. This can mainly be used to know the optimal conditions to grow the crops in restricted conditions especially in a city environment. The key aspect of this work is predicting the optimal condition for growth when few parameters are already bound.

##### *4.2.1.2) Product Features*

This work has features like an automated irrigation system, which as the name suggests automatically supplies water and other essential nutrients for plant growth once set up. The other features are predicting optimal requirements with the help of regression models and correlation when one or more of the parameters are bound.

##### *4.2.1.3) User Characteristics*

The user gets an interface in which he or she can enter the bound variables and set some required parameters which the automated system takes into account and does the rest.

##### *4.2.1.4) Assumption and Dependencies*

This work makes an assumption that the user has at least a minimal knowledge on the dos and don'ts of farming and how to use, read and setup sensors required.

##### *4.2.1.5) Domain Requirements*

The work done requires the automated irrigation system to cut out the supply when the readings are not in the optimal range. It also has an app which has controls that stops the system when required.

##### *4.2.1.6) User Requirements*

The user is required to have uninterrupted power supply to the system as any power loss wouldn't damage the system but would lead to loss in the readings. Also, the user must have a smart which will give him constant updates and control over the system.

#### 13 4.2.2) Non Functional Requirements

##### 4.2.2.1) *Efficiency*

The efficiency of the system can not be counted as a whole but can be counted when correlated with other parameters, it can be calculated as four terms. The parameters that are correlated are then made into a set for the better result of the growth.

##### 4.2.2.2) Reliability

The model has a very good reliability for a prototype. When considering the data set, around 30 odd seeds were planted out of which around 22 seeds gave yield which generally means 70% efficiency and pretty high reliability.

##### 4.2.2.3) Portability

As this project is highly revolving around farming, portability is next to impossible. But, the setup of sensors and actuators used for taking readings is very portable. It is just a set of sensors and a smartphone.

#### 4.2.3) System Requirements

##### 4.2.3.1) *Hardware Requirements*

- 1 • Arduino Mega 2560
- Temperature sensor (DHT-22)
- Humidity Sensor (DHT-22)
- Water Level Sensor
- Soil Moisture Sensor
- PH Sensor
- Luminous Intensity Sensor
- WIFI module (ESP 8266)
- Breadboard
- Jumper wires
- Pump
- Water Tube

- 5V motor
- 5V power supply

#### 4.2.3.2) Software Requirements

- Python Version 3.9.0
- Sklearn (Machine learning Library and Evaluation )
- Pandas (Handling CSV files)
- Numpy (Handling Arrays in python)
- Arduino Software (To upload code to UNO board)
- MAC OS version 11.6 128GB storage
- VS code editor

1

## 5) Results and Discussion

The main objective of the result is to corelate the various parameters of the experiments with the help of four evaluation parameters, namely

- Mean Absolute Error (MAE)
- Root Mean Square Error (MASE)
- Root Mean Square Log Error (RMSE)
- R Squared(R2)

The lower the value of MAE, the more the parameters are corelated. The R2 specifies the error in the calculations I,e the lesser the value of R2, the better the correlation is.

1

### 5.1) Dataset and dataset analysis

All the information collected from the sensors is stored in the personal systems directly rather than cloud as cloud is heavily dependent upon an uninterrupted internet connection which sometimes may not be possible.

The data collected is stored and processed with the help of python to create results which help in better understanding of the data.

Analysis of phase 1 (planting phase)

Range of parameters

PARAMETER	MAX	MIN

<b>PH</b>	8.37	4.23
<b>LUMINOUS INTENSITY</b>	228	0
<b>HUMIDITY</b>	76.2	50.3
<b>TEMPERATURE</b>	34.6	25.5
<b>SOIL MOISTURE</b>	687	676
<b>WATER LEVEL</b>	252	161

Table 3:Range of parameters Phase-1

#### Dataset Description

<b>Type</b>	<b>DESCRIPTION</b>
<b>Data set Characteristic</b>	Multivariant
<b>Attribute Characteristics</b>	Timestamp, Integer, Real
<b>Associated Tasks</b>	Regression
<b>Number of Instances</b>	469
<b>Number of attributes</b>	841

Table 4:Dataset Description Phase-1

#### Attribute Information

- 1) Day(1-28)
- 2) Timestamp(HH:MM:SS)
- 3) Ph value
- 4) Luminous intensity
- 5) Humidity
- 6) Temperature
- 7) Water level
- 8) Soil Moisture

#### Analysis of phase 2 (Growing phase)

#### Range of parameters

<b>PARAMETER</b>	<b>MAX</b>	<b>MIN</b>
<b>PH</b>	27.13	6.68
<b>LUMINOUS INTENSITY</b>	226	0
<b>HUMIDITY</b>	82.5	47.8
<b>TEMPERATURE</b>	38.6	25.7
<b>SOIL MOISTURE</b>	687	579
<b>WATER LEVEL</b>	731	153

Table 5:Range of parameters Phase-2

#### Dataset Description

<b>TYPE</b>	<b>DESCRIPTION</b>
<b>Data set Characteristic</b>	Multivariant
<b>Attribute Characteristics</b>	Timestamp, Integer, Real
<b>Associated Tasks</b>	Regression
<b>Number of Instances</b>	841

<b>Number of attributes</b>	<b>8</b>
-----------------------------	----------

Table 6:Dataset Description Phase-2

#### Attribute Information

- 1) Day(1-28)
- 2) Timestamp(HH:MM:SS)
- 3) Ph value
- 4) Luminous intensity
- 5) Humidity
- 6) Temperature
- 7) Water level
- 8) Soil Moisture

#### Analysis of phase 3 (Harvesting phase)

#### Range of parameters

PARAMETER	MAX	MIN
PH	12.59	0
LUMINOUS INTENSITY	220	0
HUMIDITY	72.7	43.6
TEMPERATURE	36.3	27.7
SOIL MOISTURE	685	676
WATER LEVEL	661	272

Table 7:Range of parameters phase-3

#### Dataset Description

14 PE	DESCRIPTION
Data set Characteristic	Multivariant
Attribute Characteristics	Timestamp, Integer, Real
Associated Tasks	Regression
Number of Instances	250
Number of attributes	8

Table 8:Dataset description Phase-3

#### Attribute Information

- 1) Day(1-28)
- 2) Timestamp(HH:MM:SS)
- 3) Ph value
- 4) Luminous intensity
- 5) Humidity
- 6) Temperature
- 7) Water level
- 8) Soil Moisture

#### Analysis of full phase of data

### Range of parameters

PARAMETER	MAX	MIN
PH	27.13	0
LUMINOUS INTENSITY	228	0
HUMIDITY	82.5	43.6
TEMPERATURE	38.6	25.5
SOIL MOISTURE	693	676
WATER LEVEL	731	153

Table 9:Range of parameters full data

### Dataset Description

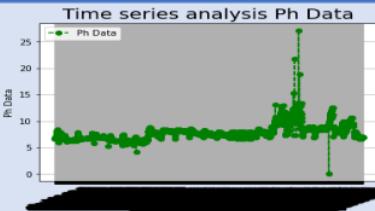
TYPE	DESCRIPTION
Data set Characteristic	Multivariant
Attribute Characteristics	Timestamp, Integer, Real
Associated Tasks	Regression
Number of Instances	1559
Number of attributes	8

Table 10:Range of Parameters full data

### Attribute Information

- 1) Day(1-28)
- 2) Timestamp(HH:MM:SS)
- 3) Ph value
- 4) Luminous intensity
- 5) Humidity
- 6) Temperature
- 7) Water level
- 8) Soil Moisture

### 5.2) Linear Variation between parameters in dataset


PARAMETERS	CHART	OBSERVATION
PH		<ul style="list-style-type: none"><li>The minimum value recorded is 5.5 on the ph scale and this was recorded during the initial phase of the experiment.</li><li>The maximum</li></ul>

recorded is 13 and it was recorded during the growth phase due to the addition of mineral water to the water supply, it became more basic.

- After the growth phase we supplied general water again so, the pH dropped gradually making it more neutral.
- Ideally the crop grows in soil's with a PH value of 7-8 which has been followed in the hydroponic system.

- The least recorded is Zero as during the night, it is made sure that the experimental setup is not exposed to any form of light energy.

#### LUMINOUS INTENSITY

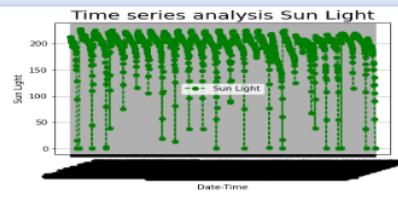


		<ul style="list-style-type: none"> <li>- The highest value recorded is around 250 candelas during the day.</li> <li>- The recorded values only account for the amount of sunlight received by the crop.</li> <li>- Ideally the crops grown in field receives sunlight from 225-250 candelas which has been the case for an hydroponic system as well.</li> </ul>
HUMIDITY		<ul style="list-style-type: none"> <li>1</li> <li>• The humidity in the surroundings of the setup.</li> <li>• As the experiment setup was in a coastal city, the humidity is relatively high but is under the normal humidity levels for the city.</li> <li>• The lowest recorded is 45% and the</li> </ul>

highest is around 80%.  
• To make sure that the humidity level doesn't go overboard, we conducted the experiment during early summer.

1

- The temperature kept on raising during the experiment gradually.
- The lowest recorded temperature was 26 degree Celsius and highest was 36 degree Celsius.
- The lowest average temperature was during the initial phase and the highest average was during the harvesting phase.
- The ideal temperature for crops to grow is 28-32 degrees

## TEMPERATURE

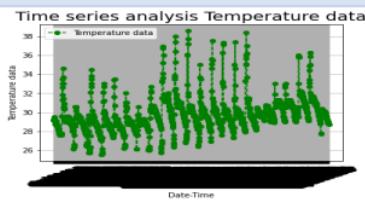


which has been mostly observed in our system.

1

- During the initial phase the moisture level was between 682-686.
- The moisture level was highest during the growth phase which ranges between 680-692.
- The moisture level during the harvest phase is lowest in terms of average, its range varies from 676-680.
- Soil moisture is normally very high in a hydroponic system and even with high temperature the coco pit was able to retain moisture and keep the soil moisture constant throughout

## SOIL MOISTURE

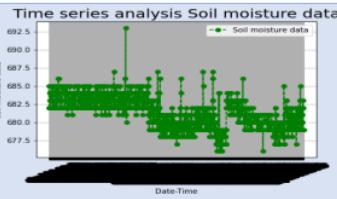

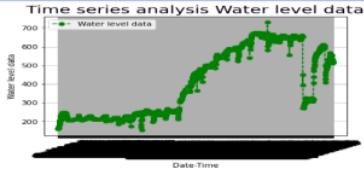
		the growth of the crop.
<b>WATER LEVEL</b>	 <p>The graph titled "Time series analysis Water level data" plots "Rate of flow" (Y-axis, 200 to 700) against "Date-Time" (X-axis). The data points, represented by green dots, show a general upward trend with some fluctuations. A solid black line represents a fitted curve. The water level starts around 200 ml, rises to about 650 ml during the growth phase, and then decreases again.</p>	<p style="text-align: center;">1</p> <ul style="list-style-type: none"> <li>The water level gradually increases till the growth phase and decreases there on.</li> <li>The water level during the initial phase was between 160 and 240ml, during growth phase it is between 200ml and 650ml.</li> <li>During the harvest phase, the water level required is low , it ranges from 200-500ml.</li> <li>The trends were similar to crops grown in fields hence it will be ideal for plants to grow easily In a city based hydroponic system.</li> </ul>

Table 11:Linear variation of parameters with respect to time

#### Variation of PH with other parameters

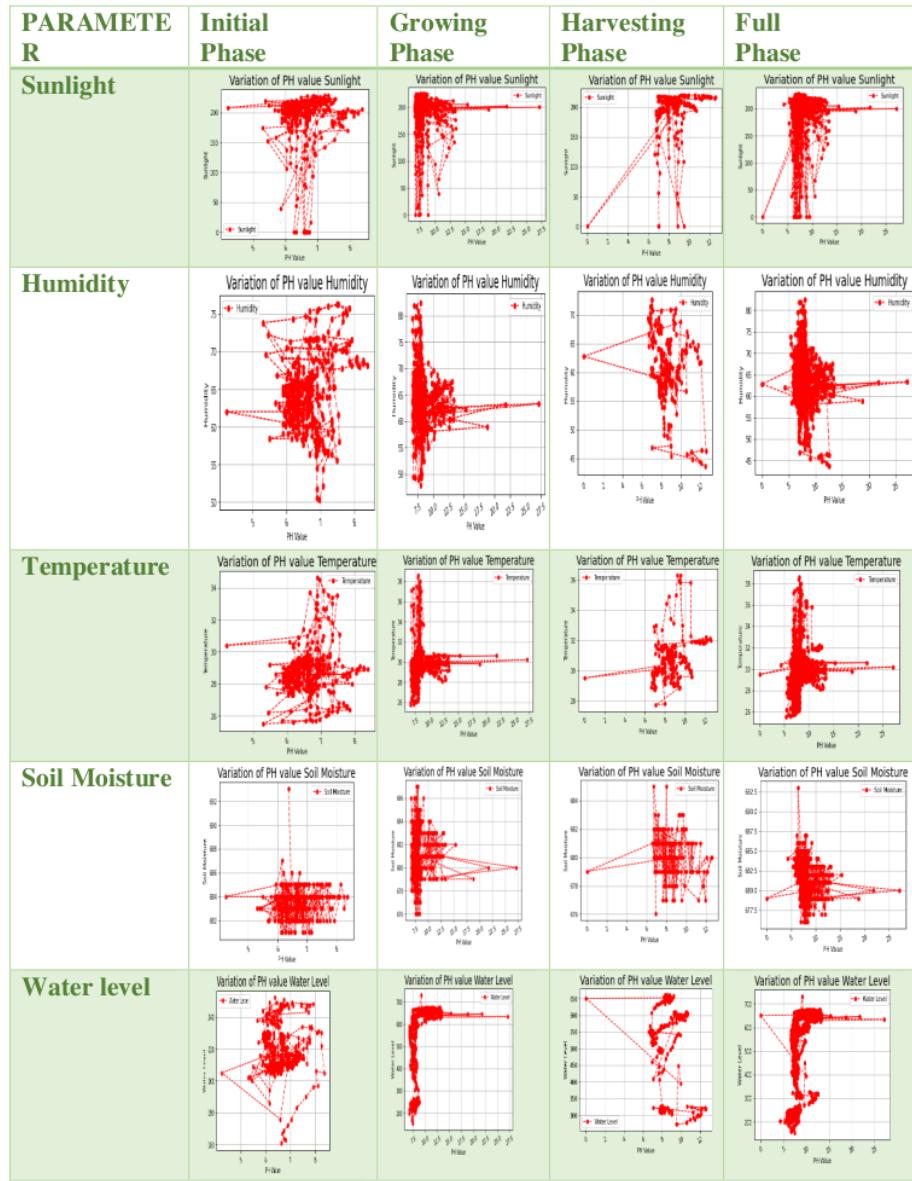


Table 12:Linear variation of Ph with other parameters

#### Variation of Water Level with other parameters

PARAMETER	Initial Phase	Growing Phase	Harvesting Phase	Full Phase
-----------	---------------	---------------	------------------	------------

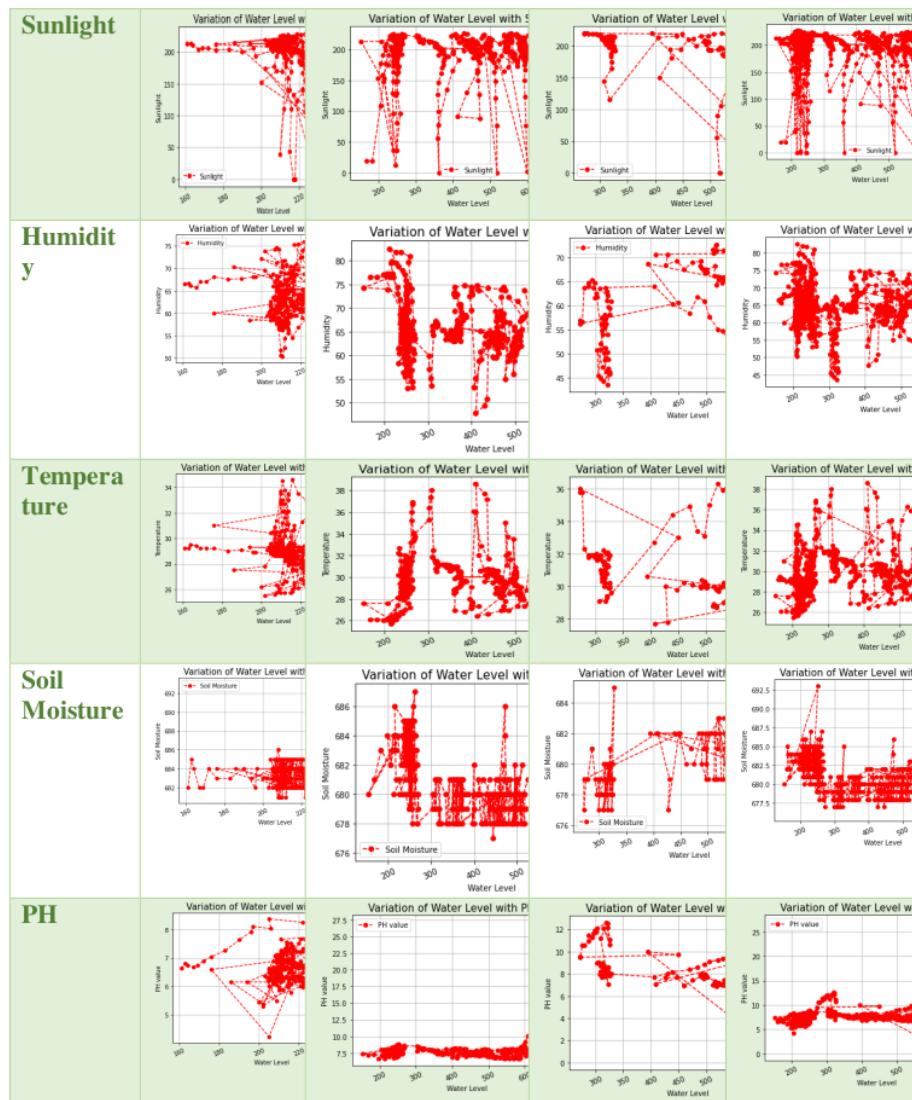
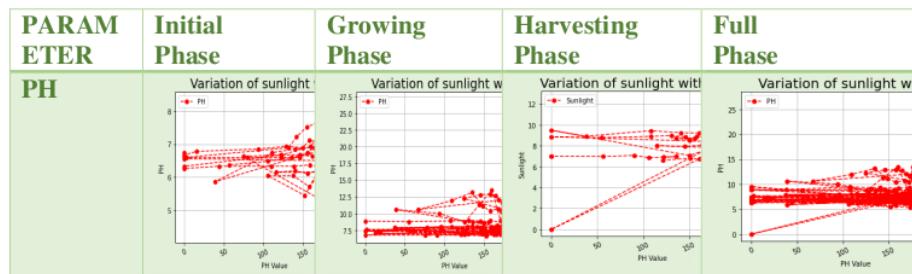


Table 13:Linear Variation of water level with other parameters

#### Variation of Sunlight with other parameters



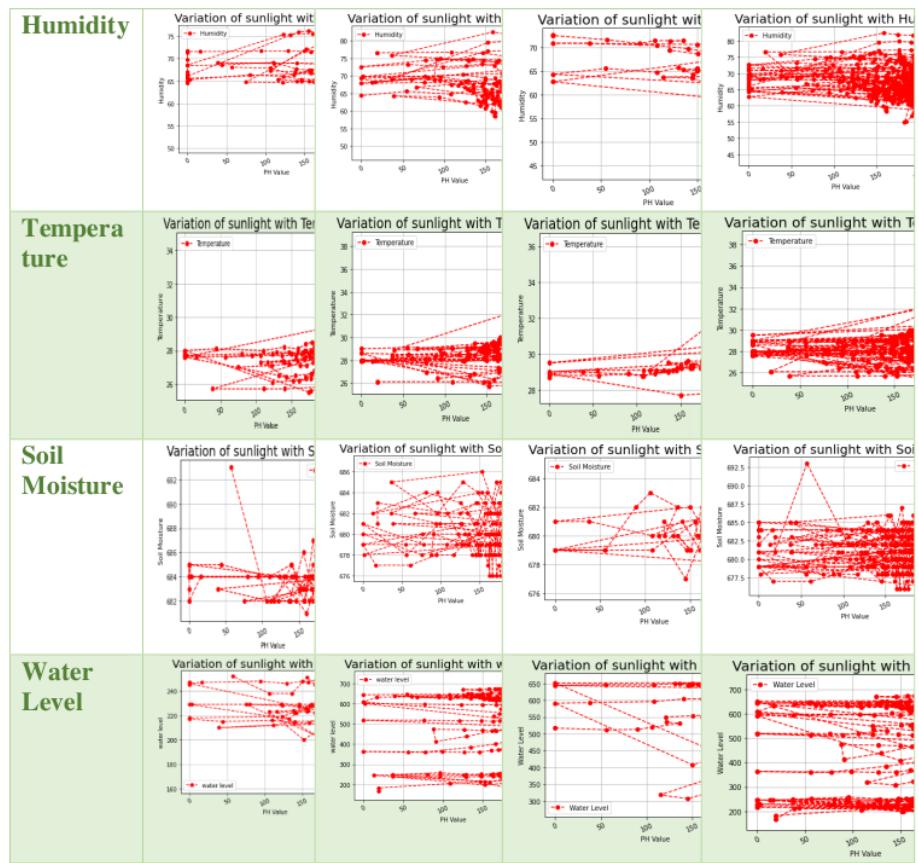
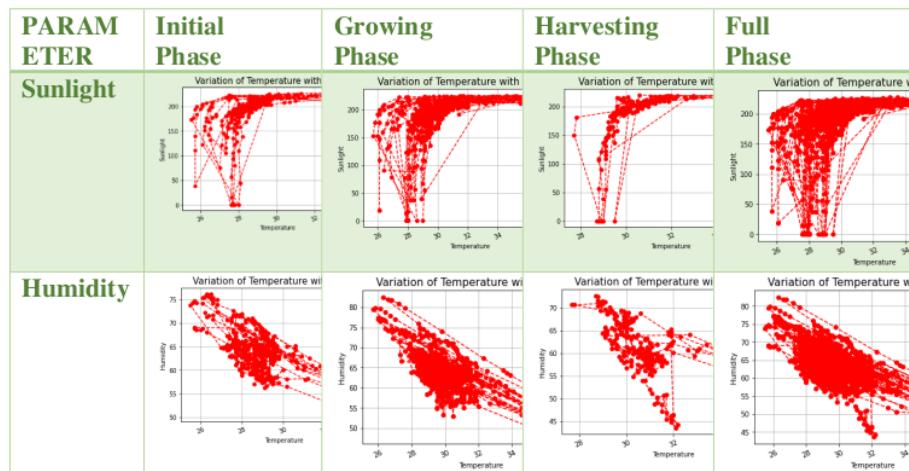


Table 14:Linear variation of sunlight with other parameters

### Variation of Temperature with other parameters



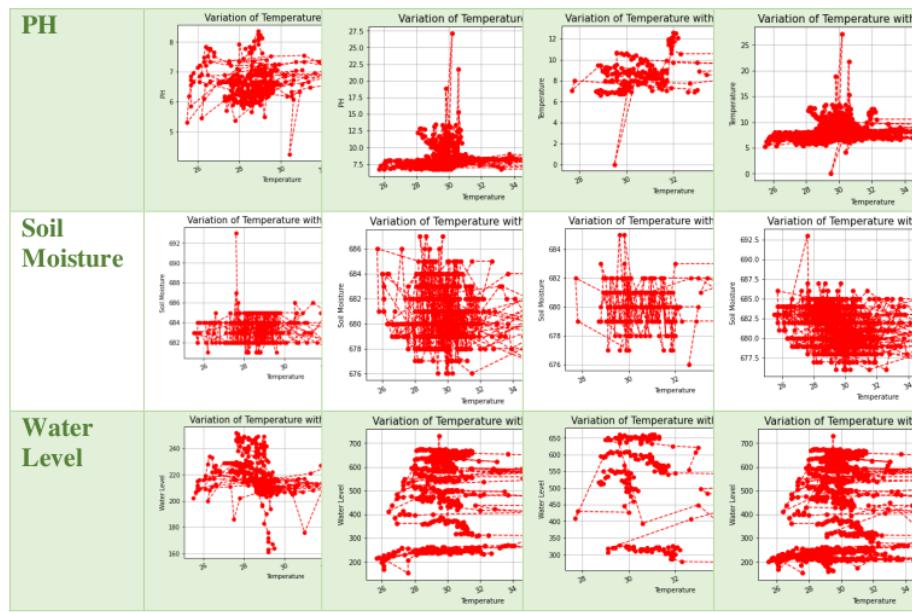
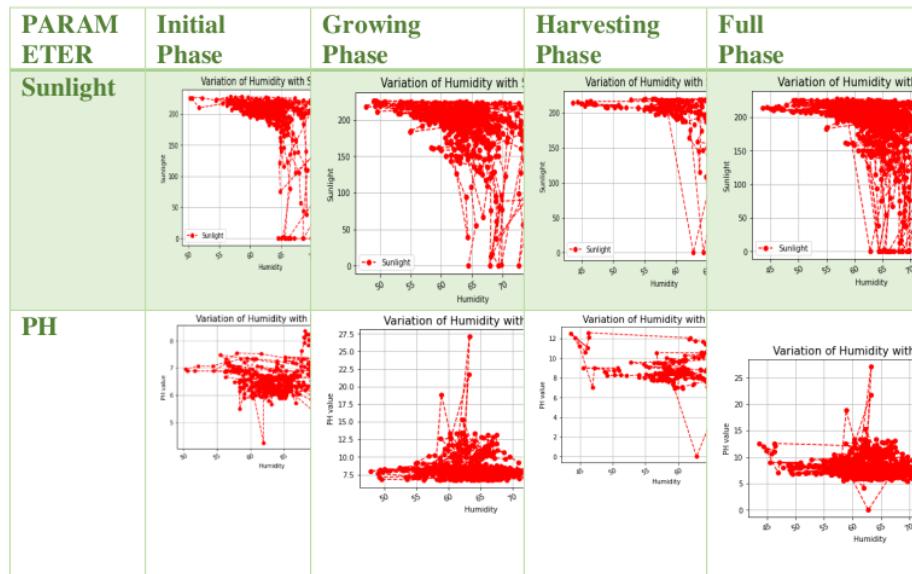


Table 15:Linear variation of temperature with other parameters

#### Variation of Humidity with other parameters



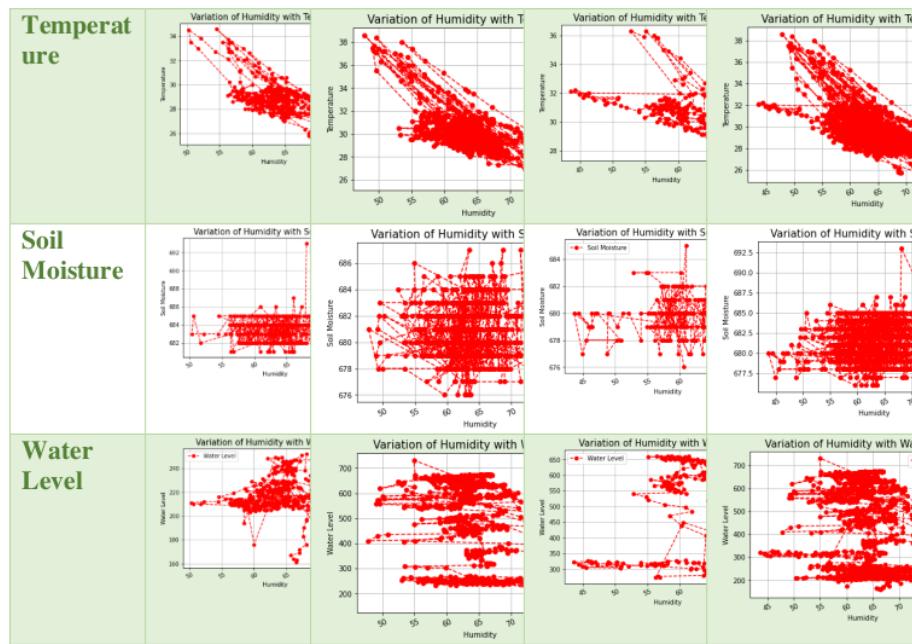
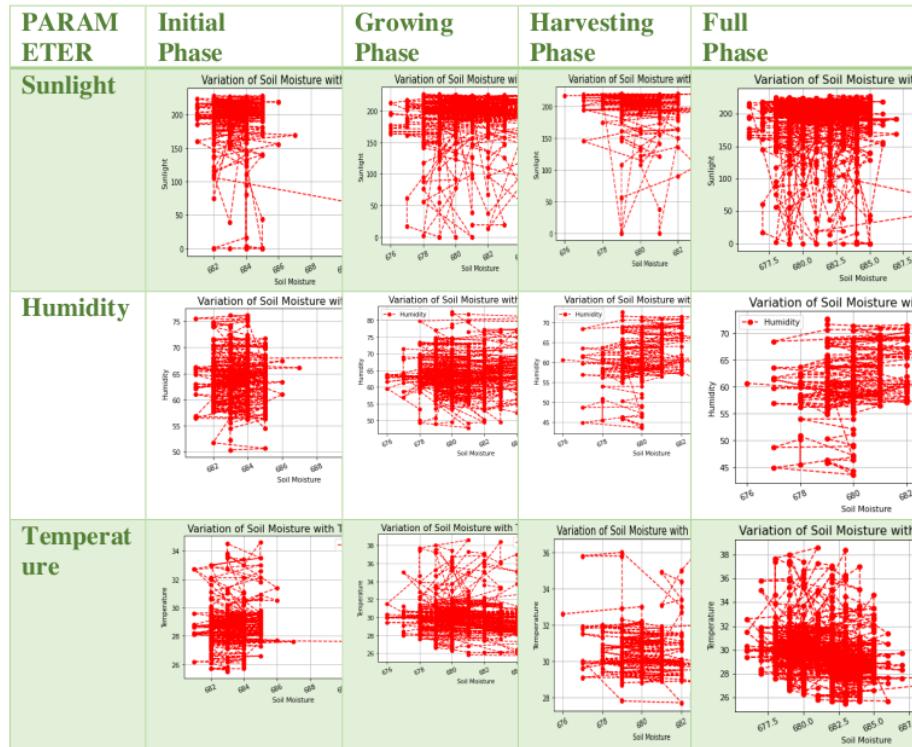


Table 16:Linear variation of humidity with other parameters

### Variation of Soil Moisture with other parameters



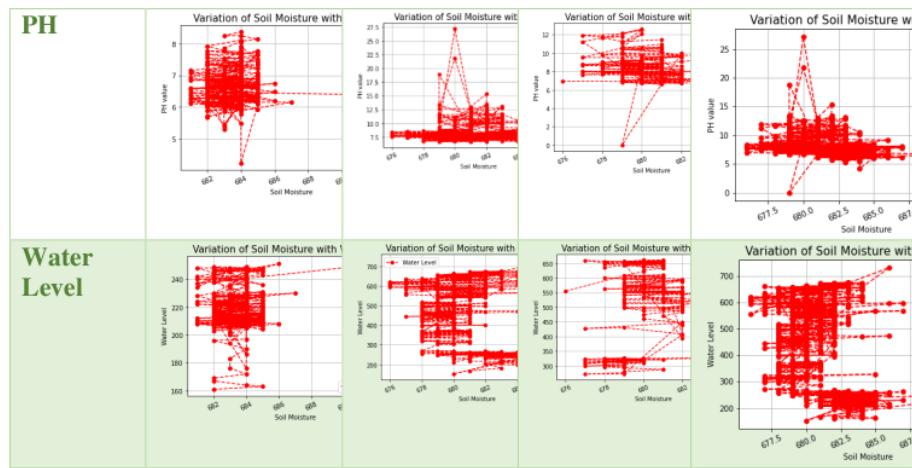


Table 17:Linear variation of soilmoisture with other parameters

### 5.3) Predictive Analysis of parameters using Linear Regression

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOILMOISTURE	WATER LEVEL
PH	X	MAE=26.54 MASE=1.702.59 RMSE=4.126 R2=-0.00288	MAE=3.13 MASE=1.7055 RMSE=4.1298 R2=-0.03718	MAE=0.9522 MASE=2.0584 RMSE=4.3474 R2=-0.003785	MAE=0.9161 MASE=1.1950 RMSE=1.0931 R2=-0.011836	MAE=11.9423. MASE=233.031 RMSE=15.265 R2=-0.0039
SUNLIGHT	MAE=0.3905 MASE=0.2885 RMSE=0.5371 R2=-0.00707	X	MAE=2.9133 MASE=16.551 RMSE=4.0683 R2=-0.0650	MAE=0.7492 MASE=1.268 RMSE=1.126 R2=-0.145	MAE=0.902 MASE=1.160 RMSE=1.077 R2=-0.0417	MAE=1.0388 MASE=1.521 RMSE=1.233 R2=-0.078
HUMIDITY	MAE=0.3817 MASE=0.253 RMSE=0.503 R2=-0.0074	MAE=21.29 MASE=1630.14 RMSE=40.375 R2=-0.157	X	MAE=0.831 MASE=1.205 RMSE=1.097 R2=-0.517	MAE=0.875 MASE=1.06 RMSE=1.033 R2=-0.0056	MAE=9.843 MASE=174.68 RMSE=13.21 R2=-0.0941

<b>TEMPERATURE</b>	MAE=0.409 MASE=0.316 RMSE=.24762 R2=0.0032	MAE=.06 MASE=529.58 RMSE=9.109 R2=0.216	MAE=2.64 MASE=10.3 RMSE=3.214 R2=0.505	X	MAE=0.9160 MASE=1.190 RMSE=1.090 R2=-0.012	MAE=9.714 MASE=168.86 RMSE=12.99 R2=0.087
<b>SOILMOISTURE</b>	MAE=0.389 MASE=0.278 RMSE=0.527 R2=-0.0094	MAE=.12 MASE=1462.23 RMSE=.53.23 R2=0.0032	MAE=0.933 MASE=2.1119 RMSE=1.453 R2=0.0231	MAE=2.890 MASE=15.77 RMSE=3.97 R2=-0.018	X	MAE=1.212 MASE=229.93 RMSE=15.16 R2=-0.0049
<b>WATER LEVEL</b>	MAE=0.339 MASE=0.232 RMSE=0.4819 R2=0.021	MAE=22.450 MASE=1350.67 RMSE=36.75 R2=0.210	MAE=3.35 MASE=2.043 RMSE=1.4296 R2=0.0010	MAE=3.356 MASE=18.41 RMSE=4.29 R2=0.039	MAE=0.797 MASE=1.540 RMSE=5.1240 R2=0.0032	X

Table 18:Linear Regression Between Parameters for Initial Phase of Coriander Plant Growth

1

From Table 5, it can be inferred that water level and pH are the most correlated parameters in the initial phase of the experiment as MAE=0.339. This means, with a given Water Level, we can predict the value of pH required for a good yield. The parameters that cannot be correlated are pH and Sunlight as the MAE=26.54, this means that the value of Luminous intensity cannot be predicted with the pH level.

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOILMOISTURE	WATER LEVEL
<b>PH</b>	X	MAE=21.157 MASE=1228.42 RMSE=3.504 R2=-0.0048	MAE=3.400 MASE=21.329 RMSE=4.618 R2=-0.0108	MAE=1.155 MASE=3.1804 RMSE=1.783 R2=-0.0061	MAE=1.6315 MASE=3.9975 RMSE=1.999 R2=0.0096	MAE=136.46. MASE=23789.17 RMSE=154.2 R2=0.1199
<b>SUNLIGHT</b>	MAE=0.944 MASE=	X	MAE=3.309 MASE=	MAE=1.010 MASE=	MAE=1.556 MASE=3.	MAE=1.562 MASE=

	2.5054 RMSE= 5582 R2= 0.00005 23		20.457 RMSE= 4.522 R2=0.19 4	2.544 RMSE= 1.595 R2= 0.1704	836 RMSE= 1.958 R2=0.024 7	3.678 RMSE= 1.917 R2=0.033
<b>HUMIDITY</b>	MAE=0.9677 MASE= 2.328 RMSE= 1.525 R2=0.00 814	MAE=19.44 MASE= 1072.59 RMSE= 32.750 R2= 0.1304	X	MAE= 0.943 MASE= 1.686 RMSE= 1.298 R2= 0.5603	MAE=1.6009 MASE=3.845 RMSE=1.96 R2= 0.00245	MAE=134.715 MASE=24.155.87 RMSE=15.5.42 R2=0.1037
<b>TEMPERATURE</b>	MAE=0.8932 MASE= 1.6079 RMSE= 1.268 R2=- 0.0076	MAE=18.107 MASE= 888.58 RMSE= 9.80 R2= - 5	MAE=2.487 MASE= 10.05 RMSE= 3.171 R2= 0.563	X	MAE=1.780 MASE=4.511 RMSE=2.123 R2=- 0.0042	MAE=142.16 MASE=25.289.25 RMSE=15.9.02 R2=0.0057
<b>SOILMOISTURE</b>	MAE= 0.959 MASE= 2.385 RMSE= 1.544 R2= - 0.01081	MAE=19.289 MASE= 834.443 RMSE= 28.88 R2= - 37	MAE= 1.0317 MASE= 2.1168 RMSE= 1.454 R2= - 0.0373	MAE=3.3324 MASE=2.1.27 RMSE= 4.612 R2= - 0.00273	X	MAE=130.00 MASE=23.137.316 RMSE= 152.109 R2= 0.0110
<b>WATER LEVEL</b>	MAE= 0.886 MASE= 2.728 RMSE= 1.65 R2=0.11 17	MAE= 20.0011 MASE= 1183.82 RMSE= 34.406 R2= 0.0038	MAE= 1.563 MASE= 3.701 RMSE= 1.923 R2= 0.0199	MAE=3.494 MASE=2.0.4542 RMSE=4.5226 R2=0.0730.0017	MAE=1.173 MASE=2.624 RMSE=5.1.62 R2= 0.0017	X

Table 19:Linear Regression Between Parameters for Growing Phase of Coriander Plant Growth

1

From Table 6, it can be inferred that temperature and pH are the most correlated parameters in the growth phase of the experiment as MAE=0.8932. This means, with a given temperature, we can predict the value of pH required for a good yield. The parameters that cannot be correlated are temperature and water level as the MAE=142.16, this means that the value of Water level cannot be predicted with a given temperature.

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOIL MOISTURE	WATER LEVEL
<b>PH</b>	X	MAE=2.685 MASE=1027.81 RMSE=32.059 R2=-0.020	MAE=4.589 MASE=33.367 RMSE=5.77 R2=-0.154	MAE=0.906 MASE=1.836 RMSE=1.35 R2=0.0653	MAE=1.1328 MASE=1.821 RMSE=1.349 R2=0.032	MAE= 100.54. MASE=15723.3 09 RMSE=125.392 R2=-0.05177
<b>SUNLIGHT</b>	MAE=0.9731 MASE=1.421 RMSE=1.192 R2=-0.0967	X	MAE=3.446 MASE=20.575 RMSE=4.535 R2=0.1587	MAE=0.7630 MASE=1.6451 RMSE=1.282 R2=0.2184	MAE=0.945 MASE=1.470 RMSE=1.212 R2=0.0047	MAE=1.0651 MASE= 1.972 RMSE= 1.404 R2=0.00676
<b>HUMIDITY</b>	MAE=0.8707 MASE=1.290 RMSE=1.1359 R2=0.153	MAE=1.91465 MASE=1114.27 RMSE=33.38 R2=0.205	X	MAE=0.725 MASE=1.277 RMSE=1.130 R2=0.290	MAE=1.008 MASE=1.796 RMSE=1.340 R2=0.01474	MAE=108.25 MASE=14820.3 6 RMSE=121.738 R2=0.207
<b>TEMPERATURE</b>	MAE=0.9607 MASE=1.441 RMSE=1.200 R2=0.075	MAE=2.0242 MASE=1750.40 RMSE=41.837 R2=0.2675	MAE=3.8819 MASE=25.495 RMSE=5.049 R2=0.3559	X	MAE=1.130 MASE=2.060 RMSE=1.435 R2=0.00103	MAE=111.24 MASE=16898.5 4RMSE=129.99 R2=0.026065
<b>SOILMOISTURE</b>	MAE=0.9433 MASE=2.2974 RMSE=37.87	MAE=2.3.149 MASE=1434.32 RMSE=1.346	MAE=1.0291 MASE=1.813 RMSE=1.346	MAE=4.599 MASE=33.304 RMSE=5.770	X	MAE=105.00 MASE=16357.0 32 RMSE=127.894 R2= -0.004

	= 1.515 R2=-0.0189	<sup>15</sup> R2=-0.00766	R2=-0.1067	R2=-0.0732		
<b>WATER LEVEL</b>	MAE=0.9163 MASE=1.311 RMSE=1.145 R2=0.0459	MAE=28.312 MASE=2365.95 RMSE=48.641 R2=0.01	MAE=1.055 MASE=1.63225 RMSE=1.2775 RE=0.0771	MAE=4.03624 MASE=25.24 RMSE=5.024 R2=0.16178	MAE=0.9096 MASE=1.342 RMSE=1.158 R2=0.0436	X
	1	1				

Table 20: Linear Regression Between Parameters for Harvesting Phase of Coriander Plant Growth

From Table 7, it can be inferred that humidity and temperature are the most correlated parameters in the harvesting phase of the experiment as MAE=0.723. This means, with a given humidity level, we can predict the temperature required for a good yield. The parameters that cannot be correlated are temperature and water level as the MAE=111.24, this means that the value of Water level cannot be predicted with a given temperature.

Table 21: Linear Regression Between Parameters for Full Phase of Coriander Plant Growth

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOIL MOISTURE	WATER LEVEL
<b>PH</b>	X	MAE=23.313 MASE=1.591.03 RMSE=3.9.88 R2=0.001.8	MAE=3.9601 MASE=27.939 RMSE=5.285 R2=0.00598	MAE=1.210 MASE=3.0650 RMSE=1.750 R2=0.0599	MAE=1.8210 MASE=4.899 RMSE=2.213 R2=0.0378	MAE=137.684 MASE=22732.459 RMSE=150.772 R2=0.2893
<b>SUNLIGHT</b>	MAE=1.0360 MASE=2.128 RMSE=1.459 R2= -0.000246	X	MAE=3.419 MASE=21.26 RMSE=4.61 R2=0.157	MAE=1.147 MASE=2.604 RMSE=1.613 R2=0.185	MAE=1.921 MASE=5.188 RMSE=2.277 R2=-0.0118	MAE=1.8404 MASE=4.6457 RMSE=2.155 R2=-0.0026

<b>HUMIDITY</b>	MAE=0.9411	MAE=20.003	X	MAE=0.929	MAE=1.811	MAE=165.664
	MASE=1.633	MASE=1241.13		MASE=1.478	MASE=4.672	MASE=31591.99
	RMSE=1.278	RMSE=35.22		RMSE=1.216	RMSE=2.161	RMSE=31591.99
	R2=0.0245	R2=0.1857		R2=0.375	R2=0.023	R2=0.02649
<b>TEMPERATURE</b>	MAE=0.9259	MAE=20.468	MAE=3.1046	X	MAE=1.658	MAE=166.6700
	MASE=2.554	MASE=1358.52	MASE=16.046		MASE=4.024	MASE=31745.512
	RMSE=5.1598	RMSE=36.85	RMSE=4.005		RMSE=2.006	RMSE=178.172
	R2=0.0676	R2=0.17	R2=0.47		R2=0.059	R2=0.0422
<b>SOILMOISTURE</b>	MAE=0.936	MAE=22.930	MAE=1.185	MAE=3.6435	X	MAE=125.65
	MASE=1.618	MASE=1473.35	MASE=3.058	MASE=2.441		MASE=22858.07
	RMSE=1.27	RMSE=10.23	RMSE=1.748	RMSE=4.94		RMSE=151.18
	R2=0.113	R2=0.0140	R2=0.0505	R2=0.0159		R2=0.288
<b>WATER LEVEL</b>	MAE=0.850	MAE=23.489	MAE=3.864	MAE=1.185	MAE=1.451	X
	MASE=1.518	MASE=1536.91	MASE=28.33	MASE=2.916	MASE=3.329	
	RMSE=1.23	RMSE=39.20	RMSE=5.322	RMSE=1.707	RMSE=1.824	R2=0.3089
	R2=0.2719	R2=0.0056	R2=0.0316	R2=0.0823		

Table 22: Linear Regression Between Parameters for Full Phase of Coriander Plant Growth

1

From Table 8, it can be inferred that water level and pH are the most correlated parameters in the full phase analysis of the experiment as MAE=0.850. This means, with a given water level, we can predict the pH required for a good yield. The parameters that cannot be correlated are temperature and water level as the MAE=166.67, this means that the value of Water level cannot be predicted with a given temperature.

#### a. Predictive Analysis of parameters using Support Vector Regression

1

PARAMETER VS	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOILMOISTURE	WATER LEVEL

PARAMETER						
PH	X .102 MAE=2. MASE=2 351.64 RMSE=4 8.493 R2=- 0.0852	MAE=22 9432 MASE=2 15.363 RMSE=3 .919 R2= 0.2227	MAE=2. 2803 MASE=1. 598 RMSE=1. 2642 R2=0.044 6	MAE=0.8 812 MASE=1. 423 RMSE=1. 193 R2=- 0.174	MAE=0.8 812 MASE=1. 423 RMSE=1. 193 R2=- 0.174	MAE=10.6116 218.732 RMSE=14.789 R2=-0.0377
SUNLIGHT	MAE=0. 3460 MASE=0.227 RMSE=0.4766 R2=-0.0458	X MAE=2.836 MASE=13.770 RMSE=3.710 R2=0.264	MAE=0.518 MASE=0.871 RMSE=0.933 R2= 0.450	MAE=0.8 686 MASE=1. 362 RMSE=1.167 R2=-0.120	MAE=0.8 89 MASE=1.627 1.275 RMSE=R2=-0.225	MAE=0.9
HUMIDITY	MAE=0. 310 MASE=0.174 RMSE=0.417 R2=0.275	MAE=17 .27 MASE=1259.407 RMSE=35.48 R2=0.275 0.0078	X MAE=0.683 MASE=0.825 RMSE=0. 908 R2= 0.3423	MAE=0.8 33 MASE=1. 378 RMSE=1. 174 R2=- 0.057	MAE=0.8 29 MASE=1. 69.081 RMSE=1. 3.0031 R2=0.030 2	MAE=9.3
TEMPERATURE	MAE=0. 396 MASE=0.317 RMSE=0.563 R2=0.0055	MAE=13 .68 MASE=172.59 RMSE=4.24 R2=0.2142	MAE=2. 742 MASE=11.737 RMSE=3.425 R2=0.466	X MAE=0.8 42 MASE=1. 325 RMSE=1. 151 R2=- 0.1810	MAE=0.8 42 MASE=1. 325 RMSE=1. 1.713 R2=0.250 06	MAE=7.9 547 MASE=1 37.199 RMSE=1 1.713 R2=0.250 06
SOILMOISTURE	MAE=0. 0.348 MASE=0.199 RMSE=0.4461 R2=-0.0110	MAE=20 .962 MASE=2052.051 RMSE=15.299 R2=-0.0695	MAE=3. 7415 MASE=23.297 RMSE=.8267 R2=-0.0293	MAE=0.8 96 MASE=1. 852 RMSE=1. 1.3611 R2=-0.1329	X MAE=0.8 695 MASE=1. 61.8012 RMSE=12.7201 R2=-0.00836	MAE=8.9 695 MASE=1. 61.8012 RMSE=12.7201 R2=-0.00836
WATER LEVEL	MAE=0. 0.359 MASE=0.2667 RMSE=0.5165 R2=-0.0788	MAE=23.2524 MASE=2417.059 RMSE=49.1636 R2=0.0059	MAE=2. 2.9750 MASE=16.440 RMSE=4.05465 R2=0.02438	MAE=1.0 0006 MASE=2. 70294 RMSE=1. 6440 R2=0.1164	MAE=0.7 492 MASE=1. 0809 RMSE=1.0396 R2=-0.1662	X

**Table 23: Support Vector Regression Between Parameters for Initial Phase of Coriander Plant Growth**

1

From Table 9, it can be inferred that humidity and pH are the most correlated parameters in the initial phase of the experiment as MAE=0.310. This means, with a given humidity level, we can predict the pH required for a good yield. The parameters that cannot be correlated are water level and sunlight as the MAE=23.025, this means that the value of Water level cannot be predicted with a given luminous intensity.

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOILMOISTURE	WATER LEVEL
PH	X	MAE=17 0.013 MASE=1014.28 RMSE=3 R2=-0.0743	MAE=3 .8003 MASE=25.36 RMSE=1.84 R2=0.0470	MAE=0.9 95 MASE=2.330 RMSE=1.526 R2=0.1112	MAE=1.63 8 MASE=4.429 RMSE=2.104 R2=0.0109	MAE=120.94. MASE=24176.55 RMSE=155.48 R2=0.026
SUNLIGHT	MAE=1.005 MASE=4.719 RMSE=2.172 R2=-0.0719	X	MAE=3.602 MASE=23.974 RMSE=4.896 R2=0.1506	MAE=0.802 MASE=1.444 RMSE=1.2019 R2=0.430	MAE=1.61 99 MASE=4.0536 RMSE=2.013 R2=0.0220	MAE=13.969 MASE=29287.10 RMSE=171.134 R2=-0.1414
HUMIDITY	MAE=0.822 MASE=1.879 RMSE=1.370 R2=-0.0892	MAE=17 .210 MASE=1090.04 RMSE=3 R2=0.0421	X	MAE=0.7 45 MASE=0.958 RMSE=0.979 R2=0.7400	MAE=1.74 9 MASE=4.602 RMSE=2.1453 R2=0.0295	MAE=13.4.739 MASE=24557.95 RMSE=156.709 R2=-0.0675
TEMPERATURE	MAE=0.839 MASE=1.934 RMSE=1.391 R2=-0.0447	MAE=18 .473 MASE=1451.83 RMSE=3 R2=0.13	MAE=2 .618 MASE=11.78 RMSE=3.43 R2=0.57	X	MAE=1.56 4 MASE=3.69 RMSE=1.922 R2=0.0255	MAE=13.9.68 MASE=26889.48 RMSE=163.980 R2=-0.00359
SOILMOISTURE	MAE=0.886	MAE=18 .183	MAE=4.1329	MAE=1.1 566	X	MAE=13.6.775

	MASE = 2.831	MASE= 1149.82	MASE= 30.32	MASE=3.		MASE=2
	RMSE = 10.682	RMSE= 33.909	RMSE= 5.5065	RMSE= 1.84	R2=-	RMSE=1
	R2= -0.037	R2= 0.0549	R2= 0.0070	R2= 0.0083		57.42
						R2= 0.069
<b>WATER LEVEL</b>	MAE= 0.5868	MAE=17 .654	MAE=3 .581	MAE=1.1 76	MAE=1.28 47	X
	MASE = 1.542	MASE= 1008.07	MASE= 24.307	MASE=3. 361	MASE=2. 611	
	RMSE = 15.241	RMSE=3 1.750	RMSE= 4.930	RMSE=1. 83	RMSE=1.6 16	
	R2= 0.3	R2= 0.11	R2= 0.0380	R2= 0.368		
	1 133	0.04008	96			

Table 24:Support Vector Regression Between Parameters for Growing Phase of Coriander Plant Growth

From Table 10, it can be inferred that water level and pH are the most corelated parameters in the growth phase of the experiment as MAE=0.586. This means, with a given water level, we can predict the pH required for a good yield. The parameters that cannot be corelated are temperature and water level as the MAE=139.68, this means that the value of Water level cannot be predicted with a given temperature.

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOILMOISTURE	WATER LEVEL
<b>PH</b>	X	MAE=14 .519	MAE=3 .750	MAE=0.8 486	MAE=1.2 121	MAE= 109.77
		MASE=1 121.40	MASE= 23.179	MASE=1. 7209	MASE=2. 518	MASE= 21901.17
		RMSE=3 3.487	RMSE= 4.814	RMSE=1. 311	RMSE=1. 586	RMSE= 147.99
		R2= -0.055	R2= 0.2572	R2= 0.053	R2= 0.043	R2= 0.1792
<b>SUNLIGHT</b>	MAE=0 .975	X	MAE= 3.642	MAE= 0.5587	MAE=1.0 33	MAE=11 0.02
	MASE= 1.782		MASE= 23.84	MASE= 0.9602	MASE=1. 731	MASE= 1459.37
	RMSE= 1.334		RMSE= 4.883	RMSE= 0.979	RMSE= 1.315	RMSE= 146.49
	R2= 0.0502		R2= 0.2922	R2= 0.537	R2= -0.109	R2= 0.334
<b>HUMIDITY</b>	MAE=0 .733	MAE=15 .693	X	MAE=0.6 907	MAE=1.1 97	MAE=11 2.208
	MASE=	MASE=		MASE=1.	MASE=2.	

	1.0997 RMSE=	1416.608 RMSE=3		549 RMSE=1.	227 RMSE=1.	MASE=2 1545.41
	1.0487 R2=0.1	7.637 R2=0.100		244 R2=0.144	492 R2=- 0.087	RMSE=1 46.783
	170	4				R2=- 0.1230
<b>TEMPERATURE</b>	MAE=0 .848	MAE=7. 830	MAE=2 .654	X	MAE=0.9 160	MAE=10 3.405
	MASE=	MASE=2	MASE=		MASE=1. 190	MASE=1 8617.395
	1.307	09.74	13.02		RMSE=1. 090 R2=-	RMSE=1 36.445
	RMSE=	RMSE=1	RMSE=		0.012	R2= 0.0513
	1.143	5482	3.609			
	R2=-	R2=0.491	R2=0.3			
	0.0404		560			
<b>SOILMOISTURE</b>	MAE=0 .908	MAE=14 .502	MAE=4 .892	MAE=1.0 27	X	MAE=11 7.428
	MASE=	MASE=1	MASE=	MASE=2. 190		MASE=2 2258.28
	1.576	074.906	38.307	RMSE=1. 480 R2=-		RMSE=1 49.192
	RMSE=	RMSE=3	RMSE=	0.0648		R2= 0.1749
	1.255	2.785	6.189			
	R2=0.0	R2=-	R2=			
	711	0.0437	0.0917			
<b>WATER LEVEL</b>	MAE=0 .868	MAE=13 .670	MAE=	MAE=0.7 85	MAE=0.9 191	X
	MASE=	MASE=5	MASE=	MASE=1. 084	MASE=1. 329	
	2.479	25.301	25.571	RMSE=1. 041 R2=-	RMSE=	
	RMSE=	RMSE=2	RMSE=	1.152		
	1.574	2.919	5.056	0.011	R2=0.298	
	R2=0.0	R2= -	R2=0.3			
	69	0.1050	047			

Table 25:Support Vector Regression Between Parameters for Harvesting Phase of Coriander Plant Growth

1

From Table 11, it can be inferred that sunlight and temperature are the most corelated parameters in the harvesting phase of the experiment as MAE=0.558. This means, with a given luminous intensity, we can predict the temperature required for a good yield. The parameters that cannot be corelated are soil moisture and water level as the MAE=117.428, this means that the value of Water level cannot be predicted with a soil moisture.

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOILMOISTURE	WATER LEVEL
<b>PH</b>	X	MAE=18 .38	MAE=3. 538	MAE=1.0 02	MAE=1.5 06	MAE=127.77.

		MASE=1 347.984 RMSE=3 571 R2=- 0.0432	MASE=2. 22.984 RMSE=1. 4.7942 R2=0.03 80	MASE=2. 368 RMSE=1. 539 R2=0.189	MASE=3. 971 RMSE=1. 992 R2=0.173 3	MASE=22839.3 RMSE=151.12 R2=0.288
<b>SUNLIGHT</b>	MAE=0 .9430 MASE=2.927 RMSE=15.11 R2=- 0.00975	X	MAE=3.621 MASE=23.651 RMSE=4.8632 R2=0.21 463	MAE=1.111 MASE=539 RMSE=593 R2= 0.3130	MAE=1.9 406 MASE=305 RMSE=2.3033 R2=- 0.0322	MAE=16 2.013 MASE=31499.0 RMSE=77.479 R2=0.021 8
<b>HUMIDITY</b>	MAE=0 .9039 MASE=1.6860 RMSE=1.298 R2=- 0.0062	MAE=18 .2066 MASE=1 258.105 RMSE=5.469 R2=0.0738	X	MAE=0.974 MASE=1.814 RMSE=1.3470 R2=0.486	MAE=1.7 15 MASE=4.422 RMSE=2.102 R2= 0.0019	MAE=16 1.61 MASE=30181.06 RMSE=73.72 R2=0.057
<b>TEMPERATURE</b>	MAE=0 .898 MASE=2.785 RMSE=5.668 R2=0.0 656	MAE=18 .518 MASE=1 583.68 RMSE=3 9.109 R2=0.115	MAE=2. 86 MASE=13.61 RMSE=3.689 R2=0.46 70	X	MAE=1.6 09 MASE=4.139 RMSE=2.034 R2=0.099	MAE=13 6.567 MASE=26169.03 RMSE=161.76 R2=0.148
<b>SOILMOISTURE</b>	MAE=0 .8068 MASE=1.744 RMSE=1.320 R2=0.0 942	MAE=20 .280 MASE=1 555.81 RMSE=39.443 R2=- 0.055	MAE=3.8521 MASE=27.5794 RMSE=5.251 R2=0.0213	MAE=1.1 79 MASE=3. 128 RMSE=1.768 R2=0.043 6	X	MAE=11 0.411 MASE=2 1951.64 RMSE=1 48.160 R2=0.312
<b>WATER LEVEL</b>	MAE=0.682 MASE=1.331 RMSE=1.153 R2=0.3 188	MAE=19.253 MASE=1462.55 RMSE=38.243 R2=- 0.0474	MAE=3.608 MASE=25.069 RMSE=5.0069 R2=- 0.00369	MAE=1.0 911 MASE=2. 591 RMSE=1. 609 R2=0.135 9	MAE=1.2 37 MASE=2. 696 RMSE=1.642 R2= 0.4985	X

Table 26: Support Vector Regression Between Parameters for Full Phase of Coriander Plant Growth

1

From Table 12, it can be inferred that water level and pH are the most correlated parameters in the full phase analysis of the experiment as MAE=0.682. This means,

with a given water level, we can predict the pH required for a good yield. The parameters that cannot be correlated are sunlight and water level as the MAE=162.013, this means that the value of Water level cannot be predicted with a given luminous intensity.

#### Predictive Analysis of parameters using Decision Tree Regression

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOILMOISTURE	WATER LEVEL
PH	X	MAE=25.117 MASE=1.570.68 RMSE=3.9.631 R2=-0.0493	MAE=3.4989 MASE=21.020 RMSE=4.584 R2=0.26 2	MAE=1.0 MASE=2.704 RMSE=1.644 R2=-0.415	MAE=0.95 MASE=1.3727 RMSE=1.171 R2=-0.1289	MAE=1.1.330 MASE=266.11 RMSE=16.312 R2=-0.303
SUNLIGHT	MAE=0.4213 MASE=0.329 RMSE=0.573 R2=-0.227	X MAE=3.117 MASE=16.69 RMSE=4.085 R2=0.216	MAE=0.637 MASE=1.028 RMSE=1.014 R2=0.5450	MAE=1.12 MASE=2.266 RMSE=1.505 R2=-0.0655	MAE=0.996 MASE=1.558 RMSE=1.248 R2=-0.3035	
HUMIDITY	MAE=0.408 MASE=0.292 RMSE=0.541 R2=-0.365	MAE=36.44 MASE=4653.88 RMSE=68.219 R2=0.3042	X MAE=0.9103 MASE=1.477 RMSE=1.215 R2=0.174	MAE=1.03 MASE=2.304 RMSE=1.517 R2=-0.2165	MAE=1.1.833 MASE=332.31 RMSE=18.22 R2=-1.0522	
TEMPERATURE	MAE=0.389 MASE=0.280 RMSE=0.529 R2=-0.0033	MAE=23.802 MASE=2150.406 RMSE=46.37 R2=0.322	MAE=2.903 MASE=11.880 RMSE=3.446 R2=0.410	X MAE=1.13 MASE=1.858 RMSE=1.363 R2=-0.433	MAE=8.271 MASE=122.69 RMSE=11.07 R2=0.303	
SOILMOISTURE	MAE=0.406 MASE=	MAE=28.44 MASE=	MAE=3.018 MASE=	MAE=0.7735 MASE=1.	X MAE=1.1.341 MASE=	

	0.294 RMSE= 10.42 R2= - 0.0160	2407.91 RMSE= 9.070 R2= - 0.0055	16.75 RMSE= 4.093 R2= - 0.020	104 RMSE= 1.050 R2= - 0.0059		217.46 RMSE= 14.74 R2= - 0.205
<b>WATER LEVEL</b>	MAE= 0.334 MASE= 0.218 RMSE= 0.4672 R2= - 0.129	MAE=21.03 MASE=1.526.93 RMSE= 5.075 R2=0.240	MAE= 3.323 MASE= 18.834 RMSE= 4.339 R2=0.05	MAE= 19 MASE= 70294 RMSE= 5006 R2=0.0072	MAE= 35 MASE= 879 RMSE= 707 R2= - 0.5531	X

Table 27: Decision Tree Regression Between Parameters for Initial Phase of Coriander Plant Growth

From Table 13, it can be inferred that water level and pH are the most correlated parameters in the initial phase of the experiment as MAE=0.334. This means, with a given water level, we can predict the pH required for a good yield. The parameters that cannot be correlated are water level and humidity as the MAE=11.833, this means that the value of Water level cannot be predicted with a given humidity.

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOIL MOISTURE	WATER LEVEL
<b>PH</b>	X	MAE=23.48 7 MASE=155 6.330 RMSE=39.4 50 R2= - 0.133	MAE=4.4440 MASE= 33.518 RMSE= 5.789 R2= - 0.066	MAE=1.067 MASE= 2.294 RMSE= 1.514 R2= - 0.055	MAE=1.662 MASE= 4.845 RMSE= 2.201 R2=0.017	MAE= 86.23 MASE= 4214.92 RMSE= 119.22 R2=0.422
<b>SUNLIGHT</b>	MAE=1.210 MASE= 5.287 RMSE= 2.299 R2= - 0.220	X	MAE=3.764 MASE= 24.775 RMSE= 4.977 R2= - 0.102	MAE=0.902 MASE= 2.036 RMSE= 2.036 R2= - 0.3970	MAE=1.852 MASE= 5.100 RMSE= 2.258 R2= - 0.126	MAE= 14.063 MASE= 8070.58 RMSE= 67.54 R2= - 0.131
<b>HUMIDITY</b>	MAE=1.085 MASE= 2.475	MAE=19.74 MASE= 1059.71 RMSE=	X	MAE=0.9107 MASE= 1.569	MAE=1.816 MASE= 5.153	MAE= 14.2.944 MASE= 3.2162.22

	RMSE=1.57 R2=-0.264	32.55 R2= -0.2786		RMSE=1.252 R2=0.438	RMSE=2.270 R2= -0.4041	RMSE=1.79.338 R2=-0.161
<b>TEMPERATURE</b>	MAE=0.947 MASE=1.723 RMSE=1.312 R2=-0.142	MAE=15.279 MASE=791.16 RMSE=28.127 R2=0.2953	MAE=2.512 MASE=11.047 RMSE=3.323 R2=0.475	X	MAE=1.775 MASE=4.988 RMSE=2.233 R2=-0.105	MAE=13.4.80 MASE=2.5756.83 RMSE=1.60.48 R2=-0.010
<b>SOILMOISTURE</b>	MAE=1.0263 MASE=1319.71 RMSE=2 R2=-0.0284 R2= --0.0082	MAE=21.63 MASE=285 RMSE=36.3 R2= -0.0023	MAE=3.063 MASE=19.059 RMSE=4.365 R2= -0.0023	MAE=1.063 MASE=2.231 RMSE=1.493 R2=0.0132	X	MAE=12.1.68 MASE=2.2438.58 RMSE=1.49.79 R2=0.1508
<b>WATER LEVEL</b>	MAE=0.698 MASE=1.371 RMSE=1.171 R2=0.0499	MAE=22.549 MASE=1676. RMSE=62 R2=0.040.94	MAE=3.063 MASE=20.044 RMSE=4.477 R2=0.2023	MAE=1.067 MASE=3.0071 RMSE=1.734 R2=0.09765	MAE=1.528 MASE=3.8 RMSE=1.95 R2=0.0723	X

Table 28: Decision Tree Regression Between Parameters for Growing Phase of Coriander Plant Growth

From Table 14, it can be inferred that water level and pH are the most correlated parameters in the growth phase of the experiment as MAE=0.698. This means, with a given water level, we can predict the pH required for a good yield. The parameters that cannot be correlated are water level and humidity as the MAE=142.944, this means that the value of Water level cannot be predicted with a given humidity.

PARAMETER VS PARAMETER		PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOILMOISTURE	WATER LEVEL
PH	X	MAE=22.732 MASE=2.045.76 RMSE=4	MAE=4.569 MASE=2.45.141 RMSE=	MAE=0.882 MASE=2.502 RMSE=1.	MAE=1.471 MASE=4.134 RMSE=2.	MAE=83.55 MASE=18340.29 RMSE=1	

		5.230	6.718	581 R2=-	0333 R2=-	35.42
		R2=-	R2=-	0.225	0.8793	R2=-
		0.0708	0.4399			0.069
SUNLIG	MAE=1	X	MAE=3.	MAE=	MAE=1.5	MAE=12
HT	.146		395	0.6377	740	9.51
	MASE		MASE=	MASE=	MASE=3.	MASE=2
	=2.743		21.554	1.307	8384	5884.24
	RMSE=		RMSE=	RMSE=1.	RMSE=1.	RMSE=1
	1.656		4.642	143 R2=	959 R2=-	60.885
	R2= -		R2=0.41	0.498	0.453	R2=0.436
	0.0261		4			7
HUMIDIT	MAE=1	MAE=15.	X	MAE=0.8	MAE=1.5	MAE=87.
Y	.062	92		41	22	022
	MASE	MASE=5		MASE=2.	MASE=3.	MASE=1
	=2.186	05.16		206	722	5484.1
	RMSE=	RMSE=2		RMSE=1.	RMSE=1.	RMSE=1
	1.478	147		485 R2= -	929 R2= -	24.43
	R2= -	R2=0.59		0.262	0.926	R2=0.135
	0.724					
TEMPER	MAE=0	MAE=7.1	MAE=3.	X	MAE=1.1	MAE=93.
ATURE	.723	83	359		23	27
	MASE	MASE=1	MASE=		MASE=1.	MASE=1
	=0.985	98.86	23.251		954	5132.8
	RMSE=	RMSE=1	RMSE=		RMSE=1.	RMSE=1
	5.992	4.102	4.822		397 R2= -	23.01
	R2=0.4	R2=0.787	R2=0.34		0.4325	R2= -
	802		2			0.0493
SOILMOI	MAE=1	MAE=28.	MAE=4.	MAE=1.0	X	MAE=11
STURE	.046	62	297	60		7.64
	MASE	MASE=2	MASE=	MASE=1.		MASE=2
	=1.781	623.48	29.772	905		2102.11
	RMSE=	RMSE=5	RMSE=	RMSE=1.		RMSE=1
	103	1.220	5.456	380 R2= -		48.66
	R2= -	R2= -	R2= -	0.3879		R2= -
	0.018	0.0750	0.190			0.1676
WATER	MAE=	MAE=22.	MAE=4.	MAE=1.0	MAE=1.1	X
LEVEL	0.7400	803	103	0740	97	
	MASE	MASE=1	MASE=	MASE=2.	MASE=2.	
	=1.444	843.464	32.056	8656	6819	
	RMSE=	RMSE=4	RMSE=	RMSE=1.	RMS 5=1.	
	1.201	2.935	5.661	6928	6376 R2=	
	R2=0.1	R2= -	R2=0.04	R2= -	-0.33059	
	158	0.616	54	0.9196		

Table 29: Decision Tree Regression Between Parameters for Harvesting Phase of Coriander Plant Growth

From Table 15, it can be inferred that sunlight and temperature are the most correlated parameters in the harvesting phase of the experiment as MAE=0.6377. This means, with a given temperature, we can predict the luminous intensity required for a good yield. The parameters that cannot be correlated are water level and sunlight as the

MAE=129.51, this means that the value of Water level cannot be predicted with a given sunlight.

PARAMETER VS PARAMETER	PH	SUNLIGHT	HUMIDITY	TEMPERATURE	SOIL MOISTURE	WATER LEVEL
PH	X	MAE=23.667 MASE=1.574.28 RMSE=3.9.67 R2=-0.0871	MAE=3.77 MASE=26.197 RMSE=5.118 R2=0.0070	MAE=1.1 MASE=3.1117 RMSE=1.764 R2=0.027	MAE=1.3 MASE=3.4744 RMSE=1.863 R2=0.296	MAE=70.152 MASE=1.3362.83 RMSE=1.15.597 R2=0.589
SUNLIGHT	MAE=1.0190 MASE=2.469 RMSE=1.571 R2=-0.1476	X	MAE=3.674 MASE=22.97 RMSE=4.7930 R2=0.17	MAE=1.0 MASE=2.232 RMSE=1.494 R2=0.243	MAE=1.8 MASE=5.101 RMSE=2.258 R2=-0.155	MAE=16.311 MASE=3.4396.27 RMSE=1.85.46 R2=-0.0659
HUMIDITY	MAE=1.032 MASE=1.956 RMSE=1.398 R2=-0.219	MAE=22.217 MASE=1.540.602 RMSE=3.9.250 R2=0.103	X	MAE=0.9 MASE=1.620 RMSE=1.272 R2=0.337	MAE=1.9 MASE=5.624 RMSE=2.371 R2=-0.1596	MAE=16.2.59 MASE=3.6533.3 RMSE=1.91.13 R2=-0.152
TEMPERATURE	MAE=0.911 MASE=1.703 RMSE=1.305 R2=0.11 710	MAE=17.664 MASE=1.005.81 RMSE=3.1.714 R2=0.044 0	MAE=3.0675 MASE=1.16.238 RMSE=1.4.0296 R2=0.30	X	MAE=1.6 MASE=4.224 RMSE=2.055 R2=0.058	MAE=14.7.269 MASE=2.9019.5 RMSE=1.70.351 R2=0.129 9
SOIL MOISTURE	MAE=0.9751 MASE=2.7447 RMSE=1.656 R2=0.08 73	MAE=20.854 MASE=1.216.04 RMSE=3.4.87 R2=0.005 87	MAE=3.995 MASE=2.28.318 RMSE=1.5.321 R2= -0.0553	MAE=1.0 MASE=2.619 RMSE=1.618 R2=0.109	X	MAE=11.2.74 MASE=2.0885.92 RMSE=1.44.519 R2=0.3583
WATER LEVEL	MAE=0.706 MASE=1	MAE=23.019 MASE=1	MAE=3.665 MASE=	MAE=1.1 MASE=3.	MAE=1.2 MASE=2.	X

	1.328	913.38	25.972	302	836	
RMSE=	RMSE=4	RMSE=	RMSE=1.	RMSE=1.	RMSE=1.	
5152	3.74	5.096	8172	684		
R2=0.21	R2=0.055	R2=0.07	R2=-	R2=-	R2=0.425	
10	3	35	0.2404	8		

Table 30: Decision Tree Regression Between Parameters for Full Phase of Coriander Plant Growth

1

From Table 16, it can be inferred that water level and pH are the most correlated parameters in the full phase analysis of the experiment as MAE=0.706. This means, with a given water level, we can predict the pH required for a good yield. The parameters that cannot be correlated are water level and sunlight as the MAE=163.11, this means that the value of Water level cannot be predicted with a given luminous intensity.

#### **5.4) Yield Generated for crops**

2

Accurate, early estimation of grain yield is an important skill. Farmers require accurate yield estimates for a number of reasons:

- crop insurance purposes
- delivery estimates
- planning harvest and storage requirements
- cash-flow budgeting

Extensive personal experience is essential for estimating yield at early stages of growth. As crops near maturity, it becomes easier to estimate yield with greater accuracy.

There are many methods available for farmers and others to estimate yield of various crops. Some are straightforward whereas others are more complicated. The method presented here is one that can be undertaken relatively quickly and easily.

Steps are as follows:

1. Select an area that is representative of the paddock. Using some type of measuring rod or tape, measure out an area of  $1\text{m}^2$  and count the number of heads or pods.
2. Do this 5 times to get an average of the crop (A)
3. Count the number of grains in at least 20 heads or pods and average (B)

4. Using Table 1 determine the grain weight for the crop concerned (C)
5. Yield in t/ha =  $(A \times B \times C) / 10,000$

For example, to calculate a wheat yield where:

- Average number of heads/pods per m<sup>2</sup> is 220 (A)
- Average number of grains per head/pod is 24 (B)
- Weight of 100 grains of wheat is 3.4g (per Table 1) (C)

$$\text{Yield in t/ha} = (220 \times 24 \times 3.4) / 10,000 = 1.79$$

Accuracy of yield estimates depends upon an adequate number of counts being taken so as to get a representative average of the paddock. The yield estimate determined will only be a guide and assumptions made from the estimates contain a degree of uncertainty.

This type of yield estimation is one of the easiest and quickest to complete and should be able to be used in a number of situations on a grain growing property. Grain losses both before and during harvest can be significant and an allowance for 5 to 10% loss should be included in your final calculations.

Container Number	No of seeds (a)	No of seeds grown (b)	No of seeds without growth(c=a-b)	Yield (c*100/a)
1	16	9	7	56.25%
2	19	12	7	63.15789474%
3	13	11	2	84.61538462%
4	12	7	5	58.33333333%
5(large)	32	25	7	78.125%

Table 31: Yield generated through our hydroponic system

#### **5.4) Fully Automated Hydroponic system**

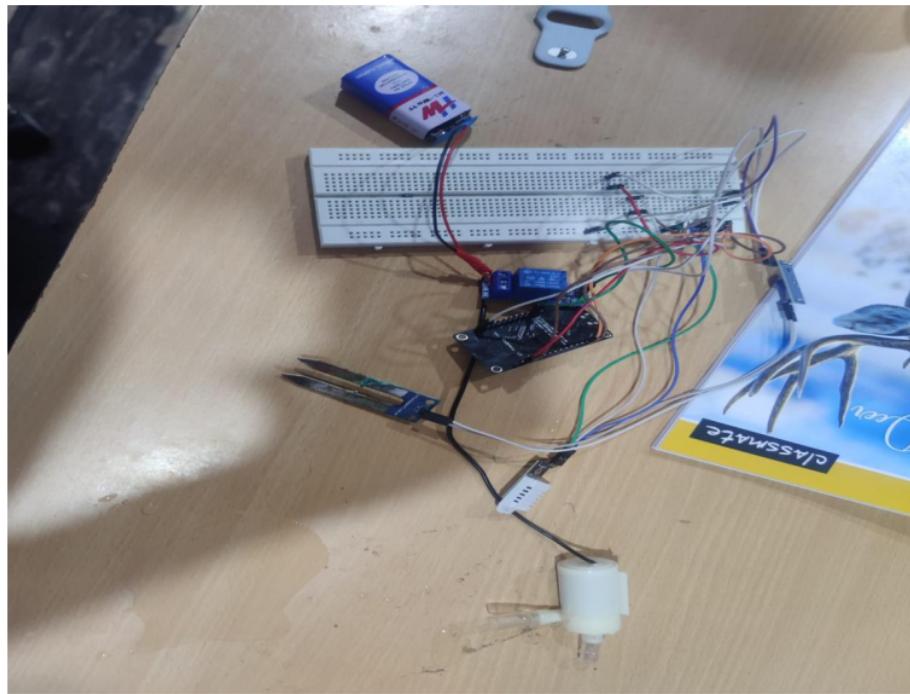


Figure 7:Image of automated hydroponic system

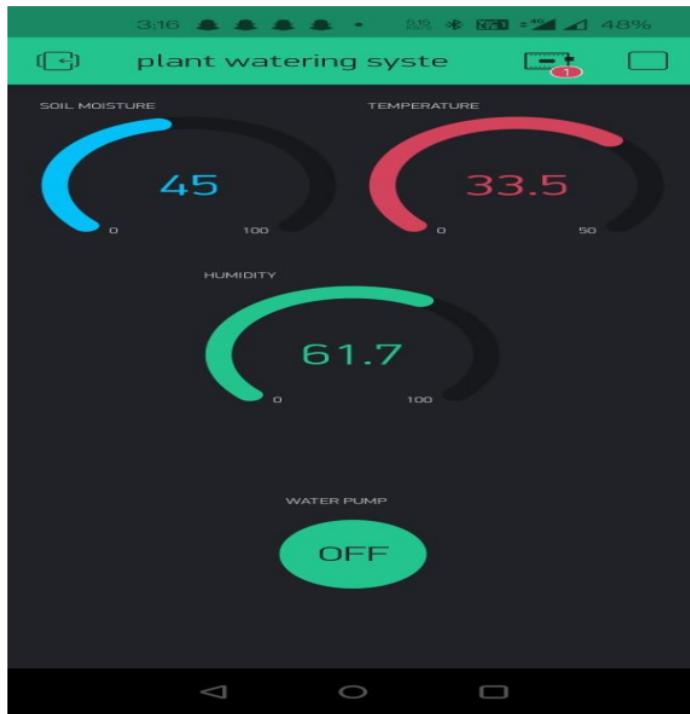


Figure 8: Graphical user interface for hydroponic system

## **6) Conclusion**

### **6.1) Limitations**

In conclusion, our whole work can be split into two main part. The first one being the growth of plants and creation of data set, in this we have grown the crops and taken the data with the help of sensors. In this aspect, there is minimal automation. The dataset is then created by taking the data and cleaning it to make sure that the anomalies are removed. With the help of this data set, we then move onto the second phase of the work. The second phase of this work is processing of the data set created and corelating the data to establish the best scenario for plant growth and good yield. With the help of Linear Regression, Support vector regression and Decision Tree Regression, we have established the parameters which are best corelated.

### **6.2) Scope for future work**

For the work that can be done to further the progress done by us is to fully automate the system. With the correlation achieved by us, the parameters can be used to know the

ambient conditions required when a certain parameter is fixed and cannot be altered in any way possible especially in the city environment in countries like India.

### Annexure – I (Sample codes)

#### Code for Hydroponic system

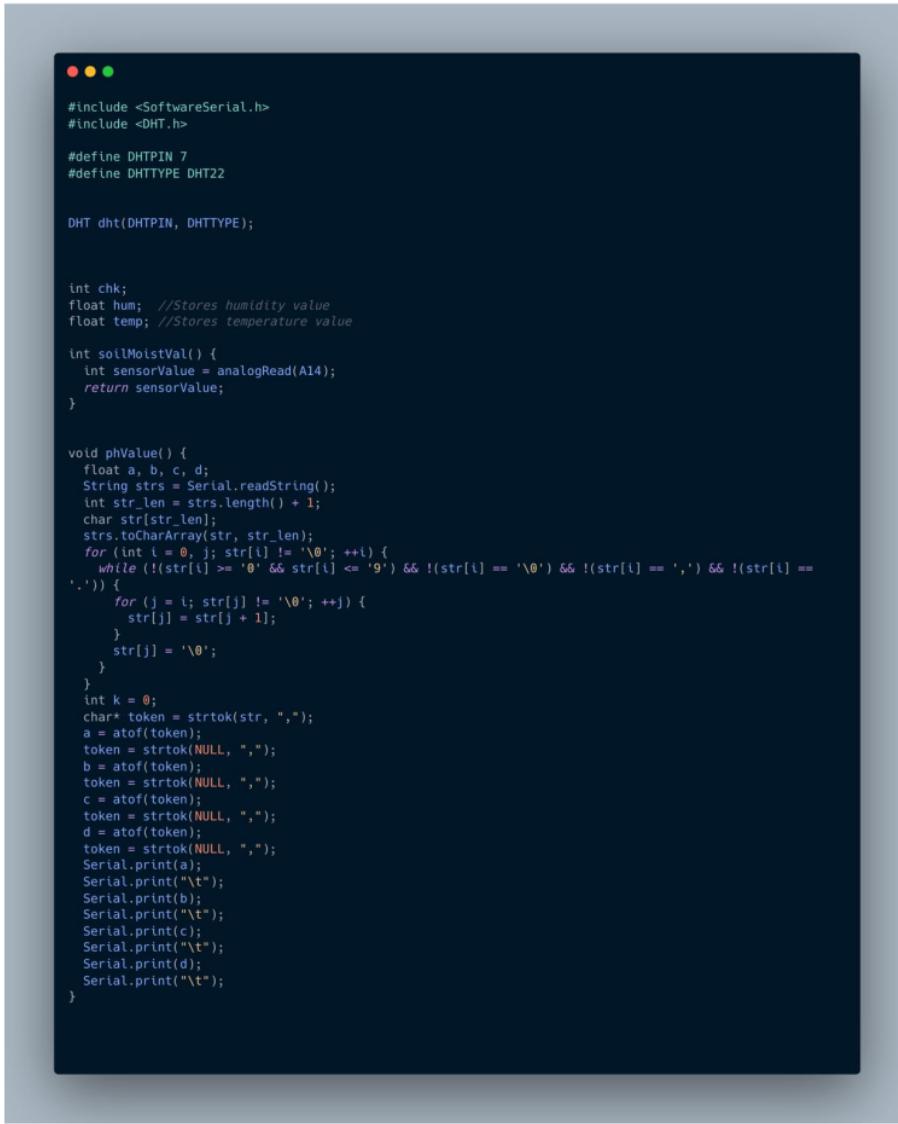


Figure 9: Hydroponic system code part-I

```
● ● ●


int waterLevel() {
    const int sensorMin = 0;
    const int sensorMax = 1024;
    int sensorReading = analogRead(A0);
    int range = map(sensorReading, sensorMin, sensorMax, 0, 3);
    switch (range) {
        case 0: {
            Serial.print("Water level full!\t");
            break;
        }
        case 1: {
            Serial.print("Water level warning!\t");
            break;
        }
        case 2: {
            Serial.print("Not enough water!\t");
            break;
        }
    }
    return sensorReading;
}

void setup() {
    Serial.begin(9600);
    dht.begin();
}

void loop() {
    float* reqVal;
    hum = dht.readHumidity();
    temp = dht.readTemperature();
    int valSensorSoil = soilMoistVal();
    int valSensorWaterLevel = waterLevel();
    phValue();
    Serial.print(hum); //B
    Serial.print("\t");
    Serial.print(temp); //C
    Serial.print("\t");
    Serial.print(valSensorSoil); //D
    Serial.print("\t");
    Serial.print(valSensorWaterLevel); //E
    Serial.print("\t");
    Serial.println();
    //delay(2000); // 2 seconds
    delay(600000); //10 minutes
}
```

Figure 10:Hydroponic system code part 2

## Code for Linear Variation system

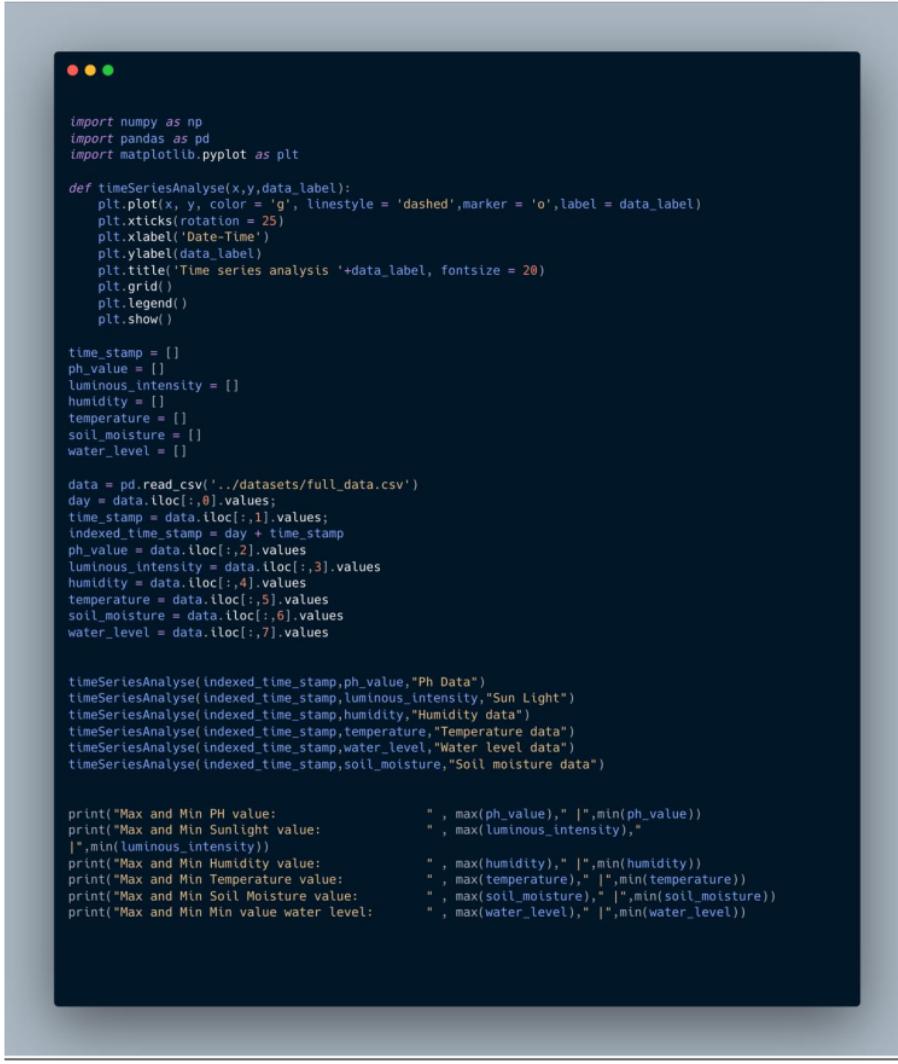

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt

def timeSeriesAnalyse(x,y,data_label):
    plt.plot(x, y, color = 'g', linestyle = 'dashed',marker = 'o',label = data_label)
    plt.xticks(rotation = 25)
    plt.xlabel('Date-Time')
    plt.ylabel(data_label)
    plt.title('Time series analysis '+data_label, fontsize = 20)
    plt.grid()
    plt.legend()
    plt.show()

time_stamp = []
ph_value = []
luminous_intensity = []
humidity = []
temperature = []
soil_moisture = []
water_level = []

data = pd.read_csv('../datasets/full_data.csv')
day = data.iloc[:,0].values;
time_stamp = data.iloc[:,1].values
indexed_time_stamp = day + time_stamp
ph_value = data.iloc[:,2].values
luminous_intensity = data.iloc[:,3].values
humidity = data.iloc[:,4].values
temperature = data.iloc[:,5].values
soil_moisture = data.iloc[:,6].values
water_level = data.iloc[:,7].values

timeSeriesAnalyse(indexed_time_stamp,ph_value,"Ph Data")
timeSeriesAnalyse(indexed_time_stamp,luminous_intensity,"Sun Light")
timeSeriesAnalyse(indexed_time_stamp,humidity,"Humidity data")
timeSeriesAnalyse(indexed_time_stamp,temperature,"Temperature data")
timeSeriesAnalyse(indexed_time_stamp,water_level,"Water level data")
timeSeriesAnalyse(indexed_time_stamp,soil_moisture,"Soil moisture data")

print("Max and Min PH value: " , max(ph_value)," | ",min(ph_value))
print("Max and Min Sunlight value: " , max(luminous_intensity)," | ",min(luminous_intensity))
print("Max and Min Humidity value: " , max(humidity)," | ",min(humidity))
print("Max and Min Temperature value: " , max(temperature)," | ",min(temperature))
print("Max and Min Soil Moisture value: " , max(soil_moisture)," | ",min(soil_moisture))
print("Max and Min Water level: " , max(water_level)," | ",min(water_level))
```

Figure 11:Code for data analysis

## Code for machine learning analysis

### Linear regression

```
from string import Template
import numpy as np
import matplotlib.pyplot as plt
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LinearRegression
from sklearn.metrics import mean_absolute_error, mean_squared_error, r2_score

def splittingDataset(X, y):
    X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
    return X_train, X_test, y_train, y_test

def linearRegression(X, y):
    X_train, X_test, y_train, y_test = splittingDataset(X, y)
    regression = LinearRegression()
    regression.fit(X_train, y_train)
    y_pred = regression.predict(X_test)
    rev(y_test, y_pred)
    return X_train, X_test, y_train, y_test, regression, y_pred

def visualisingResults(X, y, regressor, label_x, label_y, typ):
    plt.scatter(X, y, color='red')
    plt.plot(X, regressor.predict(X), color='green')
    title = Template('${labelx} vs ${labely} (${typ} set)')
    plt.title(title.substitute(labelx=label_x, labely=label_y, typ=typ))
    plt.xlabel(label_x)
    plt.ylabel(label_y)
    plt.show()

def rev(y_test, y_pred):
    print("Mean Absolute Error:", mean_absolute_error(y_test, y_pred))
    print("Root Mean Squared Error:", mean_squared_error(y_test, y_pred))
    print("Root Mean Squared Log Error:", np.sqrt(
        mean_squared_error(y_test, y_pred)))
    print("R Squared:", r2_score(y_test, y_pred))
```

Figure 12:Code for linear regression analysis

### SVR regression

```
from string import Template
import numpy as np
import matplotlib.pyplot as plt
from sklearn.model_selection import train_test_split
from sklearn.svm import SVR
from sklearn.metrics import mean_absolute_error, mean_squared_error, r2_score


def splittingDataset(X, y):
    X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
    return X_train, X_test, y_train, y_test

def svrRegression(X, y):
    X_train, X_test, y_train, y_test = splittingDataset(X, y)
    regressor = SVR(kernel='rbf')
    regressor.fit(X_train, y_train)
    y_pred = regressor.predict(X_test)
    rev(y_test, y_pred)
    return X_train, X_test, y_train, y_test, regressor, y_pred

def rev(y_test, y_pred):
    print("Mean Absolute Error:", mean_absolute_error(y_test, y_pred))
    print("Root Mean Squared Error:", mean_squared_error(y_test, y_pred))
    print("Root Mean Squared Log Error:", np.sqrt(
        mean_squared_error(y_test, y_pred)))
    print("R Squared:", r2_score(y_test, y_pred))

def visualisingResults(X, y, regressor, label_x, label_y, typ):
    plt.scatter(X, y, color='red')
    plt.plot(X, regressor.predict(X), color='green')
    title = Template('${labelx} vs ${labely} (${typ} set)')
    plt.title(title.substitute(labelx=label_x, labely=label_y, typ=typ))
    plt.xlabel(label_x)
    plt.ylabel(label_y)
    plt.show()
```

### Decision tree regression

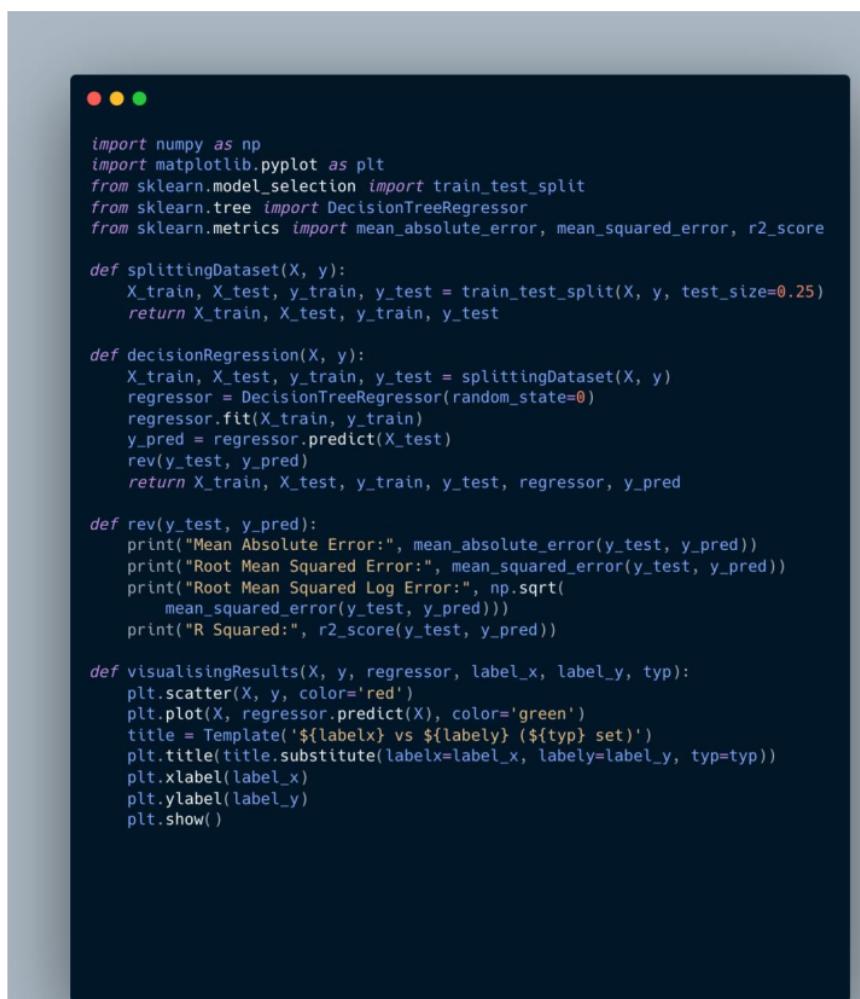

```
import numpy as np
import matplotlib.pyplot as plt
from sklearn.model_selection import train_test_split
from sklearn.tree import DecisionTreeRegressor
from sklearn.metrics import mean_absolute_error, mean_squared_error, r2_score

def splittingDataset(X, y):
    X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.25)
    return X_train, X_test, y_train, y_test

def decisionRegression(X, y):
    X_train, X_test, y_train, y_test = splittingDataset(X, y)
    regressor = DecisionTreeRegressor(random_state=0)
    regressor.fit(X_train, y_train)
    y_pred = regressor.predict(X_test)
    rev(y_test, y_pred)
    return X_train, X_test, y_train, regressor, y_pred

def rev(y_test, y_pred):
    print("Mean Absolute Error:", mean_absolute_error(y_test, y_pred))
    print("Root Mean Squared Error:", mean_squared_error(y_test, y_pred))
    print("Root Mean Squared Log Error:", np.sqrt(
        mean_squared_error(y_test, y_pred)))
    print("R Squared:", r2_score(y_test, y_pred))

def visualisingResults(X, y, regressor, label_x, label_y, typ):
    plt.scatter(X, y, color='red')
    plt.plot(X, regressor.predict(X), color='green')
    title = Template('${labelx} vs ${labely} (${typ} set)')
    plt.title(title.substitute(labelx=label_x, labely=label_y, typ=typ))
    plt.xlabel(label_x)
    plt.ylabel(label_y)
    plt.show()
```

Figure 13:Code for decision tree regression

## **References**

Weblinks:

- 1.<https://www.thebetterindia.com/265317/uttar-pradesh-hydroponics-farm-home-grows-vegetables-fruits-earns-lakhs/>
- 2.<https://www.thebetterindia.com/265639/sandeep-kannan-vyavasai-bhoomi-tirupati-hydroponics-startup-farmer-success-story/>
- 3.<https://www.expresspharma.in/hydroponics-market-expected-to-grow-at-a-cagr-of-about-26-per-cent-by-2023/>
- 4.<https://krishijagran.com/agripedia/why-hydroponic-farms-are-trending-in-india/>

**Journal:**

1. A. Nichani, S. Saha, T. Upadhyay, A. Ramya and M. Tolia, "Data Acquisition and Actuation for Aquaponics using IoT," 2018 3rd IEEE International Conference on Recent Trends in Electronics, Information & Communication Technology (RTEICT), 2018, pp. 46-51, doi: 10.1109/RTEICT42901.2018.9012260.
2. H. K. Srinidhi, H. S. Shreenidhi and G. S. Vishnu, "Smart Hydroponics system integrating with IoT and Machine learning algorithm," 2020 International Conference on Recent Trends on Electronics, Information, Communication & Technology (RTEICT), 2020, pp. 261-264, doi: 10.1109/RTEICT49044.2020.9315549.
3. P. Srivani, Y. Devi C. and S. H. Manjula, "A Controlled Environment Agriculture with Hydroponics: Variants, Parameters, Methodologies and Challenges for Smart Farming," 2019 Fifteenth International Conference on Information Processing (ICINPRO), 2019, pp. 1-8, doi: 10.1109/ICInPro47689.2019.9092043.
4. C. Joshitha, P. Kanakaraja, K. S. Kumar, P. Akanksha and G. Satish, "An eye on hydroponics: The IoT initiative," 2021 7th International Conference on Electrical Energy Systems (ICEES), 2021, pp. 553-557, doi: 10.1109/ICEES51510.2021.9383694.
5. S. Gertphol, P. Chulaka and T. Changmai, "Predictive models for Lettuce quality from Internet of Things-based hydroponic farm," 2018 22nd International Computer Science and Engineering Conference (ICSEC), 2018, pp. 1-5, doi: 10.1109/ICSEC.2018.8712676.
6. S. Jaisankar, P. Nalini and K. K. Rubigha, "A Study on IoT based Low-Cost Smart Kit for Coconut Farm Management," 2020 Fourth International Conference on I-SMAC (IoT in Social, Mobile, Analytics and Cloud) (I-SMAC), 2020, pp. 161-165, doi: 10.1109/I-SMAC49090.2020.9243486.

7. M. S. Farooq, S. Riaz, A. Abid, K. Abid and M. A. Naeem, "A Survey on the Role of IoT in Agriculture for the Implementation of Smart Farming," in IEEE Access, vol. 7, pp. 156237-156271, 2019, doi: 10.1109/ACCESS.2019.2949703.
8. N. Islam, B. Ray and F. Pasandideh, "IoT Based Smart Farming: Are the LPWAN Technologies Suitable for Remote Communication?," 2020 IEEE International Conference on Smart Internet of Things (SmartIoT), 2020, pp. 270-276, doi: 10.1109/SmartIoT49966.2020.00048.
9. S. Chaikhamwang, C. Janthajirakowit and S. Fongmanee, "IoT for Smart Farm: A Case Study of the Fertilizer Mixer Prototype," 2021 Joint International Conference on Digital Arts, Media and Technology with ECTI Northern Section Conference on Electrical, Electronics, Computer and Telecommunication Engineering, 2021, pp. 136-139, doi: 10.1109/ECTIDAMTNCON51128.2021.9425708.
10. F. K. Syed, A. Paul, A. Kumar and J. Cherukuri, "Low-cost IoT+ML design for smart farming with multiple applications," 2019 10th International Conference on Computing, Communication and Networking Technologies (ICCCNT), 2019, pp. 1-5, doi: 10.1109/ICCCNT45670.2019.8944791.

# Predictive analysis of city based crops using IoT based Hydroponic system

---

ORIGINALITY REPORT

**49%**  
SIMILARITY INDEX

**11%**  
INTERNET SOURCES

**6%**  
PUBLICATIONS

**46%**  
STUDENT PAPERS

---

PRIMARY SOURCES

1	Submitted to VIT University Student Paper	39%
2	agriculture.vic.gov.au Internet Source	2%
3	www.coursehero.com Internet Source	2%
4	Submitted to Udayana University Student Paper	1%
5	hdl.handle.net Internet Source	1%
6	www.cooking-hacks.com Internet Source	<1%
7	Submitted to Indian Institute of Information Technology, Allahabad Student Paper	<1%
8	ijerat.com Internet Source	<1%
www.semanticscholar.org		

9	Internet Source	<1 %
10	Managerial Finance, Volume 30, Issue 3 (2012-04-14) Publication	<1 %
11	Submitted to Institute of Management Technology Student Paper	<1 %
12	S. Jaisankar, P. Nalini, K. Krishna Rubigha. "A Study on IoT based Low-Cost Smart Kit for Coconut Farm Management", 2020 Fourth International Conference on I-SMAC (IoT in Social, Mobile, Analytics and Cloud) (I-SMAC), 2020 Publication	<1 %
13	<a href="http://www.ijesrt.com">www.ijesrt.com</a> Internet Source	<1 %
14	Submitted to University of London External System Student Paper	<1 %
15	<a href="http://kclpure.kcl.ac.uk">kclpure.kcl.ac.uk</a> Internet Source	<1 %
16	<a href="http://mzuir.inflibnet.ac.in:8080">mzuir.inflibnet.ac.in:8080</a> Internet Source	<1 %
17	Sethavidh Gertphol, Pariyanuj Chulaka, Tanabut Changmai. "Predictive models for	<1 %

Lettuce quality from Internet of Things-based hydroponic farm", 2018 22nd International Computer Science and Engineering Conference (ICSEC), 2018

Publication

---

- |    |   |      |
|----|---|------|
| 18 | <a href="http://irjet.net">irjet.net</a><br>Internet Source   | <1 % |
| 19 | <a href="http://www.cvru.ac.in">www.cvru.ac.in</a><br>Internet Source   | <1 % |
| 20 | <a href="http://digitalcommons.wku.edu">digitalcommons.wku.edu</a><br>Internet Source   | <1 % |
| 21 | <a href="http://ieeexplore.ieee.org">ieeexplore.ieee.org</a><br>Internet Source   | <1 % |
| 22 | <a href="http://arxiv.org">arxiv.org</a><br>Internet Source   | <1 % |
| 23 | Edi Dwi Nugroho, Aji Gautama Putrada, Andrian Rakhmatsyah. "Predictive Control on Lettuce NFT-based Hydroponic IoT using Deep Neural Network", 2021 International Symposium on Electronics and Smart Devices (ISESD), 2021<br>Publication | <1 % |
| 24 | Morrisette, J. . "Temporal variation of blood and hair mercury levels in pregnancy in relation to fish consumption history in a   | <1 % |

# population living along the St. Lawrence River", Environmental Research, 200407

Publication

---

25 repository-tnmgrmu.ac.in <1 %  
Internet Source

---

26 www.proceedings.com <1 %  
Internet Source

---

Exclude quotes On

Exclude matches < 10 words

Exclude bibliography On