

(a) Confusion Matrix (N=525)

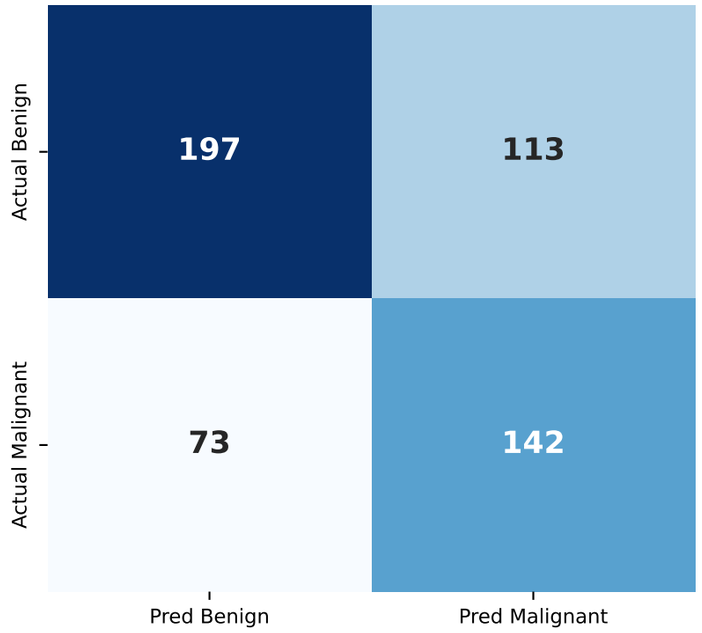


TN=197 | FP=113 | FN=73 | TP=142

(b) Normalized Confusion Matrix (%)

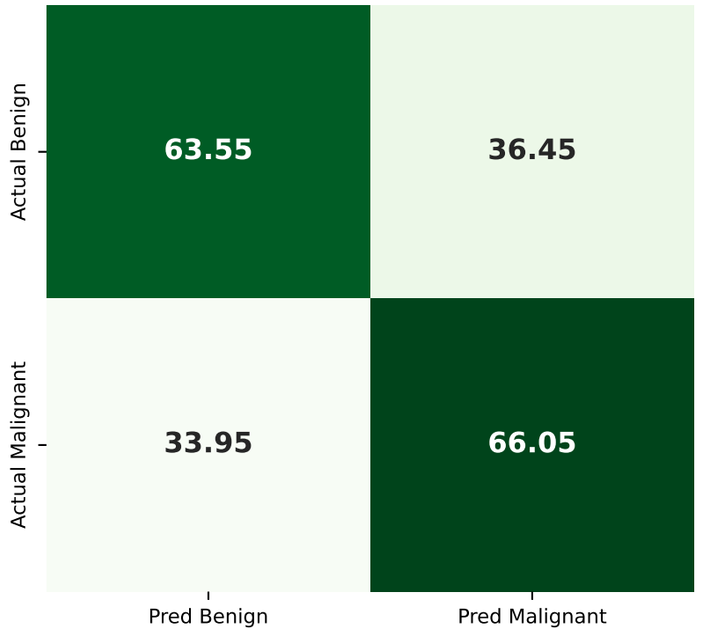


Specificity: 63.5% | Sensitivity: 66.0%


(c) Receiver Operating Characteristic (ROC)

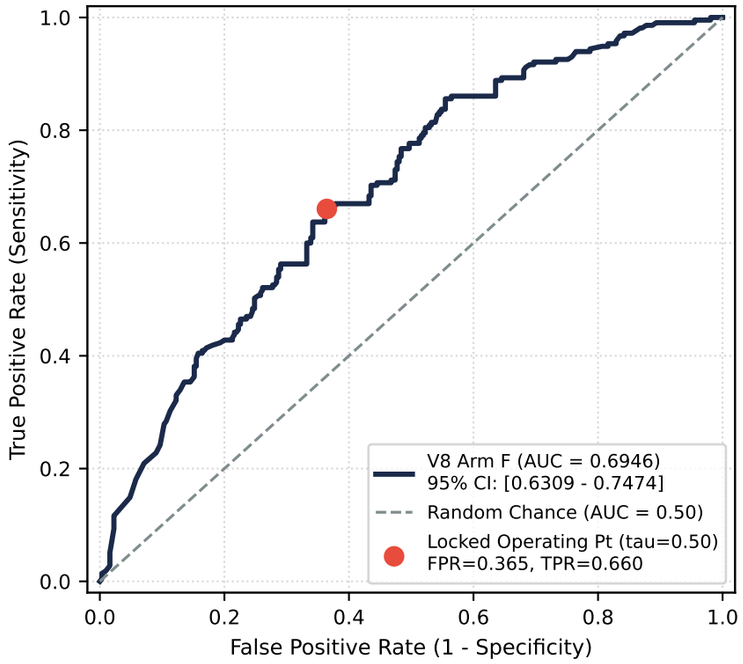


(d) Precision-Recall (PR) Curve

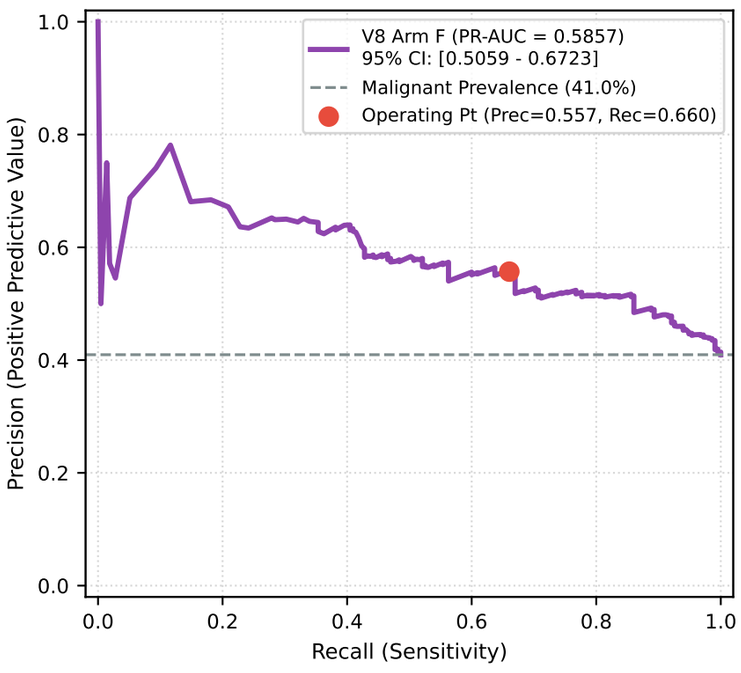


(e) Locked Evaluation Metrics (N=525)

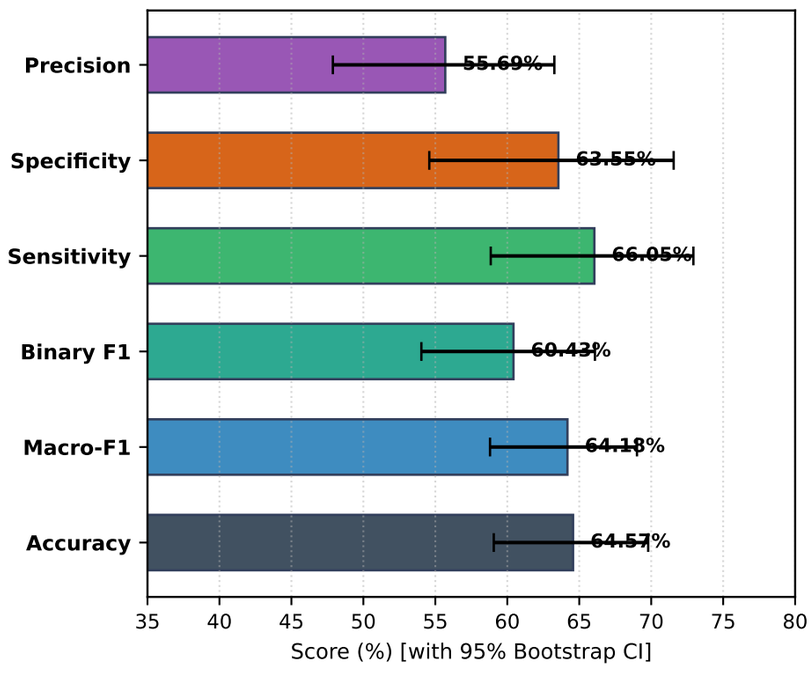


(f) Class-Disaggregated Performance

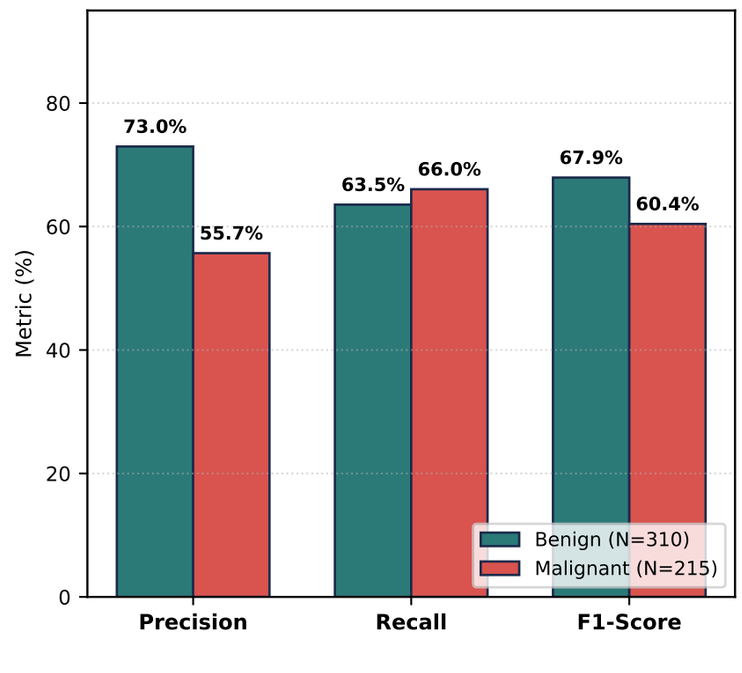

(g) Posterior Confidence Distribution

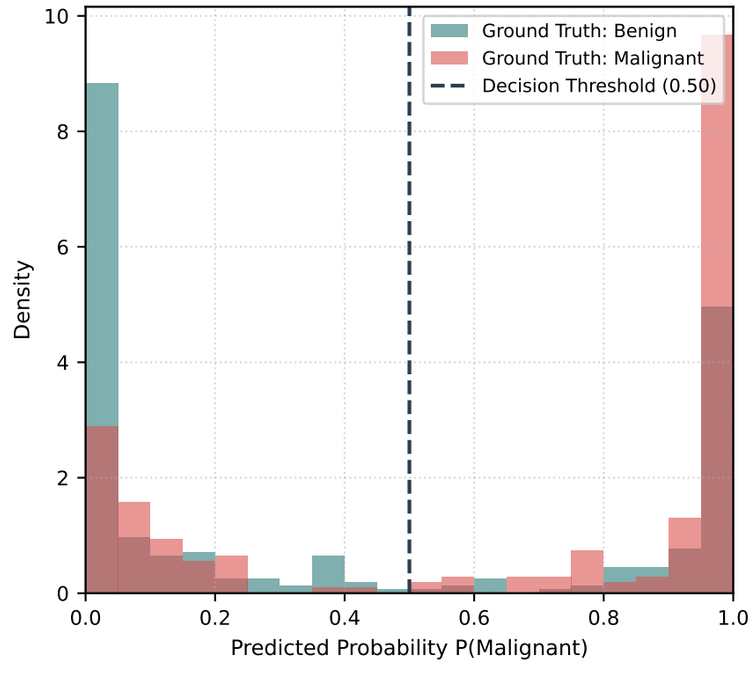

(h) Reliability Calibration Curve

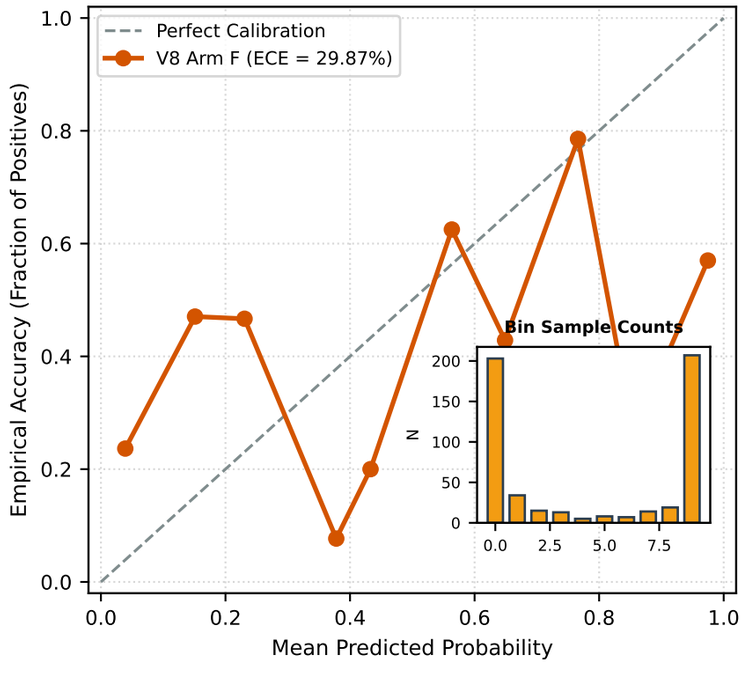

(i) Calibration Audit & Scientific Protocol

```
PROBABILITY CALIBRATION SUMMARY
===================================

• Final Brier Score:       0.3143
• Expected Calibration Error: 29.87%
• Optimal Bin Count:       10 Uniform Bins
• Calibration Cohort:      525 Locked Test Scans
• Quarantined Patients:    235 Patients (0 Leakage)

SCIENTIFIC GOVERNANCE NOTE:
-----------------------------------
1. Probability calibration evaluates predictive confidence
   alignment, not classification discrimination.
2. ECE value is strictly dependent upon the 10-bin uniform
   partitioning convention.
3. High ECE reflects raw ViT logit overconfidence;
   temperature scaling (T=1.21) was explored in V9 but
   is NOT applied to frozen V8 to preserve raw audit integrity.
```