



!!!!!! Neenga kudutha fees !!!!!!

10,000 RS

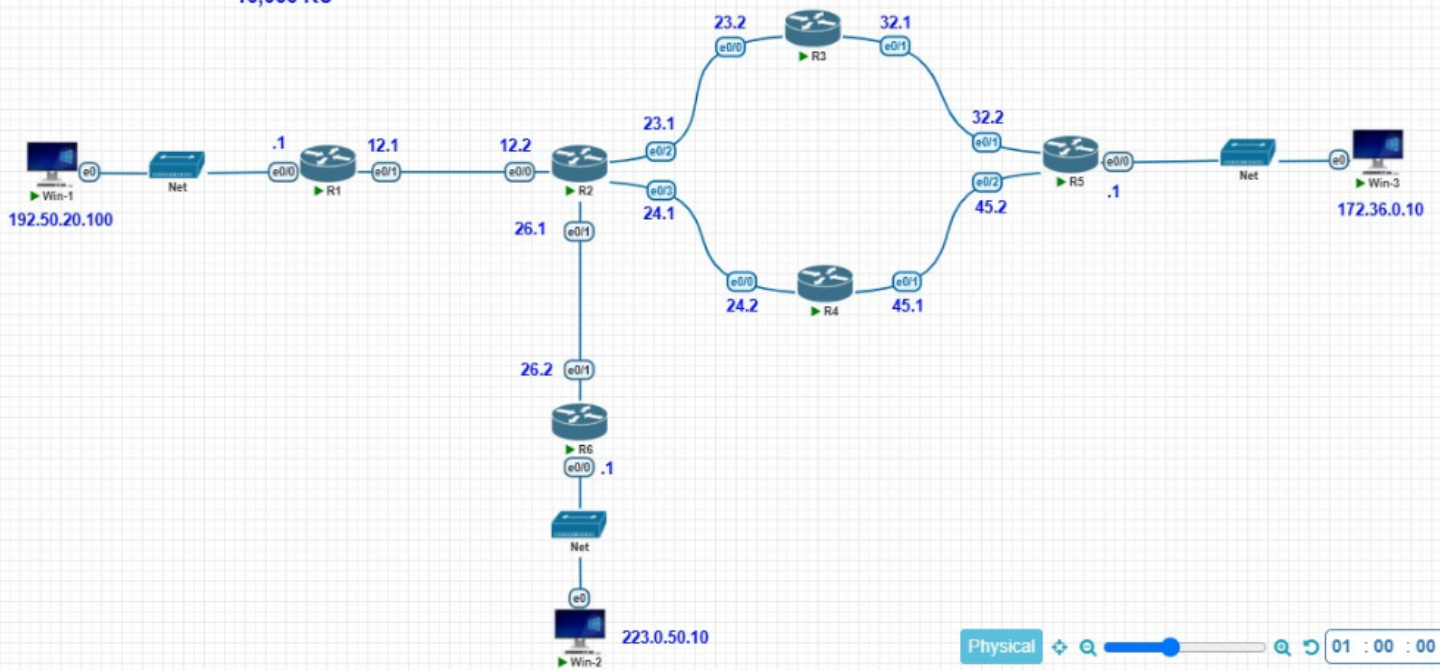

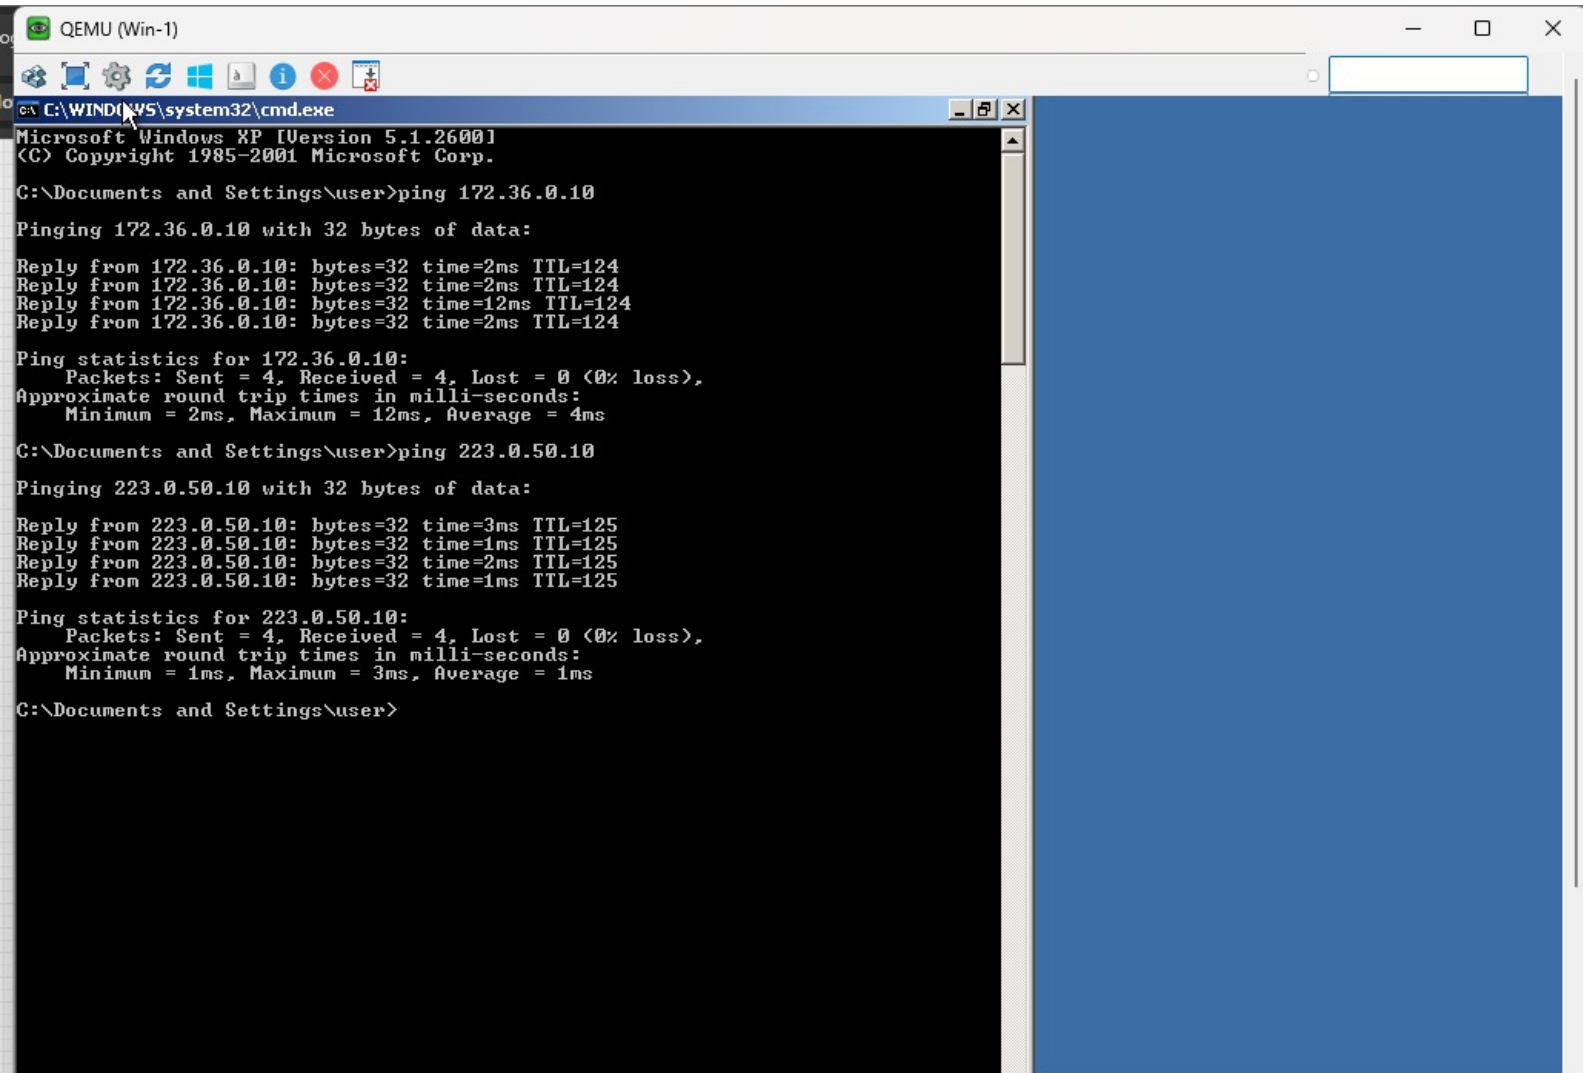

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 172.36.0.10

Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=12ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 172.36.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 12ms, Average = 4ms


C:\Documents and Settings\user>ping 223.0.50.10


Pinging 223.0.50.10 with 32 bytes of data:

Reply from 223.0.50.10: bytes=32 time=3ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=2ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125

Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 1ms

C:\Documents and Settings\user>
```

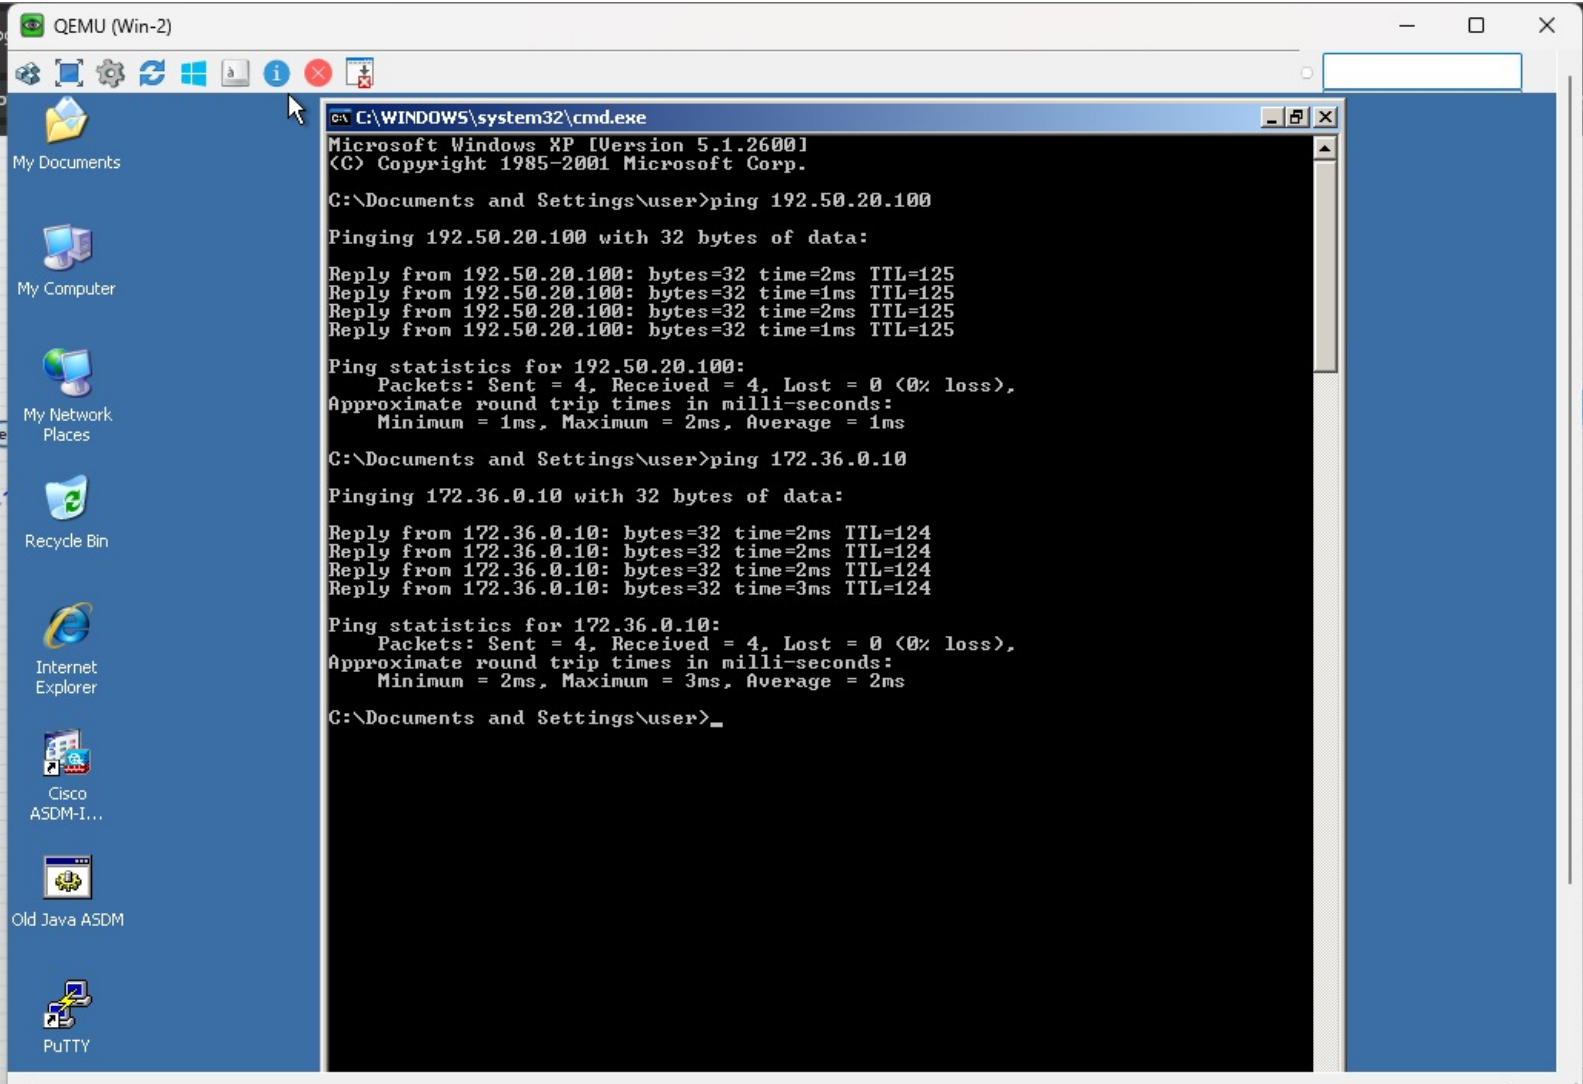

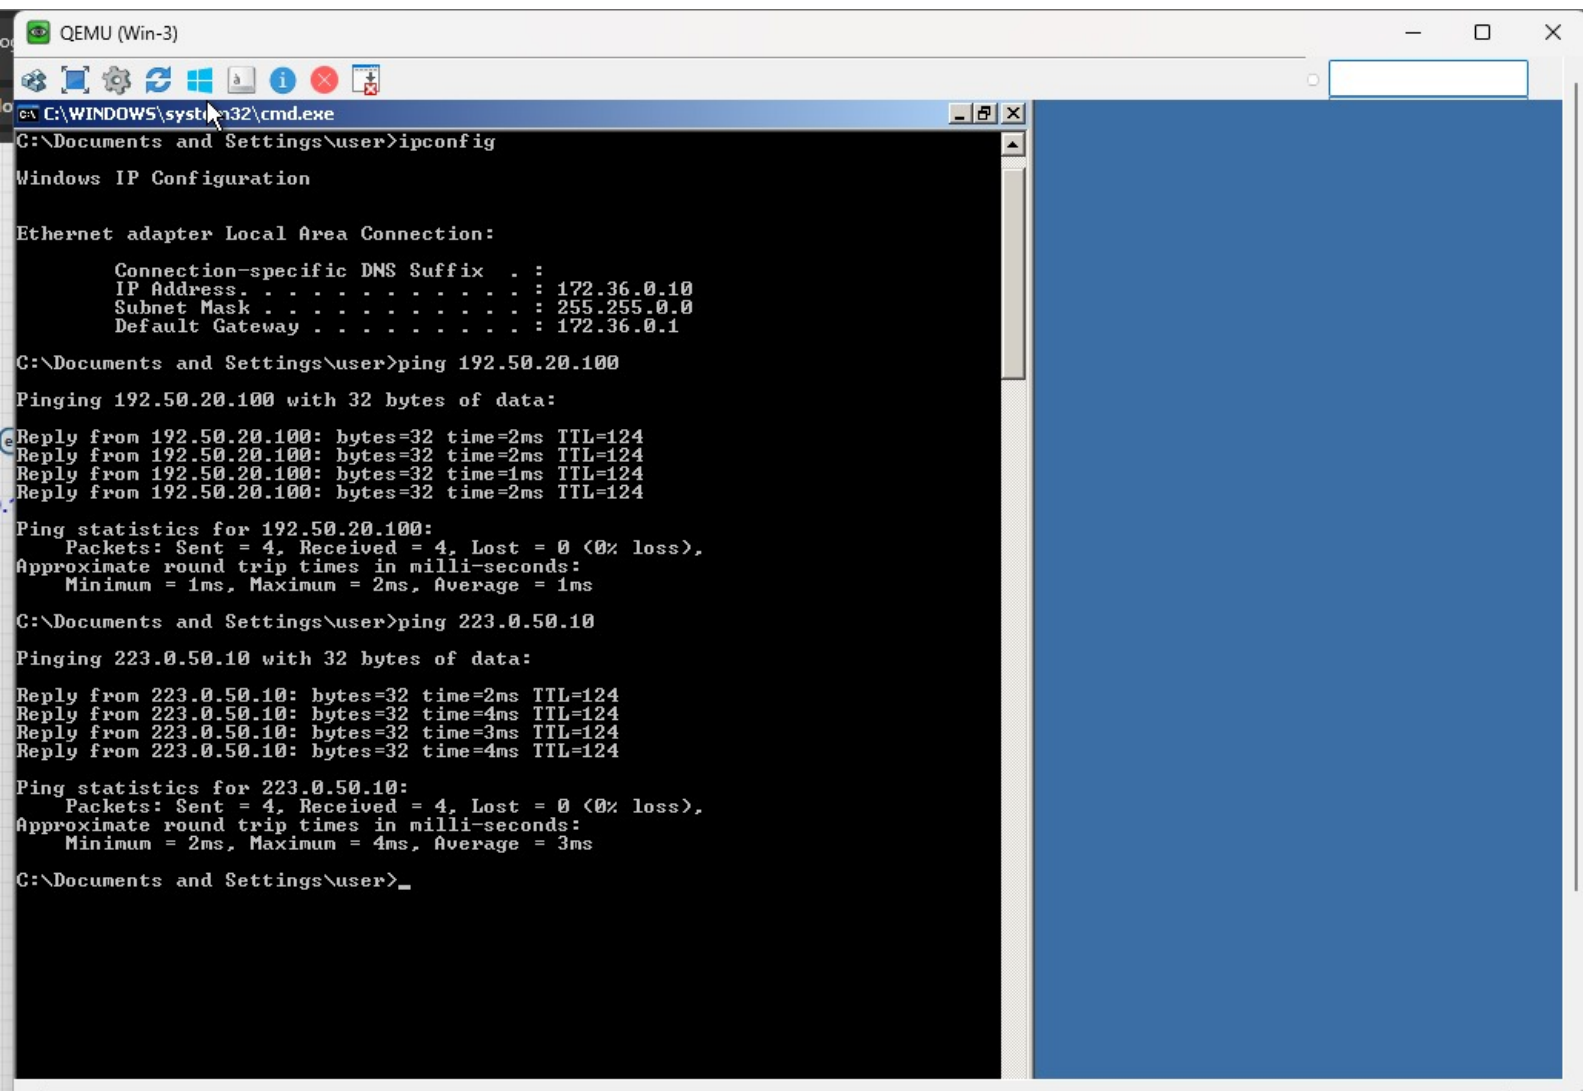

```
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . .               : 172.36.0.10
    Subnet Mask . . . . .            : 255.255.0.0
    Default Gateway . . . . .         : 172.36.0.1

C:\Documents and Settings\user>ping 192.50.20.100

Pinging 192.50.20.100 with 32 bytes of data:

Reply from 192.50.20.100: bytes=32 time=2ms TTL=124
Reply from 192.50.20.100: bytes=32 time=2ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=2ms TTL=124

Ping statistics for 192.50.20.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>ping 223.0.50.10

Pinging 223.0.50.10 with 32 bytes of data:

Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Reply from 223.0.50.10: bytes=32 time=4ms TTL=124
Reply from 223.0.50.10: bytes=32 time=3ms TTL=124
Reply from 223.0.50.10: bytes=32 time=4ms TTL=124

Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 4ms, Average = 3ms

C:\Documents and Settings\user>
```

 R1

```
Router(config-if)#no shutdown
Router(config-if)#exit
*Jul 21 07:56:29.240: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to up
*Jul 21 07:56:30.240: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/1, changed state to up
Router(config-if)#exit
Router(config)#ip route 23.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 24.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 26.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 32.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 45.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 172.30.0.0 255.255.0.0 12.0.0.2
Router(config)#ip route 223.0.50.0 255.255.255.0 12.0.0.2
Router(config)#exit
Router#
*Jul 21 08:00:49.732: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       12.0.0.0/8 is directly connected, Ethernet0/1
L       12.0.0.1/32 is directly connected, Ethernet0/1
S       23.0.0.0/8 [1/0] via 12.0.0.2
S       24.0.0.0/8 [1/0] via 12.0.0.2
S       26.0.0.0/8 [1/0] via 12.0.0.2
S       32.0.0.0/8 [1/0] via 12.0.0.2
S       45.0.0.0/8 [1/0] via 12.0.0.2
S       172.30.0.0/16 [1/0] via 12.0.0.2
    192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.50.20.0/24 is directly connected, Ethernet0/0
L       192.50.20.1/32 is directly connected, Ethernet0/0
S       223.0.50.0/24 [1/0] via 12.0.0.2
```



```
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#ip route 192.50.20.0 255.255.255.0 12.0.0.1
Router(config)#ip route 223.0.50.0 255.255.255.0 26.0.0.2
Router(config)#ip route 172.36.0.0 255.255.0.0 23.0.0.2
Router(config)#ip route 32.0.0.0 255.0.0.0 23.0.0.2
Router(config)#ip route 45.0.0.0 255.0.0.0 24.0.0.2
Router(config)#exit
Router#sh
*Jul 21 08:15:04.333: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    12.0.0.0/8 is directly connected, Ethernet0/0
L    12.0.0.2/32 is directly connected, Ethernet0/0
23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    23.0.0.0/8 is directly connected, Ethernet0/2
L    23.0.0.1/32 is directly connected, Ethernet0/2
24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    24.0.0.0/8 is directly connected, Ethernet0/3
L    24.0.0.1/32 is directly connected, Ethernet0/3
26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    26.0.0.0/8 is directly connected, Ethernet0/1
L    26.0.0.1/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 23.0.0.2
S    45.0.0.0/8 [1/0] via 24.0.0.2
S    172.36.0.0/16 [1/0] via 23.0.0.2
S    192.50.20.0/24 [1/0] via 12.0.0.1
S    223.0.50.0/24 [1/0] via 26.0.0.2
```

R3

Ethernet0/2	unassigned	YES	unset	administratively	down	down
Ethernet0/3	unassigned	YES	unset	administratively	down	down

Router#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#ip route 192.50.20.0 255.255.255.0 23.0.0.1

Router(config)#ip route 12.0.0.0 255.0.0.0 23.0.0.1

Router(config)#ip route 26.0.0.0 255.0.0.0 23.0.0.1

Router(config)#ip route 223.0.50.0 255.255.255.0 23.0.0.1

Router(config)#ip route 24.0.0.0 255.0.0.0 23.0.0.1

Router(config)#ip route 45.0.0.0 255.0.0.0 23.0.0.1

Router(config)#ip route 172.36.0.0 255.255.0.0 32.0.0.2

Router(config)#exit

Router#

*Jul 21 08:27:59.334: %SYS-5-CONFIG_I: Configured from console by console

Router#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 23.0.0.1

23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 23.0.0.0/8 is directly connected, Ethernet0/0

L 23.0.0.2/32 is directly connected, Ethernet0/0

S 24.0.0.0/8 [1/0] via 23.0.0.1

S 26.0.0.0/8 [1/0] via 23.0.0.1

32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 32.0.0.0/8 is directly connected, Ethernet0/1

L 32.0.0.1/32 is directly connected, Ethernet0/1

S 45.0.0.0/8 [1/0] via 23.0.0.1

S 172.36.0.0/16 [1/0] via 32.0.0.2

S 192.50.20.0/24 [1/0] via 23.0.0.1

S 223.0.50.0/24 [1/0] via 23.0.0.1

R4

```
Ethernet0/2          unassigned      YES unset  administratively down down
Ethernet0/3          unassigned      YES unset  administratively down down
```

Router#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#ip route 192.50.20.0 255.255.255.0 24.0.0.1

Router(config)#ip route 12.0.0.0 255.0.0.0 24.0.0.1

Router(config)#ip route 23.0.0.0 255.0.0.0 24.0.0.1

Router(config)#ip route 26.0.0.0 255.0.0.0 24.0.0.1

Router(config)#ip route 32.0.0.0 255.0.0.0 24.0.0.1

Router(config)#ip route 172.36.0.0 255.255.0.0 45.0.0.2

Router(config)#ip route 223.0.50.0 255.255.255.0 24.0.0.1

Router(config)#exit

Router#s

*Jul 21 08:39:46.759: %SYS-5-CONFIG_I: Configured from console by console

Router#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

```
S    12.0.0.0/8 [1/0] via 24.0.0.1
S    23.0.0.0/8 [1/0] via 24.0.0.1
    24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    24.0.0.0/8 is directly connected, Ethernet0/0
L    24.0.0.2/32 is directly connected, Ethernet0/0
S    26.0.0.0/8 [1/0] via 24.0.0.1
S    32.0.0.0/8 [1/0] via 24.0.0.1
    45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    45.0.0.0/8 is directly connected, Ethernet0/1
L    45.0.0.1/32 is directly connected, Ethernet0/1
S    172.36.0.0/16 [1/0] via 45.0.0.2
S    192.50.20.0/24 [1/0] via 24.0.0.1
S    223.0.50.0/24 [1/0] via 24.0.0.1
```


Ethernet0/3 unassigned YES unset administratively down down

Router#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#ip route 192.50.20.0 255.255.255.0 32.0.0.1

Router(config)#ip route 12.0.0.0 255.0.0.0 32.0.0.1

Router(config)#ip route 23.0.0.0 255.0.0.0 32.0.0.1

Router(config)#ip route 24.0.0.0 255.0.0.0 45.0.0.1

Router(config)#ip route 26.0.0.0 255.0.0.0 45.0.0.1

Router(config)#ip route 223.0.50.0 255.255.255.0 45.0.0.1

Router(config)#exit

Router#sh

*Jul 21 08:51:53.195: %SYS-5-CONFIG_I: Configured from console by console

Router#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2

E1 - OSPF external type 1, E2 - OSPF external type 2

i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2

ia - IS-IS inter area, * - candidate default, U - per-user static route

o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP

a - application route

+ - replicated route, % - next hop override, p - overrides from Pfr

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 32.0.0.1

S 23.0.0.0/8 [1/0] via 32.0.0.1

S 24.0.0.0/8 [1/0] via 45.0.0.1

S 26.0.0.0/8 [1/0] via 45.0.0.1

32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 32.0.0.0/8 is directly connected, Ethernet0/1

L 32.0.0.2/32 is directly connected, Ethernet0/1

45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 45.0.0.0/8 is directly connected, Ethernet0/2

L 45.0.0.2/32 is directly connected, Ethernet0/2

172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks

C 172.36.0.0/16 is directly connected, Ethernet0/0

L 172.36.0.1/32 is directly connected, Ethernet0/0

S 192.50.20.0/24 [1/0] via 32.0.0.1

S 223.0.50.0/24 [1/0] via 45.0.0.1

R6

Interface	IP Address	Subnet Mask	Administrative State	Operational State
Ethernet0/2	unassigned		YES unset	administratively down down
Ethernet0/3	unassigned		YES unset	administratively down down

Router#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#ip route 192.50.20.0 255.255.255.0 26.0.0.1

Router(config)#ip route 12.0.0.0 255.0.0.0 26.0.0.1

Router(config)#ip route 23.0.0.0 255.0.0.0 26.0.0.1

Router(config)#ip route 24.0.0.0 255.0.0.0 26.0.0.1

Router(config)#ip route 32.0.0.0 255.0.0.0 26.0.0.1

Router(config)#ip route 45.0.0.0 255.0.0.0 26.0.0.1

Router(config)#ip route 172.36.0.0 255.255.0.0 26.0.0.1

Router(config)#exit

Router#sho

*Jul 21 09:00:06.642: %SYS-5-CONFIG_I: Configured from console by console

Router#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 26.0.0.1

S 23.0.0.0/8 [1/0] via 26.0.0.1

S 24.0.0.0/8 [1/0] via 26.0.0.1

26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 26.0.0.0/8 is directly connected, Ethernet0/1

L 26.0.0.2/32 is directly connected, Ethernet0/1

S 32.0.0.0/8 [1/0] via 26.0.0.1

S 45.0.0.0/8 [1/0] via 26.0.0.1

S 172.36.0.0/16 [1/0] via 26.0.0.1

S 192.50.20.0/24 [1/0] via 26.0.0.1

223.0.50.0/24 is variably subnetted, 2 subnets, 2 masks

C 223.0.50.0/24 is directly connected, Ethernet0/0

L 223.0.50.1/32 is directly connected, Ethernet0/0