




```
ROUTER
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface ethernet ethernet 0/0
^
% Invalid input detected at '^' marker.

Router(config)#interface ethernet 0/0
Router(config-if)#ip address 50.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
*Jul 15 06:55:21.603: %LINK-3-UPDOWN: Interface Ethernet0/0, changed state to up
*Jul 15 06:55:22.603: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/0,
changed state to up
Router(config-if)#exit
Router(config)#exit
Router#
*Jul 15 06:55:28.268: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip interface brief
Interface                IP-Address      OK? Method Status      Protoc
ol
Ethernet0/0              50.0.0.1       YES manual up          up
Ethernet0/1              unassigned     YES unset  administratively down down
Ethernet0/2              unassigned     YES unset  administratively down down
Ethernet0/3              unassigned     YES unset  administratively down down

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#username sameem password akthar
Router(config)#line console 0
Router(config-line)#password farman
Router(config-line)#login local
Router(config-line)#exit
Router(config)#enable secret enable
Router(config)#line vty 0 4
Router(config-line)#transport input telnet
Router(config-line)#password telnet
Router(config-line)#login local
Router(config-line)#exit
Router(config)#
```

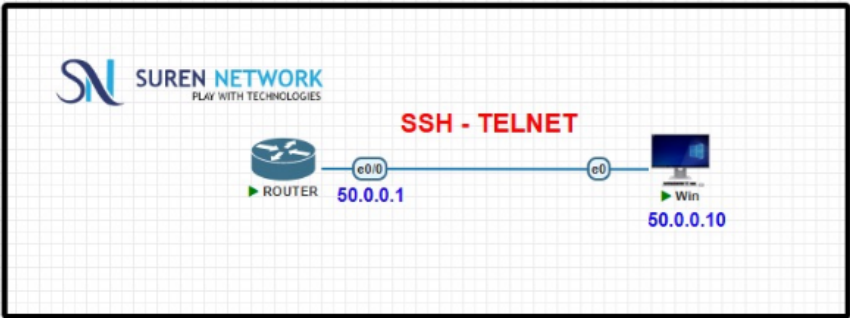