

COMP 7005

Project

Testing

Sami Roudgarian, A01294122

Harmanbir Dhillon, A00994245

December 1, 2023

Features.....	4
Running the Client.....	4
Running the Server.....	4
Running the Proxy.....	4
Running the GUI.....	5
Using IPv4 or IPv6:.....	5
Window:.....	5
Lossiness:.....	5
Test Results.....	6
Examples.....	12
Example 1.....	12
Example 2.....	12
Example 3.....	12
Example 4.....	13
Example 5.....	13
Example 6.....	13
Example 7.....	14
Example 8.....	14
Example 9.....	14
Example 10.....	14
Example 11.....	15
Example 12.....	15
Example 13.....	15
Example 14.....	15
Example 15.....	16
Example 16.....	16
Example 17.....	16
Example 18.....	16
Example 19.....	17
Example 20.....	17
Example 21.....	17
Example 22.....	17
Example 23.....	18
Example 24.....	18
Example 25.....	19
Example 26.....	19
Example 27.....	20
Example 28.....	20

Example 29.....	21
Example 30.....	21
Example 31.....	21
Example 32.....	21
Example 33.....	22
Example 34.....	22
Example 35.....	23
Example 36.....	23
Example 37.....	23
Example 38.....	24
Example 39.....	24
Example 40.....	25
Example 41.....	25
Example 42.....	26
Example 43.....	29
Example 44.....	31
Example 45.....	34
Example 46.....	35
Example 47.....	36
Example 48.....	37
Example 49.....	38

Features

Running the Client

To run the Client you have to specify:

- IP address of the Client by using the -C flag, example: ./client -C 192.168.1.88
- Port number of the Client by using the -c flag, example: ./client -c 60000
- IP address of the server by using the -S flag, example: ./client -S 192.168.1.88
- Port number of the server by using the -s flag, example: ./client -s 60000
- Help by using the -h flag, example ./client -h

You have to use ALL flags other than the help flag

Running the Server

To run the Server you have to specify:

- IP address of the Client by using the -C flag, example: ./server -C 192.168.1.88
- Port number of the Client by using the -c flag, example: ./server -c 60000
- IP address of the Server by using the -S flag, example: ./server -S 192.168.1.88
- Port number of the Server by using the -s flag, example: ./server -s 60000
- Help by using the -h flag, example ./server -h

You have to use ALL flags other than the help flag

Running the Proxy

To run the Proxy you have to specify:

- IP address of the Client by using the -C flag, example: ./proxy -C 192.168.1.88
- Port number of the Client by using the -c flag, example: ./proxy -c 60000
- IP address of the Server by using the -S flag, example: ./proxy -S 192.168.1.88
- Port number of the Server by using the -s flag, example: ./proxy -s 60000
- IP address of the Proxy by using the -P flag, example: ./proxy -S 192.168.1.88

Optional:

- Drop rate of the Client by using the -D flag, example: ./proxy -D 100
- Drop rate of the Server by using the -d flag, example: ./proxy -d 100
- Delay rate of the Client by using the -L flag, example: ./proxy -L 100
- Delay rate of the Server by using the -l flag, example: ./proxy -l 100
- Corruption rate by using the -E flag, example: ./proxy -E 100
- Help by using the -h flag, example ./proxy -h

You have to use ALL flags other than the help flag and the flags for lossiness. If you don't use the lossiness flags then they default to 0.

Running the GUI

The GUI has to be run after the Client, Server and Proxy are already running because the GUI will attempt to connect to all three.

Using IPv4 or IPv6:

The Client, Server and Proxy can run using IPv4 or IPv6. The Client, Server and Proxy have to be running either IPv4 or IPv6 at the same time.

Window:

The user can specify the size of the window in the -w flag for the Client. The Client then uses this window size when creating the window and also the Client can cumulatively remove multiple packets from the window based on the ACK number it receives from the Server.

Lossiness:

The Proxy can imitate a Lossy network by allowing the user to dynamically change the values for Drop, Delay and Corruption rates for both the Server and the Client separately. User just has to follow the prompts displayed by the menu.

Test Results

COMMAND	DESCRIPTION	STATUS	EXAMPLE
<code>./client</code>	Should tell the user they need to input the IP address of the Client	PASSED	Example 1
<code>./client -C 192.168.1.80</code>	Should tell the user that the Client port is required	PASSED	Example 2
<code>./client -C 192.168.1.80 -c 60000</code>	Should tell the user they need to input the IP address of the Server	PASSED	Example 3
<code>./client -C 192.168.1.80 -c 60000 -S 192.168.1.80</code>	Should tell the user that the Server port is required	PASSED	Example 4
<code>./client -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 8000</code>	Should tell the user that the window size is required	PASSED	Example 5
<code>./client -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 8000 -w 5</code>	Should try to initiate a connection with the server	PASSED	Example 6
<code>./client -C <IPv6> -c 60000 -S 1<IPv6> -s 8000 -w 5</code>	Should try to initiate a connection with the server using IPv6 address	PASSED	Example 7
<code>./client -C 192.168.1.80 -c 60000 -w h -S 192.168.1.80 -s 8000</code>	Tells the user that in the -w flag there is an invalid argument	PASSED	Example 8
<code>./client -C 192.168.1.800 -c 60000 -w 5 -S 192.168.1.80 -s 8000</code>	Tells the user that address family is not supported for the address "192.168.1.800"	PASSED	Example 9
<code>./client -C 192.168.1.80 -c 600000 -w 5 -S 192.168.1.80 -s 8000</code>	Tells the user that the port "600000" is out of range	PASSED	Example 10
<code>./client -C 192.168.1.80 -c 60000 -w 5 -S 192.168.1.800</code>	Tells the user that address family is not supported for the address "192.168.1.800"	PASSED	Example 11

-s 8000			
./client -C 192.168.1.80 -c 60000 -w 5 -S 192.168.1.80 -s 80000	Tells the user that the port “80000” is out of range	PASSED	Example 12
./server	Should tell the user they need to input the IP address of the Server	PASSED	Example 13
./server -S 192.168.1.80	Should tell the user that the Server port is required	PASSED	Example 14
./server -S 192.168.1.80 -s 60001	Should tell the user they need to input the IP address of the Client	PASSED	Example 15
./server -S 192.168.1.80 -s 60001 -C 192.168.1.80	Should tell the user that the Client port is required	PASSED	Example 16
./server -S 192.168.1.76 -s 60001 -C 192.168.1.80 -c 8050	Should run and wait for packets from the Client	PASSED	Example 17
./server -S <IPv6> -s 60001 -C <IPv6> -c 8050	Should run and wait for packets from the Client using an IPv6 address	PASSED	Example 18
./server -S 192.168.1.800 -s 60001 -C 192.168.1.80 -c 8050	Tells the user that address family is not supported for the address “192.168.1.800”	PASSED	Example 19
./server -S 192.168.1.80 -s 600001 -C 192.168.1.80 -c 8050	Tells the user that the port “600001” is out of range	PASSED	Example 20
./server -S 192.168.1.80 -s 60001 -C 192.168.1.800 -c 8050	Tells the user that address family is not supported for the address “192.168.1.800”	PASSED	Example 21
./server -S 192.168.1.80 -s 60001 -C 192.168.1.80 -c 80500	Tells the user that the port “80500” is out of range	PASSED	Example 22
./proxy	Tells the user that the client IP address is required	PASSED	Example 23

<code>./proxy -C 192.168.1.80</code>	Tells the user that the client port is required	PASSED	Example 24
<code>./proxy -C 192.168.1.80 -c 60000</code>	Tells the user that the server IP address is required	PASSED	Example 25
<code>./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.80</code>	Tells the user that the Server port is required	PASSED	Example 26
<code>./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 60001</code>	Tells the user that the Proxy IP address is required	PASSED	Example 27
<code>./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 60001 -P 192.168.1.80</code>	Runs and waits for packets from both the client and the server. Sets the client and server delay, drop, and corruption rates at 0, the default	PASSED	Example 28
<code>./proxy -C <IPv6> -c 60000 -S <IPv6> -s 60001 -P <IPv6></code>	Runs and waits for packets from both the client and the server. Sets the client and server delay, drop, and corruption rates at 0, the default using an IPv6 address	PASSED	Example 29
<code>./proxy -C 192.168.1.800 -c 60000 -S 192.168.1.80 -s 60001 -P 192.168.1.80</code>	Tells the user that address family is not supported for the address "192.168.1.800"	PASSED	Example 30
<code>./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.800 -s 60001 -P 192.168.1.80</code>	Tells the user that address family is not supported for the address "192.168.1.800"	PASSED	Example 31
<code>./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 60001 -P 192.168.1.800</code>	Tells the user that address family is not supported for the address "192.168.1.800"	PASSED	Example 32
<code>./proxy -C 192.168.1.80 -c 600000 -S 192.168.1.80 -s 60001 -P 192.168.1.80</code>	Tells the user that the port "600000" is out of range	PASSED	Example 33
<code>./proxy -C</code>	Tells the user that the port	PASSED	Example 34

192.168.1.80 -c 60000 -S 192.168.1.80 -s 600001 -P 192.168.1.80	“600001” is out of range	PASSED	
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 50 -d 50 -I 50 -E 50	Runs the proxy and takes in the passed in values as the drop, delay and corruption rate for client and server	PASSED	Example 35
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 500 -L 50 -d 50 -I 50 -E 50	Tells the user that the -D flag value is out of range	PASSED	Example 36
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 500 -d 50 -I 50 -E 50	Tells the user that the -L flag value is out of range	PASSED	Example 37
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 50 -d 500 -I 50 -E 50	Tells the user that the -d flag value is out of range	PASSED	Example 38
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 50 -d 500 -I 500 -E 50	Tells the user that the -I flag value is out of range	PASSED	Example 39
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 50 -d 50 -I 50 -E 500	Tells the user that the -E flag value is out of range	PASSED	Example 40
Dynamically set the proxy to 100% drop rate for the Client, and enter a message into	The proxy should drop every packet that the client sends it, so the client should keep resending the packet once the timeout	PASSED	Example 41

the command line for the client	occurs		
Dynamically set the proxy to 100% drop rate for the Server, and enter a message into the command line for the client	The proxy should forward the packet that the client sends to the server. The server should send a packet that acknowledges the packet. The proxy should then drop the ack packet. The client will keep retransmitting the same packet when the timeout occurs and the server will keep sending reacks for the packet that the proxy will drop	PASSED	Example 42
Dynamically set the proxy to 100% delay rate for the Client, and enter a message into the command line for the client	The proxy should delay every packet that the client sends it, so the client should keep resending the packet once the timeout occurs. The server will receive the same packet multiple times so it should send reack each time. The client will receive multiple reacks for the same packet and it will drop them	PASSED	Example 43
Dynamically set the proxy to 100% delay rate for the Server, and enter a message into the command line for the client	The proxy should delay every packet that the server sends it, so the client should keep resending the packet once the timeout occurs. The server will receive the same packet multiple times so it should send reack each time. The client will receive multiple reacks for the same packet and it will drop them	PASSED	Example 44
Dynamically set the proxy to 100% corruption rate, and enter a message into the command line for the client	The proxy should corrupt the data portion of the packet that the client and server sends it. It will not matter for the ack packets because they have no data. When the server receives the corrupted packet it will drop it and not send anything to the client. When the client doesn't receive an ack for the packet and the timeout occurs, it will resend the packet	PASSED	Example 45
Dynamically set the	The proxy will forward all	PASSED	Example 46

proxy to 0% for all drop, delay and corruption rate, and enter a message into the command line for the client	messages it gets to the intended recipients. There will be no retransmissions because no packets should be lost unless there actually is a problem in the network.		
	The Client, Proxy and Server will log all packets they receive and send in a .csv file	PASSED	Example 47
Cumulative Acknowledgement	When the client receives an ACK for a packet greater than the current one, it will ACK all packets up to and including the highest ACK packet		Example 48
Send one packet from the client with all lossiness values on the proxy at 0	The Client GUI should show that SENT_PACKET, RECEIVED_PACKET, RECEIVED_ACK should all be at 1. The Proxy GUI should show that SENT_PACKET and RECEIVED_PACKET are at 2. The Server GUI should show that SENT_PACKET and RECEIVED_PACKET are at 1.	PASSED	Example 49

Examples

Example 1

```
╭─ [~] ~/CLionProjects/reliable-udp/source/client/cmake-build-debug └─ p main !3
└─ ./client
Usage: ./client [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-w] <value> [-h]
Options:
-h                               Display this help message
-C <value>                      Option 'C' (required) with value, Sets the IP client_addr
-c <value>                      Option 'c' (required) with value, Sets the client port
-S <value>                      Option 'S' (required) with value, Sets the IP server_addr
-s <value>                      Option 's' (required) with value, Sets the server port
-w <value>                      Option 'w' (required) with value, Sets the window size
ERROR The client IP address is required.
In file command_line.c in function handle_arguments on line 161
```

Example 2

```
╭─ [~] ~/CLionProjects/reliable-udp/source/client/cmake-build-debug └─ p main !3
└─ ./client -C 192.168.1.80
Usage: ./client [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-w] <value> [-h]
Options:
-h                               Display this help message
-C <value>                      Option 'C' (required) with value, Sets the IP client_addr
-c <value>                      Option 'c' (required) with value, Sets the client port
-S <value>                      Option 'S' (required) with value, Sets the IP server_addr
-s <value>                      Option 's' (required) with value, Sets the server port
-w <value>                      Option 'w' (required) with value, Sets the window size
ERROR The client port is required.
In file command_line.c in function handle_arguments on line 169
```

Example 3

```
╭─ [~] ~/CLionProjects/reliable-udp/source/client/cmake-build-debug └─ p main !3
└─ ./client -C 192.168.1.80 -c 60000
Usage: ./client [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-w] <value> [-h]
Options:
-h                               Display this help message
-C <value>                      Option 'C' (required) with value, Sets the IP client_addr
-c <value>                      Option 'c' (required) with value, Sets the client port
-S <value>                      Option 'S' (required) with value, Sets the IP server_addr
-s <value>                      Option 's' (required) with value, Sets the server port
-w <value>                      Option 'w' (required) with value, Sets the window size
ERROR The server IP address is required.
In file command_line.c in function handle_arguments on line 177
```

Example 4

```
└─ [●] ~/CLionProjects/reliable-udp/source/client/cmake-build-debug └─ ⚡ main !3
  └─ ./client -C 192.168.1.80 -c 60000 -S 192.168.1.8
Usage: ./client [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-w] <value> [-h]
Options:
  -h           Display this help message
  -C <value>   Option 'C' (required) with value, Sets the IP client_addr
  -c <value>   Option 'c' (required) with value, Sets the client port
  -S <value>   Option 'S' (required) with value, Sets the IP server_addr
  -s <value>   Option 's' (required) with value, Sets the server port
  -w <value>   Option 'w' (required) with value, Sets the window size
ERROR The server port is required.
In file command_line.c in function handle_arguments on line 185
```

Example 5

```
└─ [●] ~/CLionProjects/reliable-udp/source/client/cmake-build-debug └─ ⚡ main !3
  └─ ./client -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 8000
Usage: ./client [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-w] <value> [-h]
Options:
  -h           Display this help message
  -C <value>   Option 'C' (required) with value, Sets the IP client_addr
  -c <value>   Option 'c' (required) with value, Sets the client port
  -S <value>   Option 'S' (required) with value, Sets the IP server_addr
  -s <value>   Option 's' (required) with value, Sets the server port
  -w <value>   Option 'w' (required) with value, Sets the window size
ERROR window size is required
In file command_line.c in function handle_arguments on line 193
```

Example 6

```
└─ [●] ~/CLionProjects/reliable-udp/source/client/cmake-build-debug └─ ⚡ main !3
  └─ ./client -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 8000 -w 5
binding to: 192.168.1.80:60000
Bound to socket: 192.168.1.80:60000
binding to: 192.168.1.80:61001
Bound to socket: 192.168.1.80:61001
Resent packet with seq number: 0
```

Example 7

```
└─ [~/C/reliable-udp/s/c/cmake-build-debug] ──▶ main !3
    ./client -C 2605:8d80:482:83ce:10d9:74b8:7472:d373 -c 60000 -w 5 -S 2605:8d80:482:83ce:1ce7:97f0:8664:31f7 -s 8000
    binding to: 2605:8d80:482:83ce:10d9:74b8:7472:d373:60000
    Bound to socket: 2605:8d80:482:83ce:10d9:74b8:7472:d373:60000
    binding to: 2605:8d80:482:83ce:10d9:74b8:7472:d373:61001
    Bound to socket: 2605:8d80:482:83ce:10d9:74b8:7472:d373:61001
    Server packet with ack number: 1 flag: 3 received
    removing packet with expected ack number: 1 at index: 0

Enter string below [ctrl + d] to quit
└─
```

Example 8

```
└─ [~/CLionProjects/reliable-udp/source/client/cmake-build-debug] ──▶ main !3
    ./client -C 192.168.1.80 -c 60000 -w h -S 192.168.1.80 -s 8000
    ERROR Invalid argument
    In file command_line.c in function convert_to_int on line 269
```

Example 9

```
└─ [~/CLionProjects/reliable-udp/source/client/cmake-build-debug] ──▶ main !3
    ./client -C 192.168.1.800 -c 60000 -w 5 -S 192.168.1.80 -s 8000
    ERROR Address family not supported for IP address: 192.168.1.800
    In file server_config.c in function convert_address on line 118
```

Example 10

```
└─ [~/CLionProjects/reliable-udp/source/client/cmake-build-debug] ──▶ main !3
    ./client -C 192.168.1.80 -c 600000 -w 5 -S 192.168.1.80 -s 8000
    Usage: ./client [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-w] <value> [-h]
    Options:
        -h                  Display this help message
        -C <value>          Option 'C' (required) with value, Sets the IP client_addr
        -c <value>          Option 'c' (required) with value, Sets the client port
        -S <value>          Option 'S' (required) with value, Sets the IP server_addr
        -s <value>          Option 's' (required) with value, Sets the server port
        -w <value>          Option 'w' (required) with value, Sets the window size
    for port: 600000
    ERROR in_port_t value out of range.
    In file command_line.c in function parse_in_port_t on line 249
```

Example 11

```
└─ ./client -C 192.168.1.80 -c 60000 -w 5 -S 192.168.1.800 -s 8000
ERROR Address family not supported for IP address: 192.168.1.800
In file server_config.c in function convert_address on line 118
```

Example 12

```
└─ ./client -C 192.168.1.80 -c 60000 -w 5 -S 192.168.1.80 -s 80000
Usage: ./client [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-w] <value> [-h]
Options:
-h           Display this help message
-C <value>    Option 'C' (required) with value, Sets the IP client_addr
-c <value>    Option 'c' (required) with value, Sets the client port
-S <value>    Option 'S' (required) with value, Sets the IP server_addr
-s <value>    Option 's' (required) with value, Sets the server port
-w <value>    Option 'w' (required) with value, Sets the window size
for port: 80000
ERROR in_port_t value out of range.
In file command_line.c in function parse_in_port_t on line 249
```

Example 13

```
└─ ./server
Usage: ./server [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-h]
Options:
-h           Display this help message
-C <value>    Option 'C' (required) with value, Sets the IP client_addr
-c <value>    Option 'c' (required) with value, Sets the client port
-S <value>    Option 'S' (required) with value, Sets the IP server_addr
-s <value>    Option 's' (required) with value, Sets the server port
ERROR The server IP address is required.
In file command_line.c in function handle_arguments on line 134
```

Example 14

```
└─ ./server -S 192.168.1.80
Usage: ./server [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-h]
Options:
-h           Display this help message
-C <value>    Option 'C' (required) with value, Sets the IP client_addr
-c <value>    Option 'c' (required) with value, Sets the client port
-S <value>    Option 'S' (required) with value, Sets the IP server_addr
-s <value>    Option 's' (required) with value, Sets the server port
ERROR The server port is required.
In file command_line.c in function handle_arguments on line 142
```

Example 15

```
└─ [●] ~/CLionProjects/reliable-udp/source/server/cmake-build-debug └─ ⌂ ⌂ main !3
  └─ ./server -S 192.168.1.80 -s 60001
Usage: ./server [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-h]
Options:
  -h           Display this help message
  -C <value>   Option 'C' (required) with value, Sets the IP client_addr
  -c <value>   Option 'c' (required) with value, Sets the client port
  -S <value>   Option 'S' (required) with value, Sets the IP server_addr
  -s <value>   Option 's' (required) with value, Sets the server port
ERROR The client IP address is required.
In file command_line.c in function handle_arguments on line 150
```

Example 16

```
└─ [●] ~/CLionProjects/reliable-udp/source/server/cmake-build-debug └─ ⌂ ⌂ main !3
  └─ ./server -S 192.168.1.80 -s 60001 -C 192.168.1.80
Usage: ./server [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-h]
Options:
  -h           Display this help message
  -C <value>   Option 'C' (required) with value, Sets the IP client_addr
  -c <value>   Option 'c' (required) with value, Sets the client port
  -S <value>   Option 'S' (required) with value, Sets the IP server_addr
  -s <value>   Option 's' (required) with value, Sets the server port
ERROR The client port is required.
In file command_line.c in function handle_arguments on line 158
```

Example 17

```
└─ [●] ~/CLionProjects/reliable-udp/source/server/cmake-build-debug └─ ⌂ ⌂ main !3
  └─ ./server -S 192.168.1.80 -s 60001 -C 192.168.1.80 -c 8050
binding to: 192.168.1.80:60001
Bound to socket: 192.168.1.80:60001
binding to: 192.168.1.80:61000
Bound to socket: 192.168.1.80:61000
```

Example 18

```
└─ [●] ~/C/reliable-udp/s/s/cmake-build-debug └─ ⌂ ⌂ main !13 *1 !2 ?2
  └─ ./server -S 2605:8d80:482:83ce:1c03:5b7b:1367:2817 -c 8050 -C 2605:8d80:482
    :83ce:1ce7:97f0:8664:31f7 -s 60001
binding to: 2605:8d80:482:83ce:1c03:5b7b:1367:2817:60001
Bound to socket: 2605:8d80:482:83ce:1c03:5b7b:1367:2817:60001
binding to: 2605:8d80:482:83ce:1c03:5b7b:1367:2817:61000
Bound to socket: 2605:8d80:482:83ce:1c03:5b7b:1367:2817:61000
```

Example 19

```
└─ [●] ~/CLionProjects/reliable-udp/source/server/cmake-build-debug └─ ⌂ ⌂ main !3
  └─ ./server -S 192.168.1.800 -s 60001 -C 192.168.1.80 -c 8050
    ERROR Address family not supported for IP address: 192.168.1.800
    In file server_config.c in function convert_address on line 103
```

Example 20

```
└─ [●] ~/CLionProjects/reliable-udp/source/server/cmake-build-debug └─ ⌂ ⌂ main !3
  └─ ./server -S 192.168.1.80 -s 60001 -C 192.168.1.80 -c 8050
    Usage: ./server [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-h]
    Options:
      -h           Display this help message
      -C <value>   Option 'C' (required) with value, Sets the IP client_addr
      -c <value>   Option 'c' (required) with value, Sets the client port
      -S <value>   Option 'S' (required) with value, Sets the IP server_addr
      -s <value>   Option 's' (required) with value, Sets the server port
    for port: 60001
    ERROR in_port_t value out of range.
    In file command_line.c in function parse_in_port_t on line 207
```

Example 21

```
└─ [●] ~/CLionProjects/reliable-udp/source/server/cmake-build-debug └─ ⌂ ⌂ main !3
  └─ ./server -S 192.168.1.80 -s 60001 -C 192.168.1.800 -c 8050
    ERROR Address family not supported for IP address: 192.168.1.800
    In file server_config.c in function convert_address on line 103
```

Example 22

```
└─ [●] ~/CLionProjects/reliable-udp/source/server/cmake-build-debug └─ ⌂ ⌂ main !3
  └─ ./server -S 192.168.1.80 -s 60001 -C 192.168.1.80 -c 80500
    Usage: ./server [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-h]
    Options:
      -h           Display this help message
      -C <value>   Option 'C' (required) with value, Sets the IP client_addr
      -c <value>   Option 'c' (required) with value, Sets the client port
      -S <value>   Option 'S' (required) with value, Sets the IP server_addr
      -s <value>   Option 's' (required) with value, Sets the server port
    for port: 80500
    ERROR in_port_t value out of range.
    In file command_line.c in function parse_in_port_t on line 207
```

Example 23

```
./proxy
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h Display this help message
-C <value> Option 'C' (required) with value, Sets the IP client_addr
-c <value> Option 'c' (required) with value, Sets the client port
-S <value> Option 'S' (required) with value, Sets the IP server_addr
-s <value> Option 's' (required) with value, Sets the server port
-P <value> Option 'P' (required) with value, Sets the IP proxy_addr
-D <value> Option 'D' (required) with value, Sets the client drop rate
-d <value> Option 'd' (required) with value, Sets the server drop rate
-L <value> Option 'L' (required) with value, Sets the client delay rate
-l <value> Option 'l' (required) with value, Sets the server delay rate
-E <value> Option 'E' (required) with value, Sets the corruption rate
ERROR The client IP address is required.
In file command_line.c in function handle_arguments on line 302
```

Example 24

```
./proxy -C 192.168.1.80
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h Display this help message
-C <value> Option 'C' (required) with value, Sets the IP client_addr
-c <value> Option 'c' (required) with value, Sets the client port
-S <value> Option 'S' (required) with value, Sets the IP server_addr
-s <value> Option 's' (required) with value, Sets the server port
-P <value> Option 'P' (required) with value, Sets the IP proxy_addr
-D <value> Option 'D' (required) with value, Sets the client drop rate
-d <value> Option 'd' (required) with value, Sets the server drop rate
-L <value> Option 'L' (required) with value, Sets the client delay rate
-l <value> Option 'l' (required) with value, Sets the server delay rate
-E <value> Option 'E' (required) with value, Sets the corruption rate
ERROR The client port is required.
In file command_line.c in function handle_arguments on line 310
```

Example 25

```
╭─ [~] ➜ ~/CLionProjects/reliable-udp/source/proxy/cmake-build-debug ➜ ⚡ main !3
└─ ./proxy -C 192.168.1.80 -c 60000
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h Display this help message
-C <value> Option 'C' (required) with value, Sets the IP client_addr
-c <value> Option 'c' (required) with value, Sets the client port
-S <value> Option 'S' (required) with value, Sets the IP server_addr
-s <value> Option 's' (required) with value, Sets the server port
-P <value> Option 'P' (required) with value, Sets the IP proxy_addr
-D <value> Option 'D' (required) with value, Sets the client drop rate
-d <value> Option 'd' (required) with value, Sets the server drop rate
-L <value> Option 'L' (required) with value, Sets the client delay rate
-l <value> Option 'l' (required) with value, Sets the server delay rate
-E <value> Option 'E' (required) with value, Sets the corruption rate
ERROR The server IP address is required.
In file command_line.c in function handle_arguments on line 318
```

Example 26

```
╭─ [~] ➜ ~/CLionProjects/reliable-udp/source/proxy/cmake-build-debug ➜ ⚡ main !3
└─ ./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.80
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h Display this help message
-C <value> Option 'C' (required) with value, Sets the IP client_addr
-c <value> Option 'c' (required) with value, Sets the client port
-S <value> Option 'S' (required) with value, Sets the IP server_addr
-s <value> Option 's' (required) with value, Sets the server port
-P <value> Option 'P' (required) with value, Sets the IP proxy_addr
-D <value> Option 'D' (required) with value, Sets the client drop rate
-d <value> Option 'd' (required) with value, Sets the server drop rate
-L <value> Option 'L' (required) with value, Sets the client delay rate
-l <value> Option 'l' (required) with value, Sets the server delay rate
-E <value> Option 'E' (required) with value, Sets the corruption rate
ERROR The server port is required.
In file command_line.c in function handle_arguments on line 326
```

Example 27

```
~/CLionProjects/reliable-udp/source/proxy/cmake-build-debug main !3
./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 60001
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h Display this help message
-C <value> Option 'C' (required) with value, Sets the IP client_addr
-c <value> Option 'c' (required) with value, Sets the client port
-S <value> Option 'S' (required) with value, Sets the IP server_addr
-s <value> Option 's' (required) with value, Sets the server port
-P <value> Option 'P' (required) with value, Sets the IP proxy_addr
-D <value> Option 'D' (required) with value, Sets the client drop rate
-d <value> Option 'd' (required) with value, Sets the server drop rate
-L <value> Option 'L' (required) with value, Sets the client delay rate
-l <value> Option 'l' (required) with value, Sets the server delay rate
-E <value> Option 'E' (required) with value, Sets the corruption rate
ERROR The proxy IP address is required.
In file command_line.c in function handle_arguments on line 334
```

Example 28

```
~/CLionProjects/reliable-udp/source/proxy/cmake-build-debug main !3
./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 60001 -P 192.168.1.80
Binding to: 192.168.1.80:8000
Bound to socket: 192.168.1.80:8000
Binding to: 192.168.1.80:8050
Bound to socket: 192.168.1.80:8050
Binding to: 192.168.1.80:61060
Bound to socket: 192.168.1.80:61060

Dynamic Proxy Lossiness Value:
1. Client Losiness
2. Server Losiness
3. Data Corruption
4. Exit
Enter your Answer: 
```

Example 29

```
~/CL/reliable-udp/s/p/cmake-build-debug main ↵ 84 ?1
./proxy -C 2605:8d80:482:83ce:10d9:74b8:7472:d373 -S 2605:8d80:482:83ce:1c03
:5b7b:1367:2817 -P 2605:8d80:482:83ce:1ce7:97f0:8664:31f7 -s 60001 -c 60000 -D
0 -L 0 -d 0 -l 0 -E 0
Binding to: 2605:8d80:482:83ce:1ce7:97f0:8664:31f7:8000
Bound to socket: 2605:8d80:482:83ce:1ce7:97f0:8664:31f7:8000
Binding to: 2605:8d80:482:83ce:1ce7:97f0:8664:31f7:8050
Bound to socket: 2605:8d80:482:83ce:1ce7:97f0:8664:31f7:8050
Binding to: 2605:8d80:482:83ce:1ce7:97f0:8664:31f7:61060
Bound to socket: 2605:8d80:482:83ce:1ce7:97f0:8664:31f7:61060

Dynamic Proxy Lossiness Value:
1. Client Losiness
2. Server Losiness
3. Data Corruption
4. Exit
```

Example 30

```
~/CLionProjects/reliable-udp/source/proxy/cmake-build-debug main !3
./proxy -C 192.168.1.800 -c 60000 -S 192.168.1.80 -s 60001 -P 192.168.1.80
ERROR Address family not supported for IP address: 192.168.1.800
In file server_config.c in function convert_address on line 145
```

Example 31

```
~/CLionProjects/reliable-udp/source/proxy/cmake-build-debug main !3
./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.800 -s 60001 -P 192.168.1.80
ERROR Address family not supported for IP address: 192.168.1.800
In file server_config.c in function convert_address on line 145
```

Example 32

```
~/CLionProjects/reliable-udp/source/proxy/cmake-build-debug main !3
./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 60001 -P 192.168.1.800
ERROR Address family not supported for IP address: 192.168.1.800
In file server_config.c in function convert_address on line 145
```

Example 33

```
╭─ [?] ~/CLionProjects/reliable-udp/source/proxy/cmake-build-debug └─ p main !3
└─ ./proxy -C 192.168.1.80 -c 600000 -S 192.168.1.80 -s 60001 -P 192.168.1.80
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h                               Display this help message
-C <value>                      Option 'C' (required) with value, Sets the IP client_addr
-c <value>                      Option 'c' (required) with value, Sets the client port
-S <value>                      Option 'S' (required) with value, Sets the IP server_addr
-s <value>                      Option 's' (required) with value, Sets the server port
-P <value>                      Option 'P' (required) with value, Sets the IP proxy_addr
-D <value>                      Option 'D' (required) with value, Sets the client drop rate
-d <value>                      Option 'd' (required) with value, Sets the server drop rate
-L <value>                      Option 'L' (required) with value, Sets the client delay rate
-l <value>                      Option 'l' (required) with value, Sets the server delay rate
-E <value>                      Option 'E' (required) with value, Sets the corruption rate
for port: 600000
ERROR in_port_t value out of range.
In file command_line.c in function parse_in_port_t on line 422
```

Example 34

```
╭─ [?] ~/CLionProjects/reliable-udp/source/proxy/cmake-build-debug └─ p main !3
└─ ./proxy -C 192.168.1.80 -c 60000 -S 192.168.1.80 -s 600001 -P 192.168.1.80
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h                               Display this help message
-C <value>                      Option 'C' (required) with value, Sets the IP client_addr
-c <value>                      Option 'c' (required) with value, Sets the client port
-S <value>                      Option 'S' (required) with value, Sets the IP server_addr
-s <value>                      Option 's' (required) with value, Sets the server port
-P <value>                      Option 'P' (required) with value, Sets the IP proxy_addr
-D <value>                      Option 'D' (required) with value, Sets the client drop rate
-d <value>                      Option 'd' (required) with value, Sets the server drop rate
-L <value>                      Option 'L' (required) with value, Sets the client delay rate
-l <value>                      Option 'l' (required) with value, Sets the server delay rate
-E <value>                      Option 'E' (required) with value, Sets the corruption rate
for port: 600001
ERROR in_port_t value out of range.
In file command_line.c in function parse_in_port_t on line 422
```

Example 35

```
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 50 -d 50 -l 50 -E 50
Binding to: 192.168.1.80:8000
Bound to socket: 192.168.1.80:8000
Binding to: 192.168.1.80:8050
Bound to socket: 192.168.1.80:8050
Binding to: 192.168.1.80:61060
Bound to socket: 192.168.1.80:61060

Dynamic Proxy Lossiness Value:
1. Client Lossiness
2. Server Lossiness
3. Data Corruption
4. Exit
Enter your Answer:
```

Example 36

```
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 500 -L 50 -d 50 -l 50 -E 50
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h Display this help message
-C <value> Option 'C' (required) with value, Sets the IP client_addr
-c <value> Option 'c' (required) with value, Sets the client port
-S <value> Option 'S' (required) with value, Sets the IP server_addr
-s <value> Option 's' (required) with value, Sets the server port
-P <value> Option 'P' (required) with value, Sets the IP proxy_addr
-D <value> Option 'D' (required) with value, Sets the client drop rate
-d <value> Option 'd' (required) with value, Sets the server drop rate
-L <value> Option 'L' (required) with value, Sets the client delay rate
-l <value> Option 'l' (required) with value, Sets the server delay rate
-E <value> Option 'E' (required) with value, Sets the corruption rate
ERROR 500 value out of range in the -D flag

In file command_line.c in function convert_to_int on line 459
```

Example 37

```
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 500 -d 50 -l 50 -E 50
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h Display this help message
-C <value> Option 'C' (required) with value, Sets the IP client_addr
-c <value> Option 'c' (required) with value, Sets the client port
-S <value> Option 'S' (required) with value, Sets the IP server_addr
-s <value> Option 's' (required) with value, Sets the server port
-P <value> Option 'P' (required) with value, Sets the IP proxy_addr
-D <value> Option 'D' (required) with value, Sets the client drop rate
-d <value> Option 'd' (required) with value, Sets the server drop rate
-L <value> Option 'L' (required) with value, Sets the client delay rate
-l <value> Option 'l' (required) with value, Sets the server delay rate
-E <value> Option 'E' (required) with value, Sets the corruption rate
ERROR 500 value out of range in the -L flag

In file command_line.c in function convert_to_int on line 459
```

Example 38

```
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 50 -d 500 -l 50 -E 50
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h                               Display this help message
-C <value>                      Option 'C' (required) with value, Sets the IP client_addr
-c <value>                      Option 'c' (required) with value, Sets the client port
-S <value>                      Option 'S' (required) with value, Sets the IP server_addr
-s <value>                      Option 's' (required) with value, Sets the server port
-P <value>                      Option 'P' (required) with value, Sets the IP proxy_addr
-D <value>                      Option 'D' (required) with value, Sets the client drop rate
-d <value>                      Option 'd' (required) with value, Sets the server drop rate
-L <value>                      Option 'L' (required) with value, Sets the client delay rate
-l <value>                      Option 'l' (required) with value, Sets the server delay rate
-E <value>                      Option 'E' (required) with value, Sets the corruption rate
ERROR 500 value out of range in the -d flag
In file command_line.c in function convert_to_int on line 459
```

Example 39


```
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 50 -d 500 -l 50 -E 50
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h                               Display this help message
-C <value>                      Option 'C' (required) with value, Sets the IP client_addr
-c <value>                      Option 'c' (required) with value, Sets the client port
-S <value>                      Option 'S' (required) with value, Sets the IP server_addr
-s <value>                      Option 's' (required) with value, Sets the server port
-P <value>                      Option 'P' (required) with value, Sets the IP proxy_addr
-D <value>                      Option 'D' (required) with value, Sets the client drop rate
-d <value>                      Option 'd' (required) with value, Sets the server drop rate
-L <value>                      Option 'L' (required) with value, Sets the client delay rate
-l <value>                      Option 'l' (required) with value, Sets the server delay rate
-E <value>                      Option 'E' (required) with value, Sets the corruption rate
ERROR 500 value out of range in the -l flag
In file command_line.c in function convert_to_int on line 459
```

Example 40

```
./proxy -C 192.168.1.80 -S 192.168.1.80 -P 192.168.1.80 -s 60001 -c 60000 -D 50 -L 50 -d 50 -l 50 -E 500
Usage: ./proxy [-C] <value> [-c] <value> [-S] <value> [-s] <value> [-P] <value>
[-w] <value> [-D] <value> [-d] <value> [-L] <value> [-l] <value> [-E] <value> [-h]
Options:
-h                               Display this help message
-C <value>                      Option 'C' (required) with value, Sets the IP client_addr
-c <value>                      Option 'c' (required) with value, Sets the client port
-S <value>                      Option 'S' (required) with value, Sets the IP server_addr
-s <value>                      Option 's' (required) with value, Sets the server port
-P <value>                      Option 'P' (required) with value, Sets the IP proxy_addr
-D <value>                      Option 'D' (required) with value, Sets the client drop rate
-d <value>                      Option 'd' (required) with value, Sets the server drop rate
-L <value>                      Option 'L' (required) with value, Sets the client delay rate
-l <value>                      Option 'l' (required) with value, Sets the server delay rate
-E <value>                      Option 'E' (required) with value, Sets the corruption rate
ERROR 500 value out of range in the -E flag

In file command_line.c in function convert_to_int on line 459
```

Example 41

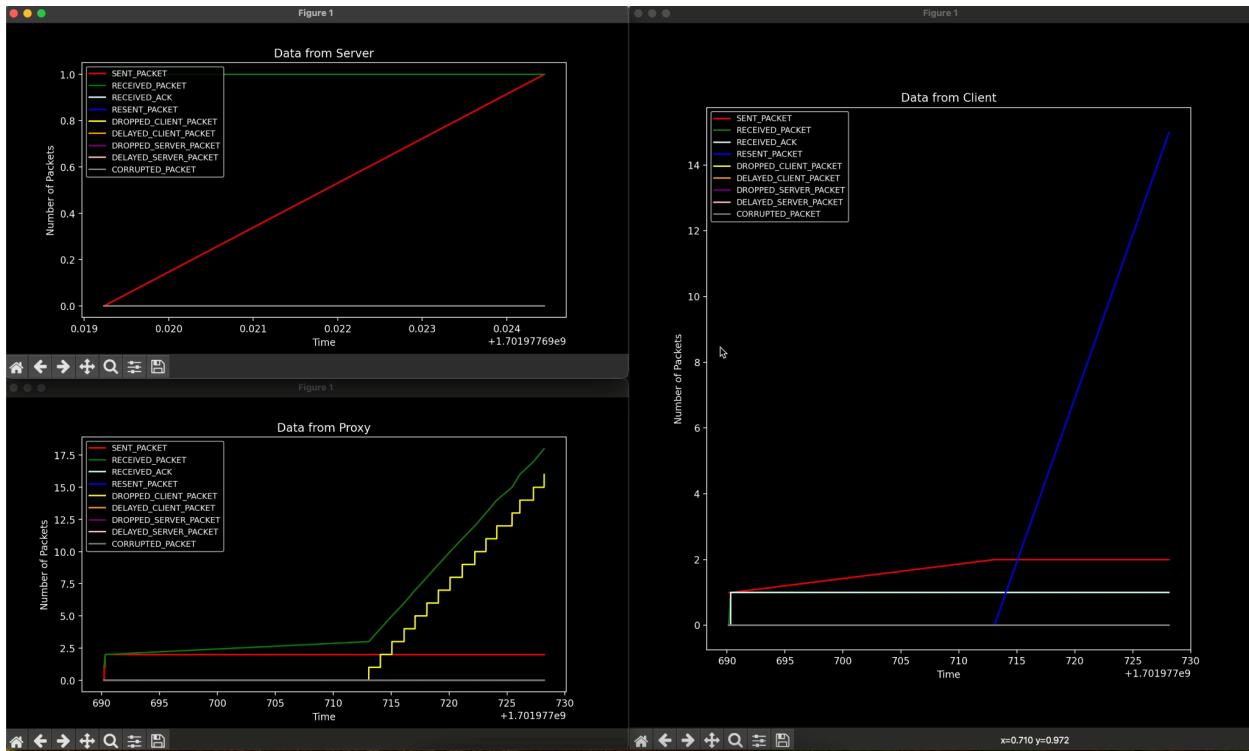

Example 42

```

Enter Server's Drop Rate: 100
Server Drop and Delay rate:
1. Drop Rate
2. Delay Rate
3. Back
Enter your Answer: Client packet with seq number: 64 ack number: 101 flags: 6 received
delay: 0 drop 0 corruption: 0
Client packet with seq number: 64 ack number: 101 flags: 6 sent
Server packet with seq number: 101 ack number: 93 flags: 2 received
delay: 0 drop 100 corruption: 0
Server packet with seq number: 101 ack number: 93 flags: 2 dropped
Client packet with seq number: 64 ack number: 101 flags: 6 received
delay: 0 drop 0 corruption: 0
Client packet with seq number: 64 ack number: 101 flags: 6 sent
Server packet with seq number: 101 ack number: 93 flags: 2 received
delay: 0 drop 100 corruption: 0
Server packet with seq number: 101 ack number: 93 flags: 2 dropped

```


```
expected: 64
RECEIVED:
seq number: 64 data: this is 100 server drop rate

expected: 64 got: 64
SENDING:
ack number: 93
expected: 93
RECEIVED:
seq number: 64 data: this is 100 server drop rate

expected: 93 got: 64
SENDING:
ack number: 93
[
```

```
this is 100 server drop rate
Client packet with SEQ number: 64 sent
```

```
Enter string below [ctrl + d] to quit
Resent packet with seq number: 64
```

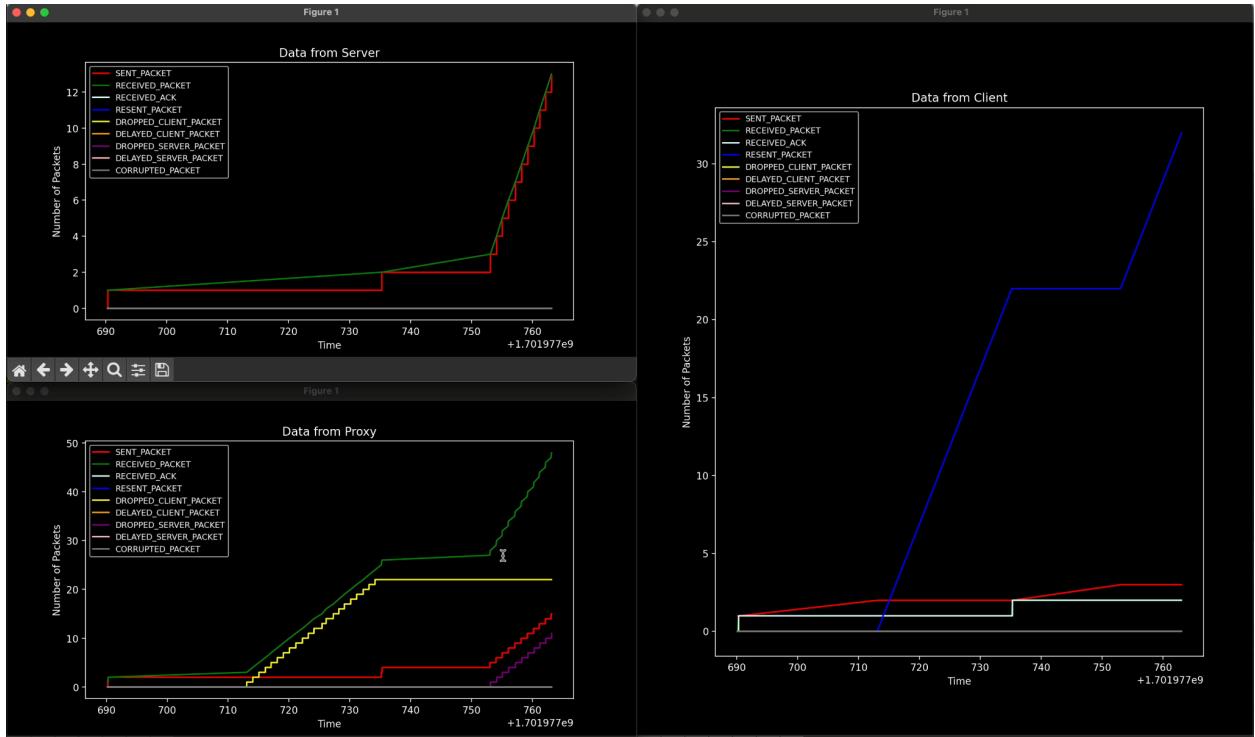

Example 43

```
Enter Client's Delay Rate: 100
Client Drop and Delay rate:
1. Drop Rate
2. Delay Rate
3. Back
Enter your Answer: Client packet with seq number: 93 ack number: 101 flags: 6 received
delay: 100 drop 0 corruption: 0
Client packet with seq number: 93 ack number: 101 flags: 6 delayed
Client packet with seq number: 93 ack number: 101 flags: 6 delayed for 5 seconds
Client packet with seq number: 93 ack number: 101 flags: 6 received
delay: 100 drop 0 corruption: 0
Client packet with seq number: 93 ack number: 101 flags: 6 delayed
Client packet with seq number: 93 ack number: 101 flags: 6 delayed for 5 seconds
Client packet with seq number: 93 ack number: 101 flags: 6 received
delay: 100 drop 0 corruption: 0
Client packet with seq number: 93 ack number: 101 flags: 6 delayed
Client packet with seq number: 93 ack number: 101 flags: 6 delayed for 5 seconds
```

```
this is 100 delay rate for client
Client packet with SEQ number: 93 sent

Enter string below [ctrl + d] to quit
Resent packet with seq number: 93
Server packet with ack number: 127 flags: 2 received
received ack
removing packet with expected ack number: 127 at index: 0
Server packet with ack number: 127 flags: 2 received
received ack
Server packet with ack number: 127 flags: 2 received
received ack
Server packet with ack number: 127 flags: 2 received
received ack
Server packet with ack number: 127 flags: 2 received
received ack
Server packet with ack number: 127 flags: 2 received
received ack
```


```

expected: 93 got: 93
SENDING:
ack number: 127
expected: 127
RECEIVED:
seq number: 93 data: this is 100 delay rate for client

expected: 127 got: 93
SENDING:
ack number: 127
RECEIVED:
seq number: 93 data: this is 100 delay rate for client

expected: 127 got: 93
SENDING:
ack number: 127

```

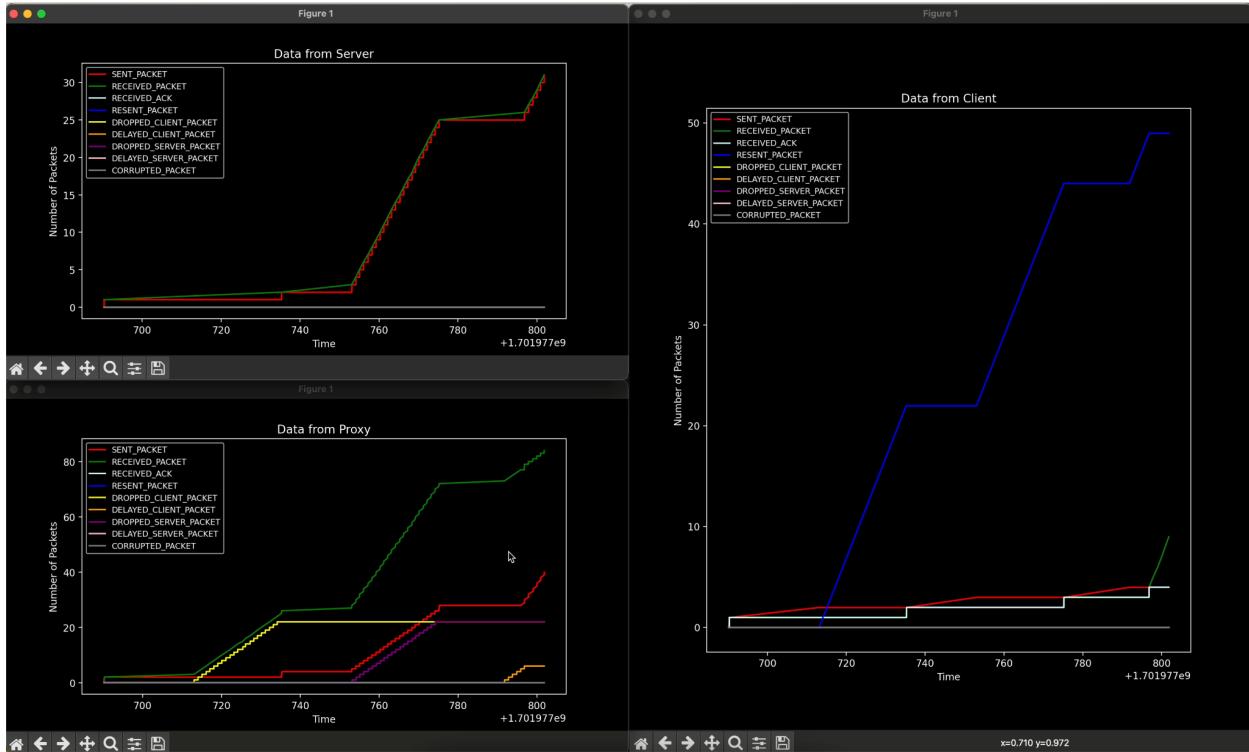

Example 44

```
Enter Server's Delay Rate: 100
Server Drop and Delay rate:
1. Drop Rate
2. Delay Rate
3. Back
Enter your Answer: Client packet with seq number: 127 ack number: 101 flags: 6
received
delay: 0 drop 0 corruption: 0
Client packet with seq number: 127 ack number: 101 flags: 6 sent
Server packet with seq number: 101 ack number: 157 flags: 2 received
delay: 100 drop 0 corruption: 0
Server packet with seq number: 101 ack number: 157 flags: 2 delayed for 5 seconds
Client packet with seq number: 127 ack number: 101 flags: 6 received
delay: 0 drop 0 corruption: 0
Client packet with seq number: 127 ack number: 101 flags: 6 sent
Server packet with seq number: 101 ack number: 157 flags: 2 received
delay: 100 drop 0 corruption: 0
Server packet with seq number: 101 ack number: 157 flags: 2 delayed for 5 seconds
□
```

```
this is 100 server delay rate
Client packet with SEQ number: 127 sent

Enter string below [ctrl + d] to quit
Resent packet with seq number: 127
Server packet with ack number: 157 flags: 2 received
received ack
removing packet with expected ack number: 157 at index: 1
Server packet with ack number: 157 flags: 2 received
received ack
Server packet with ack number: 157 flags: 2 received
received ack
Server packet with ack number: 157 flags: 2 received
received ack
Server packet with ack number: 157 flags: 2 received
received ack
Server packet with ack number: 157 flags: 2 received
received ack
```

```
RECEIVED:
seq number: 127 data: this is 100 server delay rate

expected: 127 got: 127
SENDING:
ack number: 157
expected: 157
RECEIVED:
seq number: 127 data: this is 100 server delay rate

expected: 157 got: 127
SENDING:
ack number: 157
```



Example 45

```
Enter Data Corruption's Rate: 100

Dynamic Proxy Lossiness Value:
1. Client Losiness
2. Server Losiness
3. Data Corruption
4. Exit
Enter your Answer: Client packet with seq number: 1 ack number: 101 flags: 6 received
delay: 0 drop 0 corruption: 100
Client packet with seq number: 1 ack number: 101 flags: 6 corrupted
Client packet with seq number: 1 ack number: 101 flags: 6 sent
Client packet with seq number: 1 ack number: 101 flags: 6 received
delay: 0 drop 0 corruption: 100
Client packet with seq number: 1 ack number: 101 flags: 6 corrupted
Client packet with seq number: 1 ack number: 101 flags: 6 sent
Client packet with seq number: 1 ack number: 101 flags: 6 received
delay: 0 drop 0 corruption: 100
Client packet with seq number: 1 ack number: 101 flags: 6 corrupted
Client packet with seq number: 1 ack number: 101 flags: 6 sent
```


```
RECEIVED:
seq number: 1 data: Thhw(hs05@rc {0]@4ioN ratu w$ S~oh@ano@`xeaui&e@y@ a#k$b`#0
RECEIVED:
seq number: 1 data: 4ii3 @Y 140 c@ssup5cnnra<d-E@!snoudd
RECEIVED:
seq number: 1 data: d@kr"isr1"1@?vr}pti ~ pcue$sesh@sndh.ot vD+emWE(un`@bk bccn` 

RECEIVED:
seq number: 1 data: thi@r040
RECEIVED:
seq number: 1 data: Tjhs@yc 14 0#jb@}`4io@$RAq0(w%`qhN5ld@not r@kc we@al qcrA@j"
```

this is 100 corruption rate we should not receive an ack back

Client packet with SEQ number: 1 sent

```
Enter string below [ctrl + d] to quit
Resent packet with seq number: 1
```

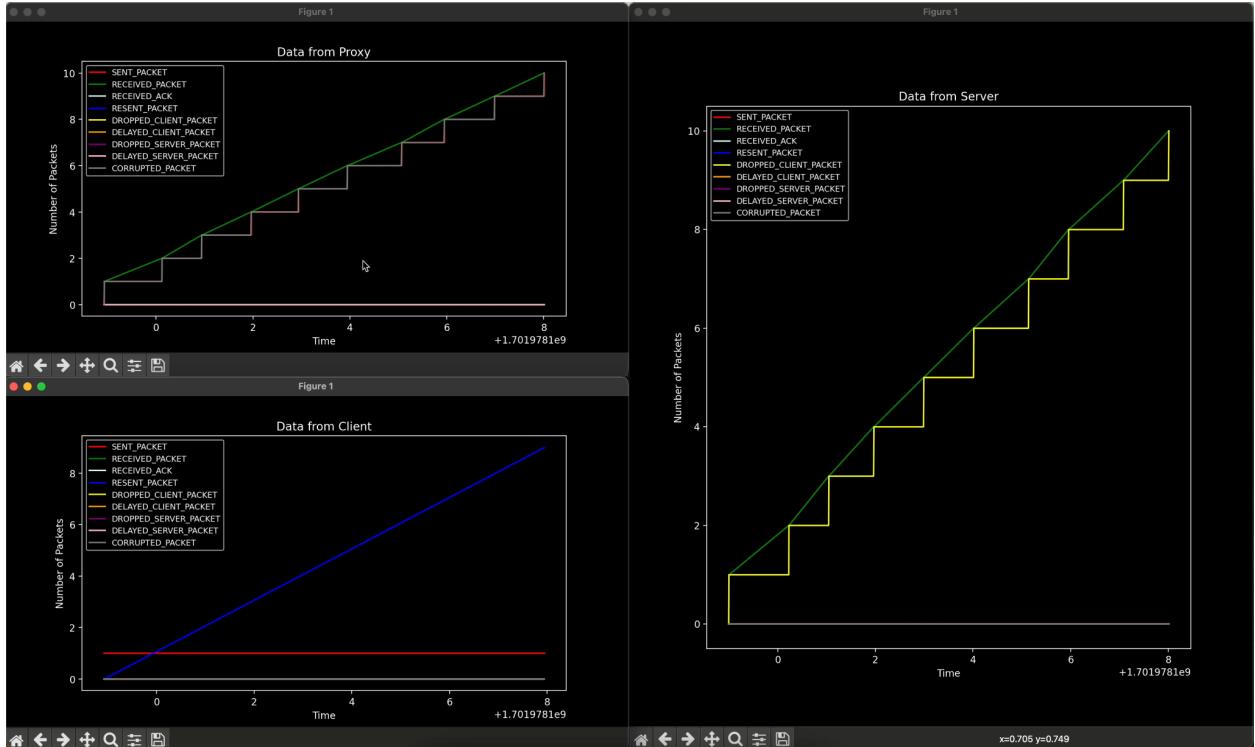

Example 46

```

Client packet with seq number: 1 ack number: 101 flags: 6 received
delay: 0 drop 0 corruption: 0
Client packet with seq number: 1 ack number: 101 flags: 6 sent
Server packet with seq number: 101 ack number: 16 flags: 2 received
delay: 0 drop 0 corruption: 0
Server packet with seq number: 101 ack number: 16 flags: 2 sent

```

```

hello message 1
Client packet with SEQ number: 1 sent

Enter string below [ctrl + d] to quit
Server packet with ack number: 16 flags: 2 received
received ack
removing packet with expected ack number: 16 at index: 2

```

```

RECEIVED:
seq number: 1 data: hello message 1

expected: 1 got: 1
SENDING:
ack number: 16
expected: 16

```

Example 47

```
└─ cat client_received_data.csv
100,1,3,0,33967,
101,64,2,0,28024,
101,192,2,0,28024,
101,192,2,0,28024,
101,203,2,0,28024,
101,218,2,0,28024,
101,218,2,0,28024,
101,225,2,0,28024,
101,225,2,0,28024,
101,232,2,0,28024,
101,239,2,0,28024,
101,246,2,0,28024,
101,260,2,0,28024,
101,265,2,0,28024,
101,270,2,0,28024,
101,274,2,0,28024,
101,285,2,0,28024,
101,285,2,0,28024,
101,290,2,0,28024,
101,298,2,0,28024,
101,298,2,0,28024,
101,298,2,0,28024,
101,298,2,0,28024,
101,298,2,0,28024,
101,298,2,0,28024,
285,101,6,5,2480,rggr
101,290,2,0,28024,
290,101,6,5,11970,erwrew3
285,101,6,5,2480,rggr
101,290,2,0,28024,
101,290,2,0,28024,
290,101,6,5,11970,erwrew3
101,290,2,0,28024,
290,101,6,5,11970,erwrew3
101,298,2,0,28024,
101,298,2,0,28024,
101,298,2,0,28024,
101,298,2,0,28024,
```

```
285,101,6,5,2480,rggr
285,101,6,5,2480,rggr
285,101,6,5,2480,rggr
285,101,6,5,2480,rggr
290,101,6,5,11970,erwrew3
290,101,6,5,11970,erwrew3
290,101,6,5,11970,erwrew3
290,101,6,5,11970,erwrew3

└─ [?] ~/C/reliable-udp/s/server ── cat server_sent_data.csv
```

Example 48

```
Server packet with ack number: 285 flags: 2 received
received ack
removing packet with expected ack number: 279 at index: 2
removing packet with expected ack number: 285 at index: 3
```

Example 49

