R1

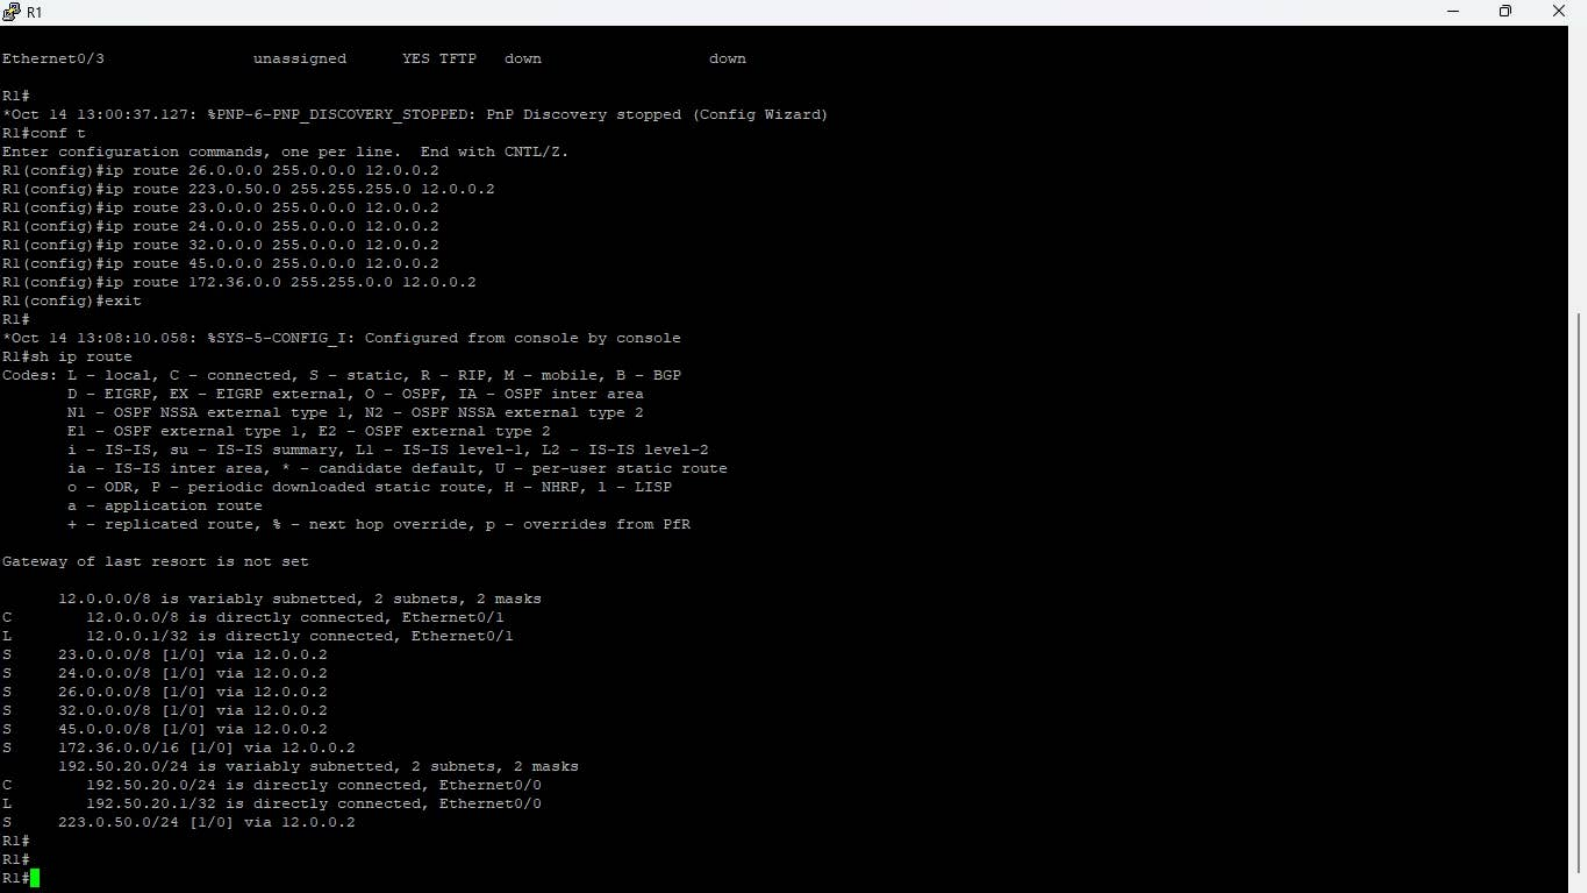
```
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#int e 0/0
R1(config-if)#ip add 192.50.20.1 255.255.255.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#int e 0/1
R1(config-if)#ip add 12.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#exit
R1#
*Oct 14 12:58:26.509: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip int br
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                192.50.20.1     YES manual up                    up

Ethernet0/1                12.0.0.1        YES manual up                    up

Ethernet0/2                unassigned      YES TFTP   down                  down

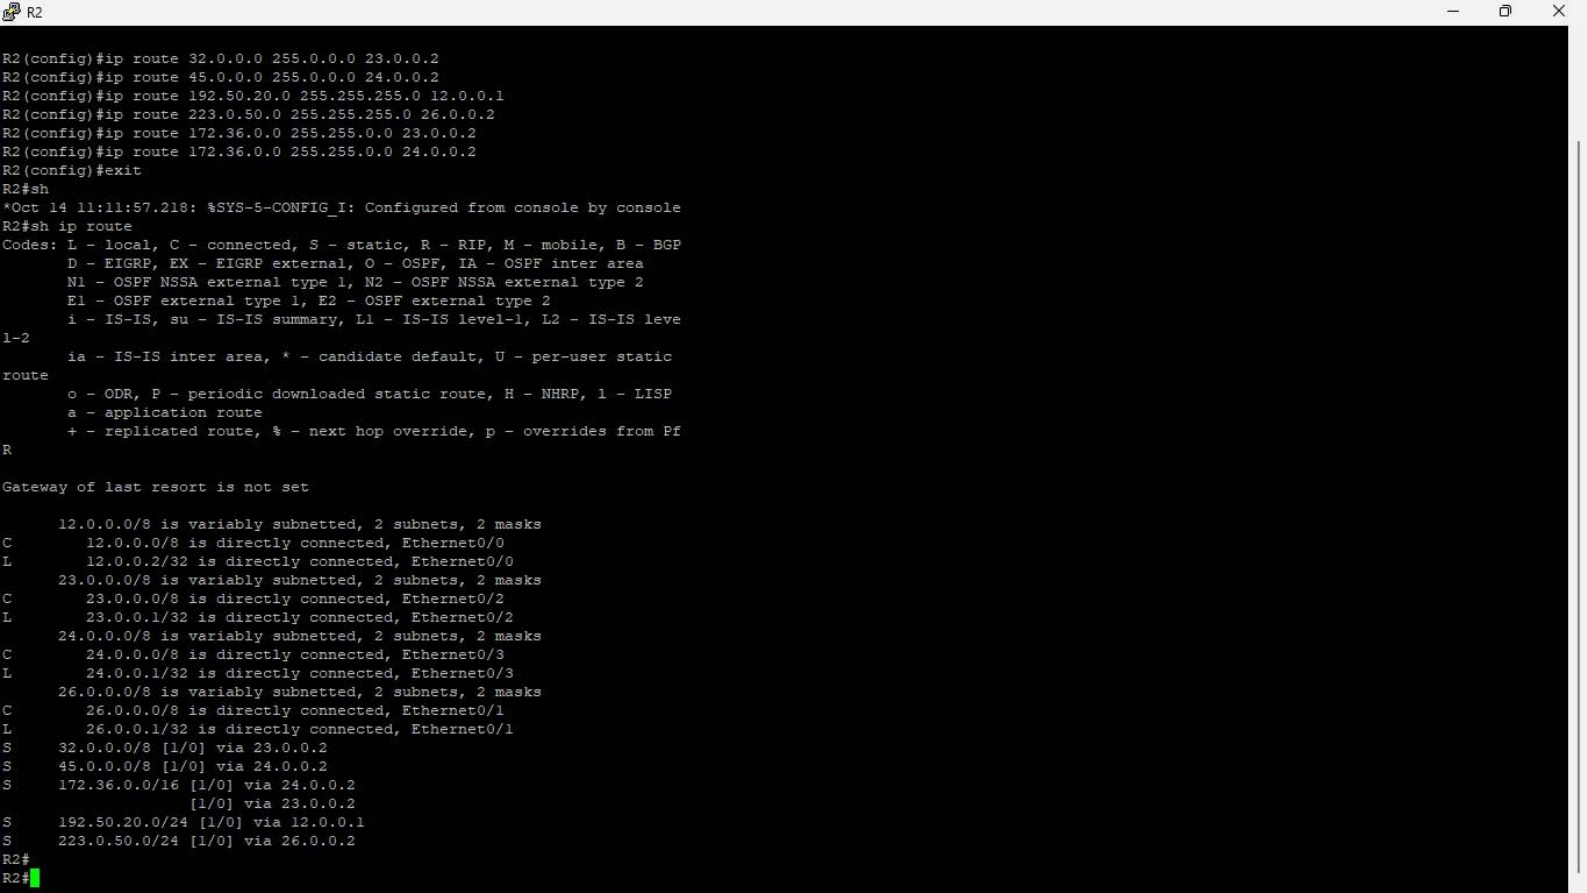
Ethernet0/3                unassigned      YES TFTP   down                  down

R1#
```


R1
Ethernet0/3 unassigned YES TFTP down down
R1#
*Oct 14 13:00:37.127: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#ip route 26.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 223.0.50.0 255.255.255.0 12.0.0.2
R1(config)#ip route 23.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 24.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 32.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 45.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 172.36.0.0 255.255.0.0 12.0.0.2
R1(config)#exit
R1#
*Oct 14 13:08:10.058: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR
Gateway of last resort is not set
12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 12.0.0.0/8 is directly connected, Ethernet0/1
L 12.0.0.1/32 is directly connected, Ethernet0/1
S 23.0.0.0/8 [1/0] via 12.0.0.2
S 24.0.0.0/8 [1/0] via 12.0.0.2
S 26.0.0.0/8 [1/0] via 12.0.0.2
S 32.0.0.0/8 [1/0] via 12.0.0.2
S 45.0.0.0/8 [1/0] via 12.0.0.2
S 172.36.0.0/16 [1/0] via 12.0.0.2
192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.50.20.0/24 is directly connected, Ethernet0/0
L 192.50.20.1/32 is directly connected, Ethernet0/0
S 223.0.50.0/24 [1/0] via 12.0.0.2
R1#
R1#
R1#

R2

```
R2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R2(config)#int e 0/0
R2(config-if)#ip add 12.0.0.2 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#int e 0/1
R2(config-if)#ip add 26.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#int e 0/2
R2(config-if)#ip add 23.0.0.1
*Oct 14 10:33:17.245: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery st
opped (Config Wizard)
R2(config-if)#ip add 23.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#int e 0/3
R2(config-if)#ip add 24.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#exit
R2#sh
*Oct 14 10:34:53.964: %SYS-5-CONFIG_I: Configured from console by co
nsole
R2#sh ip int br
Interface                  IP-Address      OK? Method Status
       Protocol
Ethernet0/0                12.0.0.2        YES manual up
       up
Ethernet0/1                26.0.0.1        YES manual up
       up
Ethernet0/2                23.0.0.1        YES manual up
       up
Ethernet0/3                24.0.0.1        YES manual up
       up
R2#
```


R2
R2(config)#ip route 32.0.0.0 255.0.0.0 23.0.0.2
R2(config)#ip route 45.0.0.0 255.0.0.0 24.0.0.2
R2(config)#ip route 192.50.20.0 255.255.255.0 12.0.0.1
R2(config)#ip route 223.0.50.0 255.255.255.0 26.0.0.2
R2(config)#ip route 172.36.0.0 255.255.0.0 23.0.0.2
R2(config)#ip route 172.36.0.0 255.255.0.0 24.0.0.2
R2(config)#exit
R2#sh
*Oct 14 11:11:57.218: %SYS-5-CONFIG_I: Configured from console by console
R2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS leve
l-2
ia - IS-IS inter area, * - candidate default, U - per-user static
route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from Pf
R
Gateway of last resort is not set
12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 12.0.0.0/8 is directly connected, Ethernet0/0
L 12.0.0.2/32 is directly connected, Ethernet0/0
23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 23.0.0.0/8 is directly connected, Ethernet0/2
L 23.0.0.1/32 is directly connected, Ethernet0/2
24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 24.0.0.0/8 is directly connected, Ethernet0/3
L 24.0.0.1/32 is directly connected, Ethernet0/3
26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 26.0.0.0/8 is directly connected, Ethernet0/1
L 26.0.0.1/32 is directly connected, Ethernet0/1
S 32.0.0.0/8 [1/0] via 23.0.0.2
S 45.0.0.0/8 [1/0] via 24.0.0.2
S 172.36.0.0/16 [1/0] via 24.0.0.2
[1/0] via 23.0.0.2
S 192.50.20.0/24 [1/0] via 12.0.0.1
S 223.0.50.0/24 [1/0] via 26.0.0.2
R2#
R2#

R3

```
R3#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R3(config)#int e 0/0
R3(config-if)#ip add 23.0.0.02 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#int e 0/1
R3(config-if)#ip add 32.0.0.1 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#exit
R3#sh
*Oct 14 10:37:25.986: %SYS-5-CONFIG_I: Configured from console by con
sole
R3#sh ip int br
Interface                  IP-Address      OK? Method Status
      Protocol
Ethernet0/0                23.0.0.2        YES manual up
      up
Ethernet0/1                32.0.0.1        YES manual up
      up
Ethernet0/2                unassigned      YES TFTP   down
      down
Ethernet0/3                unassigned      YES TFTP   down
      down
R3#
*Oct 14 10:40:03.088: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery sto
pped (Config Wizard)
R3#
```

```
% Invalid input detected at '^' marker.

R3(config)#ip route 12.0.0.0 255.0.0.0 23.0.0.1
R3(config)#ip route 192.50.20.0 255.255.255.0 23.0.0.1
R3(config)#ip route 26.0.0.0 255.0.0.0 23.0.0.1
R3(config)#ip route 223.0.50.0 255.255.255.0 23.0.0.1
R3(config)#ip route 24.0.0.0 255.0.0.0 23.0.0.1
R3(config)#ip route 45.0.0.0 255.0.0.0 32.0.0.2
R3(config)#ip route 172.36.0.0 255.255.0.0 32.0.0.2
R3(config)#exit
R3#
*Oct 14 11:19:36.562: %SYS-5-CONFIG_I: Configured from console by con
sole
R3#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B -
 BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS
level-2
       ia - IS-IS inter area, * - candidate default, U - per-user sta
tic route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - L
ISP
       a - application route
       + - replicated route, % - next hop override, p - overrides fro
m PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 23.0.0.1
      23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        23.0.0.0/8 is directly connected, Ethernet0/0
L        23.0.0.2/32 is directly connected, Ethernet0/0
S     24.0.0.0/8 [1/0] via 23.0.0.1
S     26.0.0.0/8 [1/0] via 23.0.0.1
      32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        32.0.0.0/8 is directly connected, Ethernet0/1
L        32.0.0.1/32 is directly connected, Ethernet0/1
S     45.0.0.0/8 [1/0] via 32.0.0.2
S     172.36.0.0/16 [1/0] via 32.0.0.2
S     192.50.20.0/24 [1/0] via 23.0.0.1
S     223.0.50.0/24 [1/0] via 23.0.0.1
R3#
```

R4

```
R4#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R4(config)#int e 0/0
R4(config-if)#ip add 24.0.0.2 255.0.0.0
R4(config-if)#no sh
R4(config-if)#exit
R4(config)#int e 0/1
R4(config-if)#ip add 45.0.0.1 255.0.0.0
R4(config-if)#no sh
R4(config-if)#exit
R4(config)#exit
R4#sh
*Oct 14 10:39:21.449: %SYS-5-CONFIG_I: Configured from console by c
onsole
R4#sh ip int br
Interface                  IP-Address      OK? Method Status
        Protocol
Ethernet0/0                24.0.0.2        YES manual up
        up
Ethernet0/1                45.0.0.1        YES manual up
        up
Ethernet0/2                unassigned      YES TFTP   down
        down
Ethernet0/3                unassigned      YES TFTP   down
        down
R4#
*Oct 14 10:40:17.553: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery s
topped (Config Wizard)
R4#
```

R4

```
R4#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R4(config)#ip route 12.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 192.50.20.0 255.255.255.0 24.0.0.1
R4(config)#ip route 12.0.0.0 255.0.0.0 24.0.0.1
R4(config)#no ip route 12.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 12.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 26.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 223.0.50.0 255.255.255.0 24.0.0.1
R4(config)#ip route 23.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 32.0.0.0 255.0.0.0 45.0.0.2
R4(config)#ip route 172.36.0.0 255.255.0.0 45.0.0.2
R4(config)#exit
R4#s
*Oct 14 11:25:45.518: %SYS-5-CONFIG_I: Configured from console by console
R4#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level
-2
       ia - IS-IS inter area, * - candidate default, U - per-user static r
oute
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 24.0.0.1
S     23.0.0.0/8 [1/0] via 24.0.0.1
      24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        24.0.0.0/8 is directly connected, Ethernet0/0
L        24.0.0.2/32 is directly connected, Ethernet0/0
S     26.0.0.0/8 [1/0] via 24.0.0.1
S     32.0.0.0/8 [1/0] via 45.0.0.2
      45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        45.0.0.0/8 is directly connected, Ethernet0/1
L        45.0.0.1/32 is directly connected, Ethernet0/1
S     172.36.0.0/16 [1/0] via 45.0.0.2
S     192.50.20.0/24 [1/0] via 24.0.0.1
S     223.0.50.0/24 [1/0] via 24.0.0.1
R4#
```

R5

```
R5#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R5(config)#int e 0/0
R5(config-if)#ip add 172.36.0.1 255.255.0.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#i
*Oct 14 10:40:24.018: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery st
opped (Config Wizard)
R5(config)#int e 0/1
R5(config-if)#ip add  32.0.0.2  255.0.0.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#int e 0/2
R5(config-if)#ip add 45.0.0.2 255.0.0.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#exit
R5#
*Oct 14 10:41:33.835: %SYS-5-CONFIG_I: Configured from console by co
nsole
R5#sh ip int br
Interface                  IP-Address      OK? Method Status
       Protocol
Ethernet0/0                172.36.0.1      YES manual up
       up
Ethernet0/1                32.0.0.2        YES manual up
       up
Ethernet0/2                45.0.0.2        YES manual up
       up
Ethernet0/3                unassigned      YES TFTP   down
       down
R5#
```

R5

```
Enter configuration commands, one per line.  End with CNTL/Z.
R5(config)#ip route 23.0.0.0 255.0.0.0 32.0.0.1
R5(config)#ip route 12.0.0.0 255.0.0.0 32.0.0.1
R5(config)#ip route 12.0.0.0 255.0.0.0 45.0.0.1
R5(config)#ip route 192.50.20.0 255.255.255.0 32.0.0.1
R5(config)#ip route 192.50.20.0 255.255.255.0 45.0.0.1
R5(config)#ip route 26.0.0.0 255.0.0.0 32.0.0.1
R5(config)#ip route 26.0.0.0 255.0.0.0 45.0.0.1
R5(config)#ip route 223.0.50.0 255.255.255.0 32.0.0.1
R5(config)#ip route 223.0.50.0 255.255.255.0 45.0.0.1
R5(config)#ip route 24.0.0.0 255.0.0.0 45.0.0.1
R5(config)#exit
R5#
*Oct 14 11:54:19.078: %SYS-5-CONFIG_I: Configured from console by console
R5#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 45.0.0.1
                 [1/0] via 32.0.0.1
S     23.0.0.0/8 [1/0] via 32.0.0.1
S     24.0.0.0/8 [1/0] via 45.0.0.1
S     26.0.0.0/8 [1/0] via 45.0.0.1
                 [1/0] via 32.0.0.1
      32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        32.0.0.0/8 is directly connected, Ethernet0/1
L        32.0.0.2/32 is directly connected, Ethernet0/1
      45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        45.0.0.0/8 is directly connected, Ethernet0/2
L        45.0.0.2/32 is directly connected, Ethernet0/2
      172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
C        172.36.0.0/16 is directly connected, Ethernet0/0
L        172.36.0.1/32 is directly connected, Ethernet0/0
S     192.50.20.0/24 [1/0] via 45.0.0.1
                     [1/0] via 32.0.0.1
S     223.0.50.0/24 [1/0] via 45.0.0.1
                    [1/0] via 32.0.0.1
```

R6

```
R6#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R6(config)#int e 0/0
R6(config-if)#ip add 223.0.50.1 255.0.0.0
R6(config-if)#no sh
R6(config-if)#exit
R6(config)#int e 0/1
R6(config-if)#ip add 26.0.0.2 255.0.0.0
R6(config-if)#no sh
R6(config-if)#exit
R6(config)#exit
R6#sh
*Oct 14 10:43:52.893: %SYS-5-CONFIG_I: Configured from console by cons
ole
R6#sh ip iint br
          ^
% Invalid input detected at '^' marker.

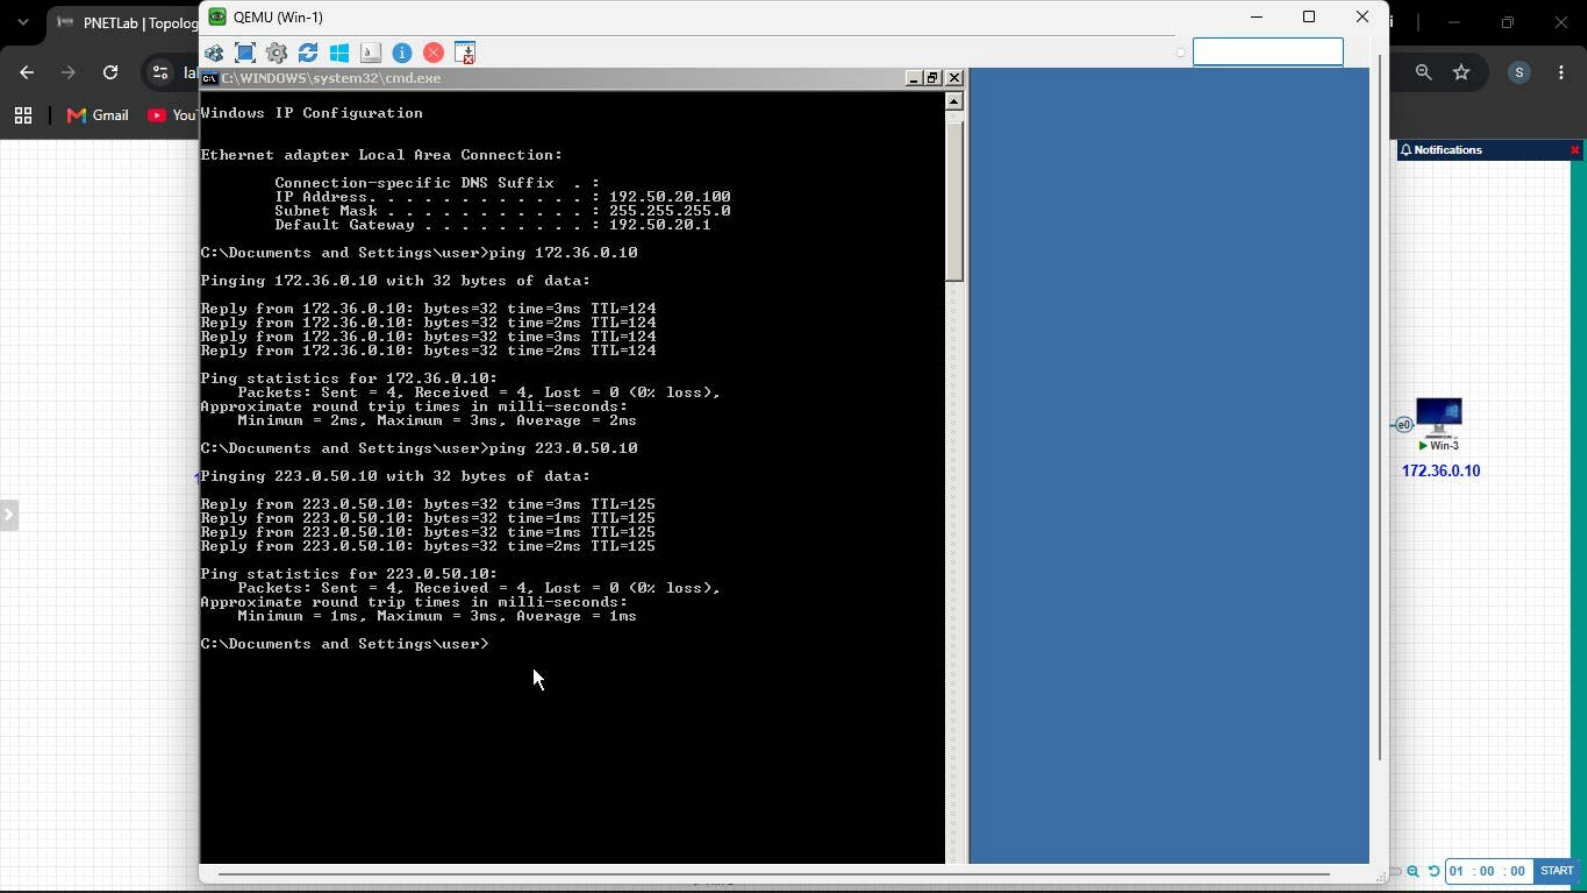
R6#sh ip int br
Interface                  IP-Address      OK? Method Status
      Protocol
Ethernet0/0                223.0.50.1      YES manual up
      up
Ethernet0/1                26.0.0.2        YES manual up
      up
Ethernet0/2                unassigned      YES TFTP   down
      down
Ethernet0/3                unassigned      YES TFTP   down
      down
R6#
*Oct 14 10:46:10.091: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stop
ped (Config Wizard)
R6#
```

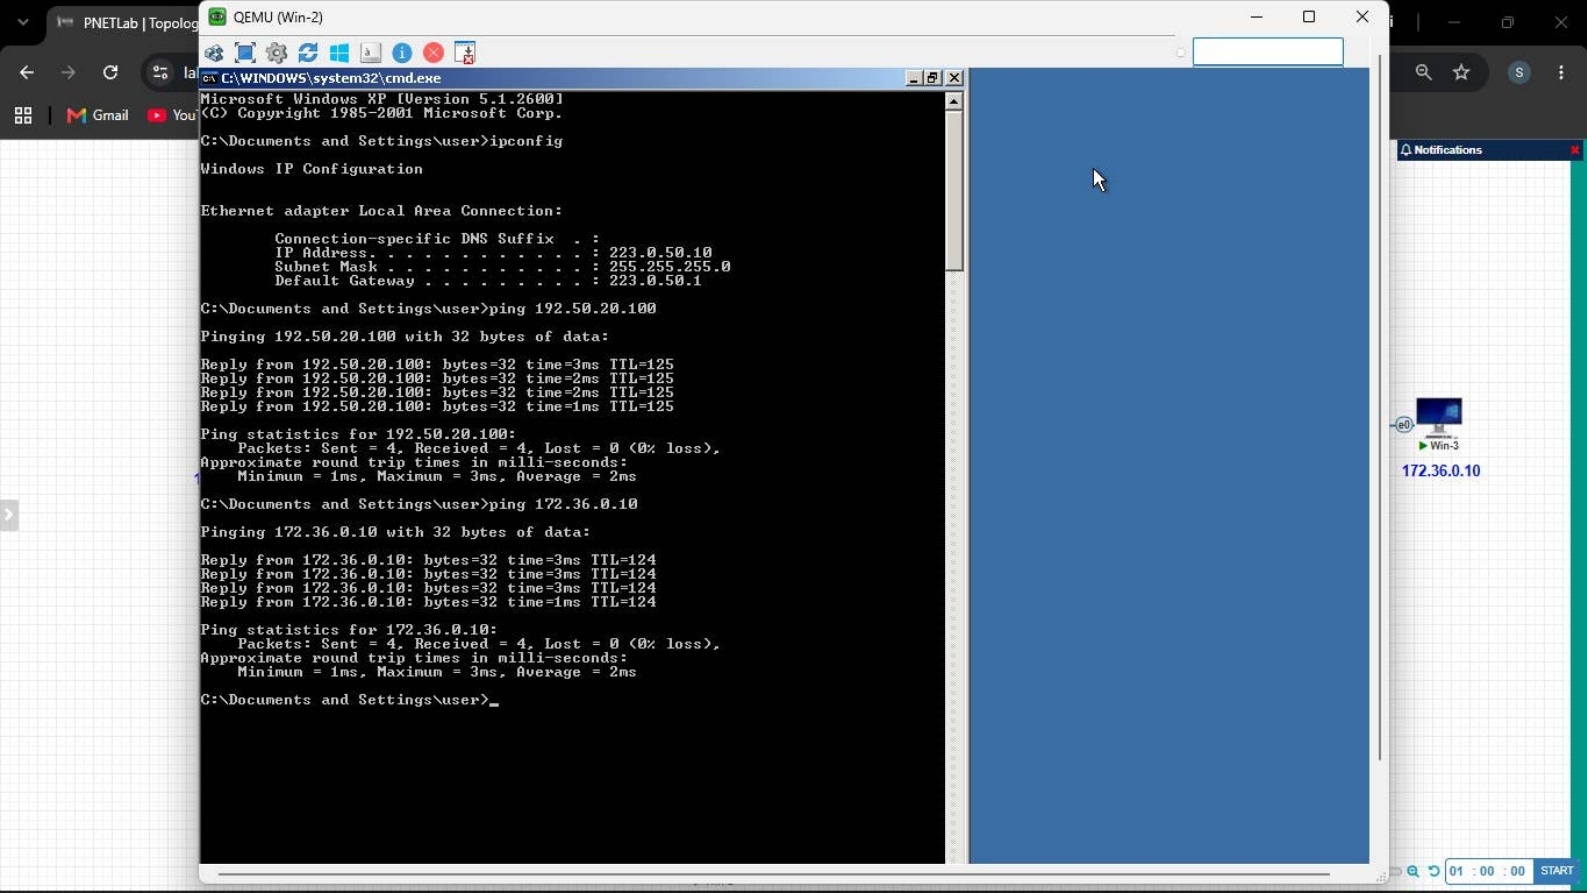
R6

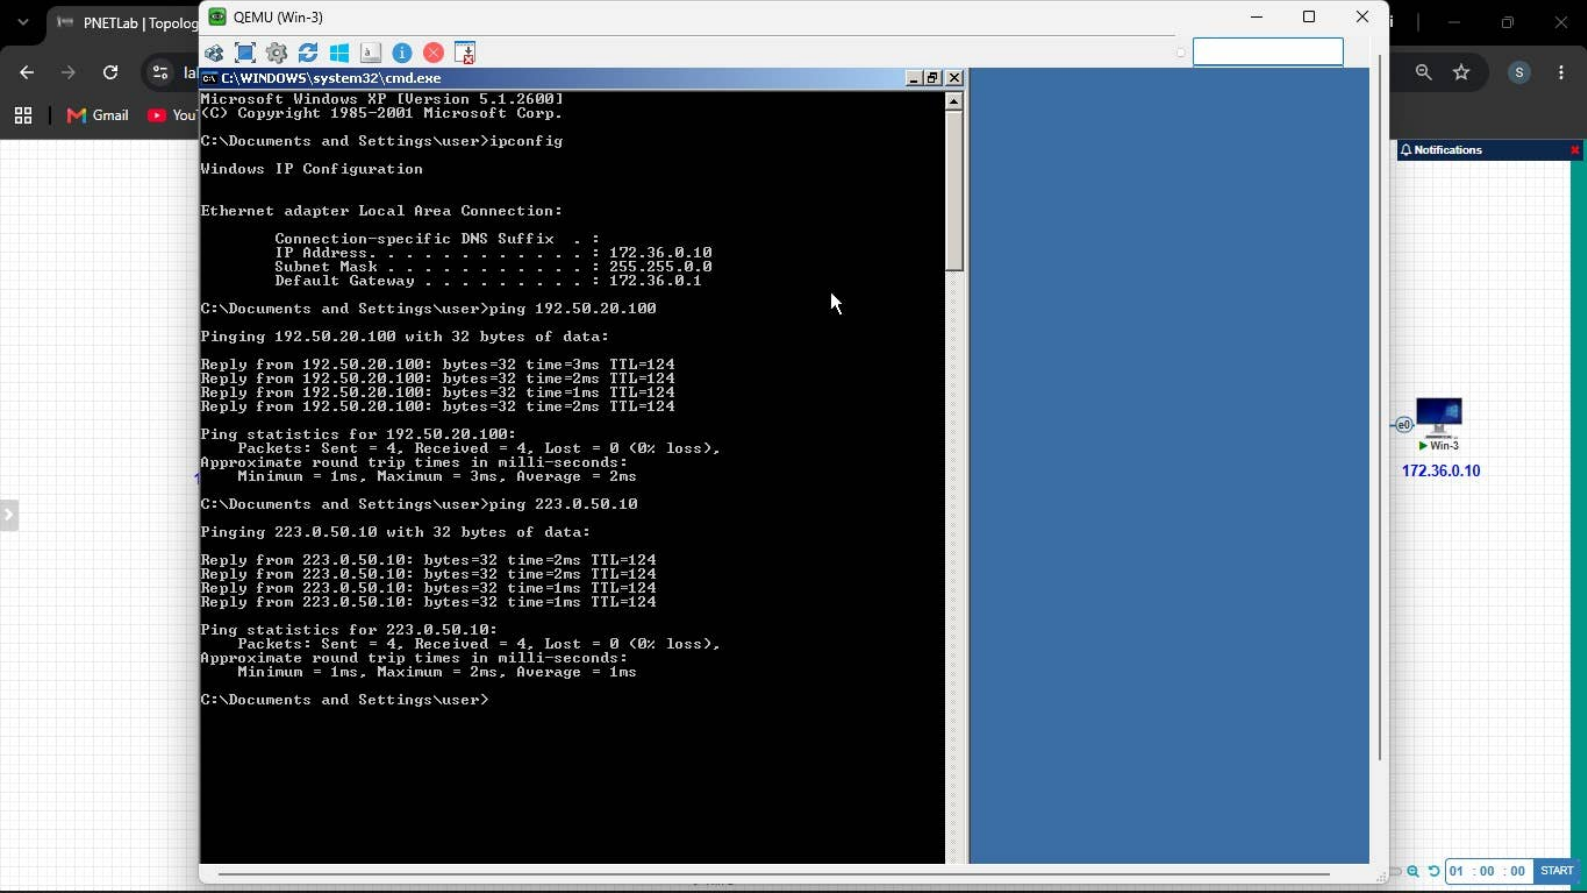
```
R6#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R6(config)#ip route 12.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 192.50.20.0 255.255.255.0 26.0.0.1
R6(config)#ip route 23.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 24.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 32.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 45.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 172.36.0.0 255.255.0.0 26.0.0.1
R6(config)#exit
R6#
*Oct 14 12:03:56.283: %SYS-5-CONFIG_I: Configured from console by console
R6#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-
2
       ia - IS-IS inter area, * - candidate default, U - per-user static ro
ute
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 26.0.0.1
S     23.0.0.0/8 [1/0] via 26.0.0.1
S     24.0.0.0/8 [1/0] via 26.0.0.1
      26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        26.0.0.0/8 is directly connected, Ethernet0/1
L        26.0.0.2/32 is directly connected, Ethernet0/1
S     32.0.0.0/8 [1/0] via 26.0.0.1
S     45.0.0.0/8 [1/0] via 26.0.0.1
S     172.36.0.0/16 [1/0] via 26.0.0.1
S     192.50.20.0/24 [1/0] via 26.0.0.1
C     223.0.0.0/8 is directly connected, Ethernet0/0
      223.0.50.0/32 is subnetted, 1 subnets
L        223.0.50.1 is directly connected, Ethernet0/0
R6#
```


QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 192.50.20.100
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.50.20.1
C:\Documents and Settings\user>ping 172.36.0.10
Pinging 172.36.0.10 with 32 bytes of data:
Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Ping statistics for 172.36.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>ping 223.0.50.10
Pinging 223.0.50.10 with 32 bytes of data:
Reply from 223.0.50.10: bytes=32 time=3ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=2ms TTL=125
Ping statistics for 223.0.50.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 1ms
C:\Documents and Settings\user>
Notifications
Win-3
172.36.0.10
START


QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 223.0.50.10
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 223.0.50.1
C:\Documents and Settings\user>ping 192.50.20.100
Pinging 192.50.20.100 with 32 bytes of data:
Reply from 192.50.20.100: bytes=32 time=3ms TTL=125
Reply from 192.50.20.100: bytes=32 time=2ms TTL=125
Reply from 192.50.20.100: bytes=32 time=2ms TTL=125
Reply from 192.50.20.100: bytes=32 time=1ms TTL=125
Ping statistics for 192.50.20.100:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>ping 172.36.0.10
Pinging 172.36.0.10 with 32 bytes of data:
Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=1ms TTL=124
Ping statistics for 172.36.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>
Notifications
Win-3
172.36.0.10
START


QEMU (Win-3)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 172.36.0.10
Subnet Mask . . . . . : 255.255.0.0
Default Gateway . . . . . : 172.36.0.1
C:\Documents and Settings\user>ping 192.50.20.100
Pinging 192.50.20.100 with 32 bytes of data:
Reply from 192.50.20.100: bytes=32 time=3ms TTL=124
Reply from 192.50.20.100: bytes=32 time=2ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=2ms TTL=124
Ping statistics for 192.50.20.100:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>ping 223.0.50.10
Pinging 223.0.50.10 with 32 bytes of data:
Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Reply from 223.0.50.10: bytes=32 time=1ms TTL=124
Reply from 223.0.50.10: bytes=32 time=1ms TTL=124
Ping statistics for 223.0.50.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>
Notifications
Win-3
172.36.0.10
START