PNETLab | Topology


SANG-54/CCNA

Ask Gemini

labs.surennetwork.com/legacy/topology

Gmail YouTube Adobe Acrobat

SUREN NETWORK
PLAY WITH TECHNOLOGIES

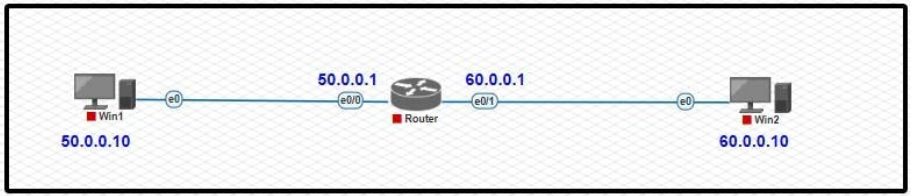

Physical 01 : 00 : 00 START

Router


```
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int
*Oct 15 13:26:36.507: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Confi
g Wizard)
Router(config)#int e 0/0
Router(config-if)#ip add 50.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#exit
Router(config)#int e 0/1
Router(config-if)#ip add 60.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#exit
Router(config)#ex
% Ambiguous command:  "ex"
Router(config)#exit
Router#sh
*Oct 15 13:27:59.421: %SYS-5-CONFIG_I: Configured from console by console
Router#sh ip int br
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                50.0.0.1        YES manual up                    up

Ethernet0/1                60.0.0.1        YES manual up                    up

Ethernet0/2                unassigned      YES TFTP   down                  down

Ethernet0/3                unassigned      YES TFTP   down                  down

Router#
```

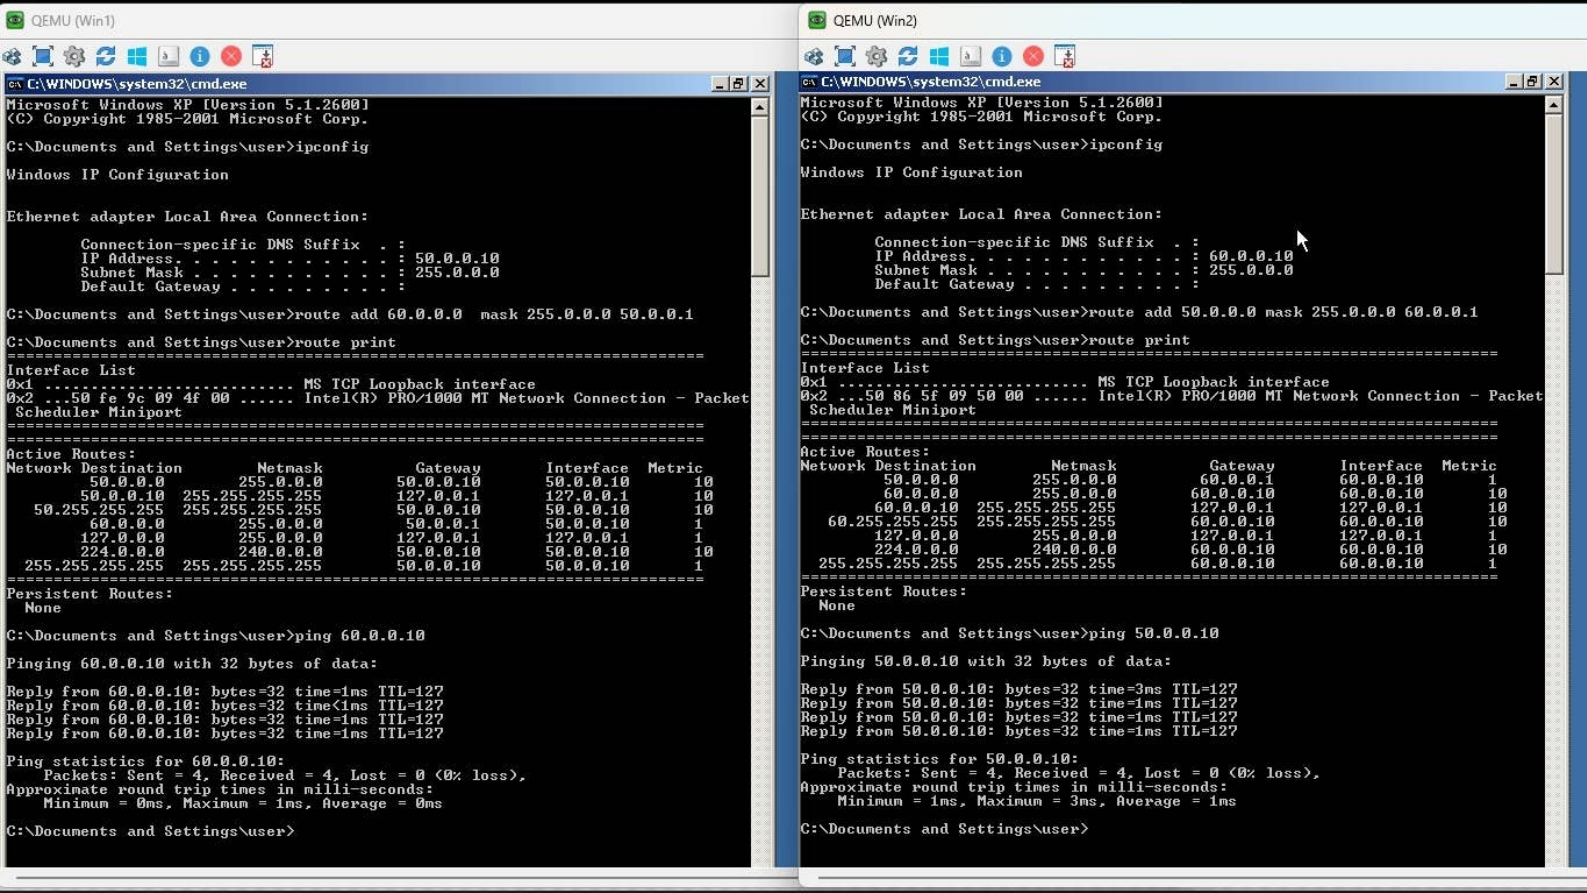
QEMU (Win1)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 50.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . :
C:\Documents and Settings\user>route add 60.0.0.0 mask 255.0.0.0 50.0.0.1
C:\Documents and Settings\user>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 50.0.0.10 50.0.0.10 10
50.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
50.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 10
60.0.0.0 255.0.0.0 50.0.0.1 50.0.0.10 1
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 50.0.0.10 50.0.0.10 10
255.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 1
Persistent Routes:
None
C:\Documents and Settings\user>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time<1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Ping statistics for 60.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\Documents and Settings\user>
QEMU (Win2)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 60.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . :
C:\Documents and Settings\user>route add 50.0.0.0 mask 255.0.0.0 60.0.0.1
C:\Documents and Settings\user>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 86 5f 09 50 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 60.0.0.1 60.0.0.10 1
60.0.0.0 255.0.0.0 60.0.0.10 60.0.0.10 10
60.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
60.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 60.0.0.10 60.0.0.10 10
255.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 1
Persistent Routes:
None
C:\Documents and Settings\user>ping 50.0.0.10
Pinging 50.0.0.10 with 32 bytes of data:
Reply from 50.0.0.10: bytes=32 time=3ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Ping statistics for 50.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 1ms
C:\Documents and Settings\user>