R1

```
R1#sh ip int br
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                10.0.0.1        YES manual up                    up

Ethernet0/1                20.0.0.1        YES manual up                    up

Ethernet0/2                unassigned      YES TFTP   down                  down

Ethernet0/3                unassigned      YES TFTP   down                  down

R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        10.0.0.0/8 is directly connected, Ethernet0/0
L        10.0.0.1/32 is directly connected, Ethernet0/0
S     15.0.0.0/8 [1/0] via 20.0.0.2
      20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Ethernet0/1
L        20.0.0.1/32 is directly connected, Ethernet0/1
S     21.0.0.0/8 [1/0] via 20.0.0.2
S     30.0.0.0/8 [1/0] via 20.0.0.2
S     162.14.0.0/16 [1/0] via 20.0.0.2
S     172.19.0.0/16 [1/0] via 20.0.0.2
S     198.168.168.0/24 [1/0] via 20.0.0.2
R1#
```

```
R2#sh ip int br
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                20.0.0.2        YES manual up                    up

Ethernet0/1                30.0.0.1        YES manual up                    up

Ethernet0/2                unassigned      YES TFTP   down                  down

Ethernet0/3                unassigned      YES TFTP   down                  down

R2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     10.0.0.0/8 [1/0] via 20.0.0.1
S     15.0.0.0/8 [1/0] via 30.0.0.2
      20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Ethernet0/0
L        20.0.0.2/32 is directly connected, Ethernet0/0
S     21.0.0.0/8 [1/0] via 30.0.0.2
      30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        30.0.0.0/8 is directly connected, Ethernet0/1
L        30.0.0.1/32 is directly connected, Ethernet0/1
S     162.14.0.0/16 [1/0] via 30.0.0.2
 --More--
```

R3

```
R3#sh ip int br
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                30.0.0.2        YES manual up                    up

Ethernet0/1                172.19.0.1      YES manual up                    up

Ethernet0/2                21.0.0.1        YES manual up                    up

Ethernet0/3                unassigned      YES TFTP   down                  down

R3#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     10.0.0.0/8 [1/0] via 30.0.0.1
S     15.0.0.0/8 [1/0] via 172.19.0.2
S     20.0.0.0/8 [1/0] via 30.0.0.1
      21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        21.0.0.0/8 is directly connected, Ethernet0/2
L        21.0.0.1/32 is directly connected, Ethernet0/2
      30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        30.0.0.0/8 is directly connected, Ethernet0/0
L        30.0.0.2/32 is directly connected, Ethernet0/0
S     162.14.0.0/16 [1/0] via 21.0.0.2
      172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
C        172.19.0.0/16 is directly connected, Ethernet0/1
L        172.19.0.1/32 is directly connected, Ethernet0/1
S     192.168.168.0/24 [1/0] via 21.0.0.2
R3#
```

R4

```
R4#sh ip int br
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                15.0.0.1        YES manual up                    up

Ethernet0/1                172.19.0.2      YES manual up                    up

Ethernet0/2                unassigned      YES TFTP   down                  down

Ethernet0/3                unassigned      YES TFTP   down                  down

R4#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     10.0.0.0/8 [1/0] via 172.19.0.1
      15.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        15.0.0.0/8 is directly connected, Ethernet0/0
L        15.0.0.1/32 is directly connected, Ethernet0/0
S     20.0.0.0/8 [1/0] via 172.19.0.1
S     21.0.0.0/8 [1/0] via 172.19.0.1
S     30.0.0.0/8 [1/0] via 172.19.0.1
S     162.14.0.0/16 [1/0] via 172.19.0.1
C     172.0.0.0/8 is directly connected, Ethernet0/1
      172.19.0.0/32 is subnetted, 1 subnets
L        172.19.0.2 is directly connected, Ethernet0/1
S     192.168.168.0/24 [1/0] via 172.19.0.1
R4#
```

R5

```
R5#sh ip int br
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                21.0.0.2        YES manual up                    up

Ethernet0/1                192.168.168.1   YES manual up                    up

Ethernet0/2                unassigned      YES TFTP   down                  down

Ethernet0/3                unassigned      YES TFTP   down                  down

R5#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     10.0.0.0/8 [1/0] via 21.0.0.1
S     15.0.0.0/8 [1/0] via 21.0.0.1
S     20.0.0.0/8 [1/0] via 21.0.0.1
      21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        21.0.0.0/8 is directly connected, Ethernet0/0
L        21.0.0.2/32 is directly connected, Ethernet0/0
S     30.0.0.0/8 [1/0] via 21.0.0.1
S     162.14.0.0/16 [1/0] via 192.168.168.2
S     179.19.0.0/16 [1/0] via 21.0.0.1
      192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
C        192.168.168.0/24 is directly connected, Ethernet0/1
L        192.168.168.1/32 is directly connected, Ethernet0/1
R5#
```

R6

```
R6#sh ip int br
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                162.14.0.1      YES manual up                    up

Ethernet0/1                192.168.168.2   YES manual up                    up

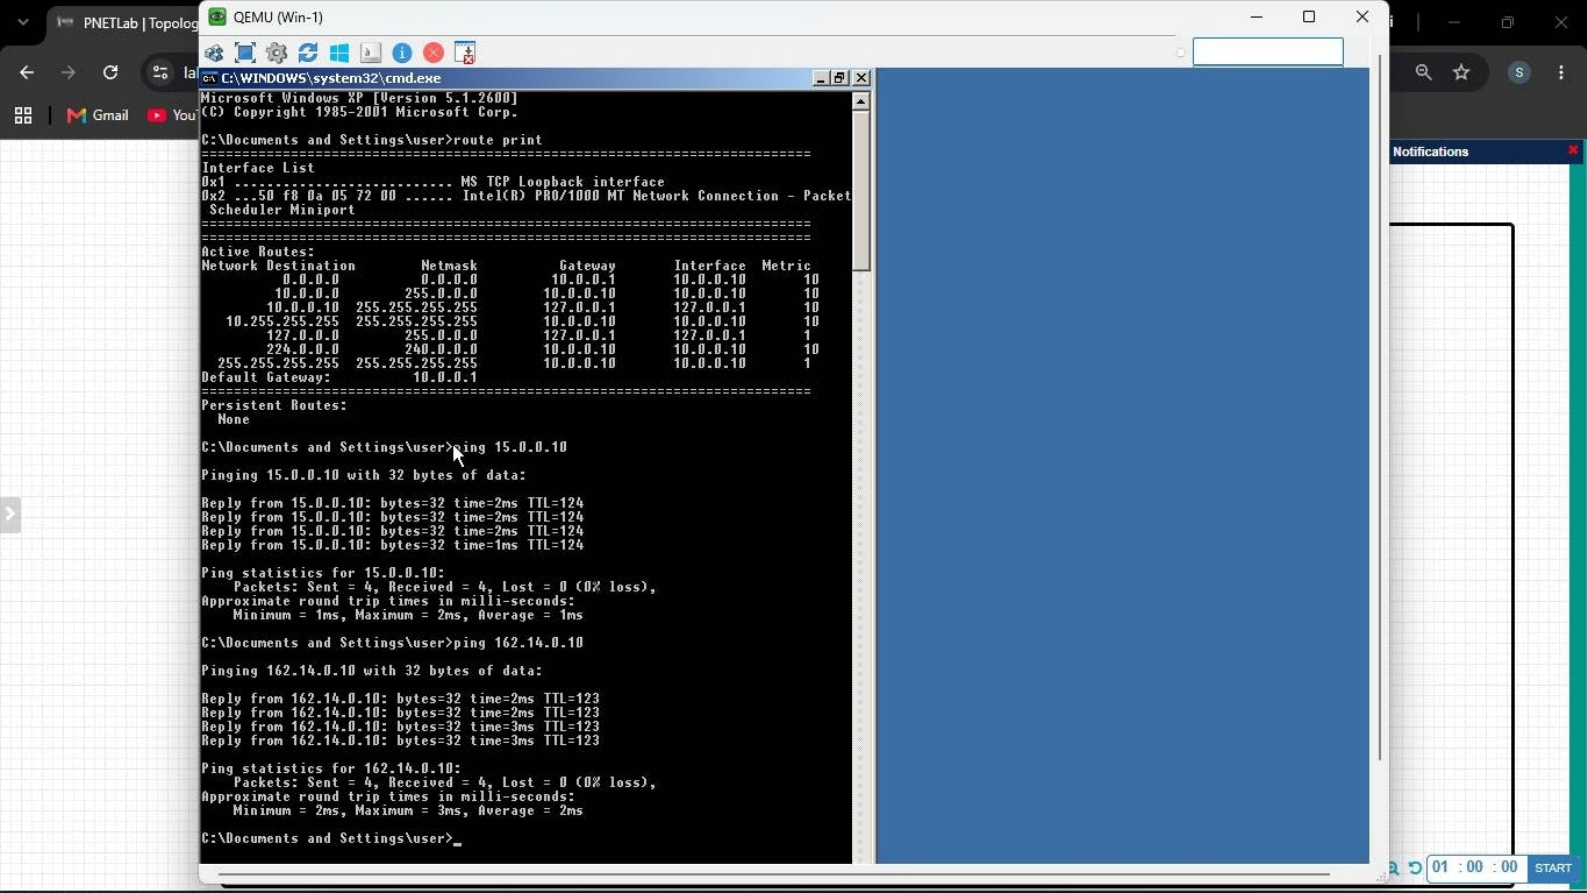
Ethernet0/2                unassigned      YES TFTP   down                  down

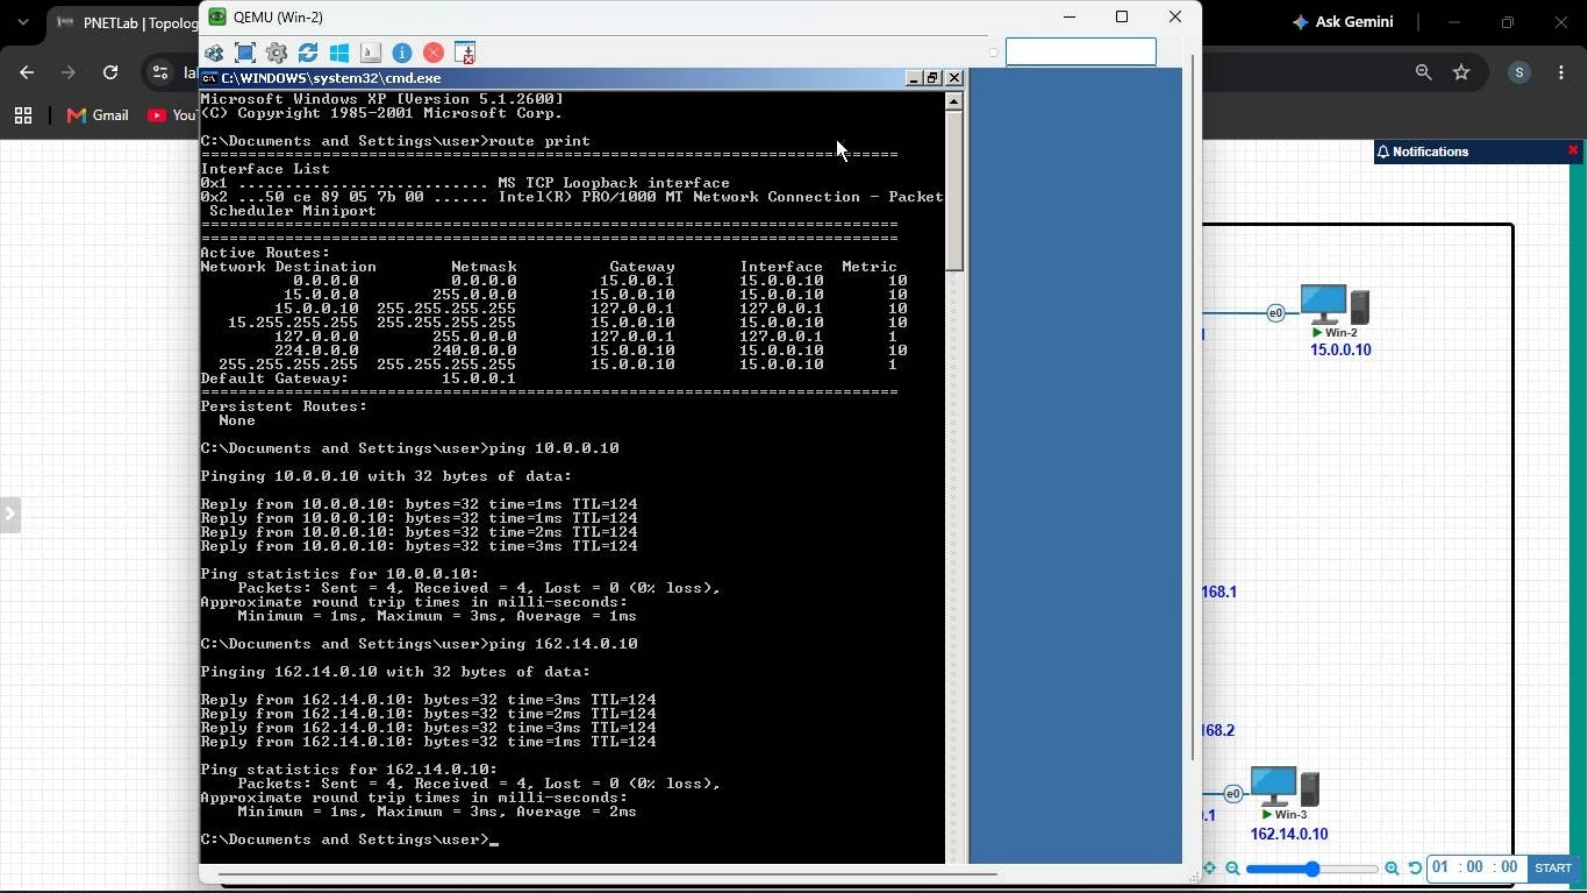
Ethernet0/3                unassigned      YES TFTP   down                  down

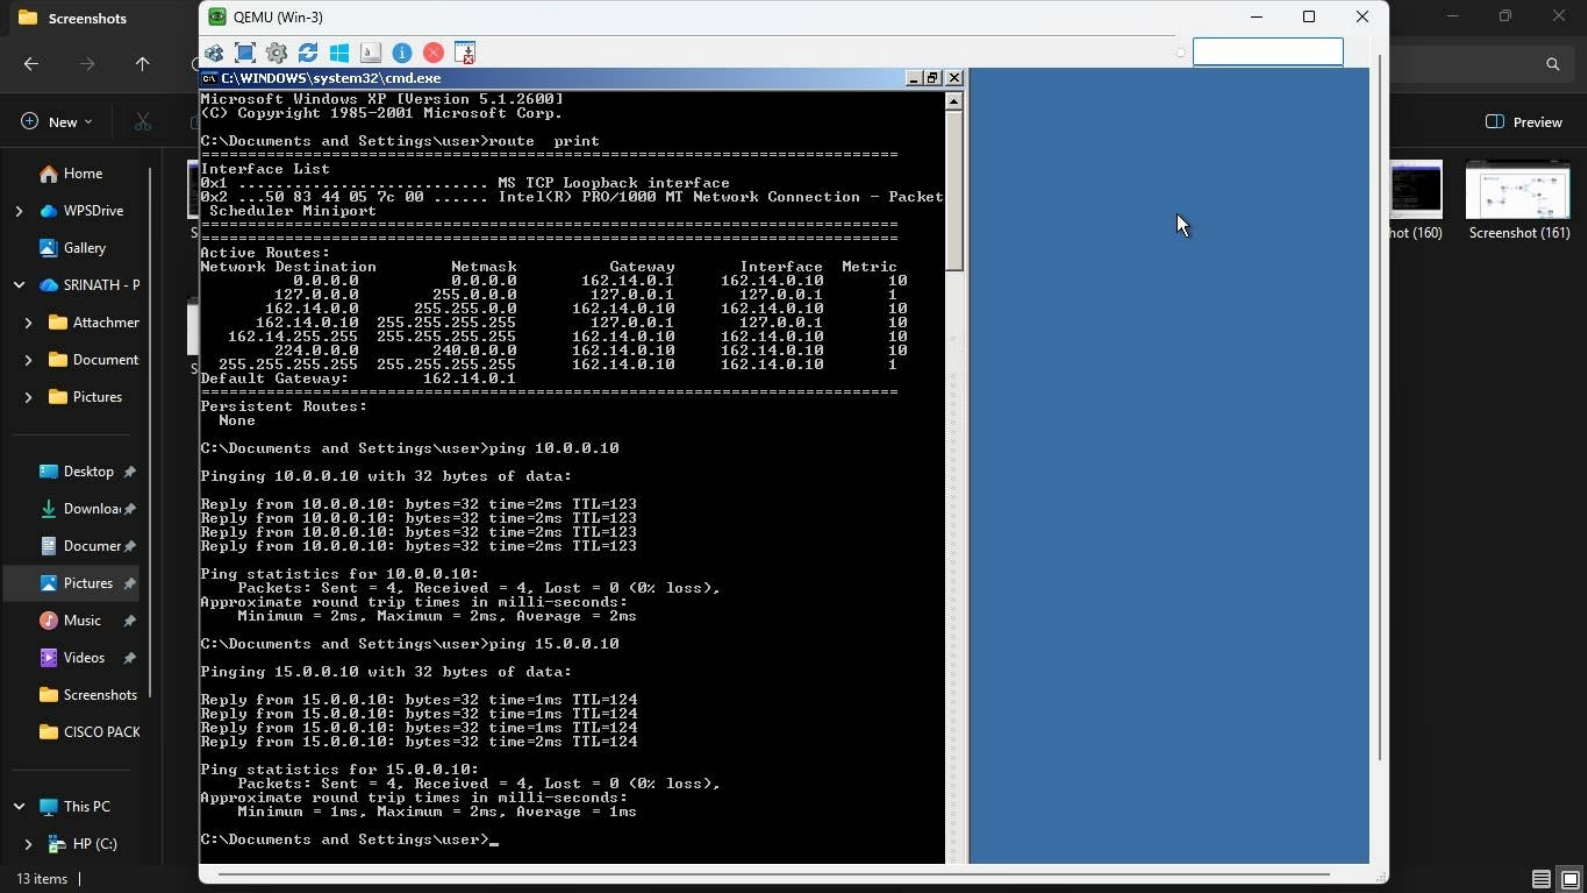
R6#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     10.0.0.0/8 [1/0] via 192.168.168.1
S     15.0.0.0/8 [1/0] via 192.168.168.1
S     20.0.0.0/8 [1/0] via 192.168.168.1
S     21.0.0.0/8 [1/0] via 192.168.168.1
S     30.0.0.0/8 [1/0] via 192.168.168.1
C     162.0.0.0/8 is directly connected, Ethernet0/0
      162.14.0.0/32 is subnetted, 1 subnets
L        162.14.0.1 is directly connected, Ethernet0/0
S     172.19.0.0/16 [1/0] via 192.168.168.1
C     192.0.0.0/8 is directly connected, Ethernet0/1
      192.168.168.0/32 is subnetted, 1 subnets
L        192.168.168.2 is directly connected, Ethernet0/1
R6#
```


QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 f0 0a 05 72 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
0.0.0.0 0.0.0.0 10.0.0.1 10.0.0.10 10
10.0.0.0 255.0.0.0 10.0.0.10 10.0.0.10 10
10.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
10.255.255.255 255.255.255.255 10.0.0.10 10.0.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 10.0.0.10 10.0.0.10 10
255.255.255.255 255.255.255.255 10.0.0.10 10.0.0.10 1
Default Gateway: 10.0.0.1
Persistent Routes:
None
C:\Documents and Settings\user>ping 15.0.0.10
Pinging 15.0.0.10 with 32 bytes of data:
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Ping statistics for 15.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>ping 162.14.0.10
Pinging 162.14.0.10 with 32 bytes of data:
Reply from 162.14.0.10: bytes=32 time=2ms TTL=123
Reply from 162.14.0.10: bytes=32 time=2ms TTL=123
Reply from 162.14.0.10: bytes=32 time=3ms TTL=123
Reply from 162.14.0.10: bytes=32 time=3ms TTL=123
Ping statistics for 162.14.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>
Notifications
01 : 00 : 00
START


QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 ce 89 05 7b 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
0.0.0.0 0.0.0.0 15.0.0.1 15.0.0.10 10
15.0.0.0 255.0.0.0 15.0.0.10 15.0.0.10 10
15.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
15.255.255.255 255.255.255.255 15.0.0.10 15.0.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 15.0.0.10 15.0.0.10 10
255.255.255.255 255.255.255.255 15.0.0.10 15.0.0.10 1
Default Gateway: 15.0.0.1
Persistent Routes:
None
C:\Documents and Settings\user>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:
Reply from 10.0.0.10: bytes=32 time=1ms TTL=124
Reply from 10.0.0.10: bytes=32 time=1ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=3ms TTL=124
Ping statistics for 10.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 1ms
C:\Documents and Settings\user>ping 162.14.0.10
Pinging 162.14.0.10 with 32 bytes of data:
Reply from 162.14.0.10: bytes=32 time=3ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=3ms TTL=124
Reply from 162.14.0.10: bytes=32 time=1ms TTL=124
Ping statistics for 162.14.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>
Ask Gemini
Notifications
Win-2
15.0.0.10
Win-3
162.14.0.10
START


Screenshots
QEMU (Win-3)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 83 44 05 7c 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
0.0.0.0 0.0.0.0 162.14.0.1 162.14.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
162.14.0.0 255.255.0.0 162.14.0.10 162.14.0.10 10
162.14.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
162.14.255.255 255.255.255.255 162.14.0.10 162.14.0.10 10
224.0.0.0 240.0.0.0 162.14.0.10 162.14.0.10 10
255.255.255.255 255.255.255.255 162.14.0.10 162.14.0.10 1
Default Gateway: 162.14.0.1
Persistent Routes:
None
C:\Documents and Settings\user>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Ping statistics for 10.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 2ms, Average = 2ms
C:\Documents and Settings\user>ping 15.0.0.10
Pinging 15.0.0.10 with 32 bytes of data:
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Ping statistics for 15.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>
New
Preview
Home
WPSDrive
Gallery
SRINATH - P
Attachmer
Document
Pictures
Desktop
Downloa
Documer
Pictures
Music
Videos
Screenshots
CISCO PACK
This PC
HP (C:)
Screenshot (160)
Screenshot (161)
13 items