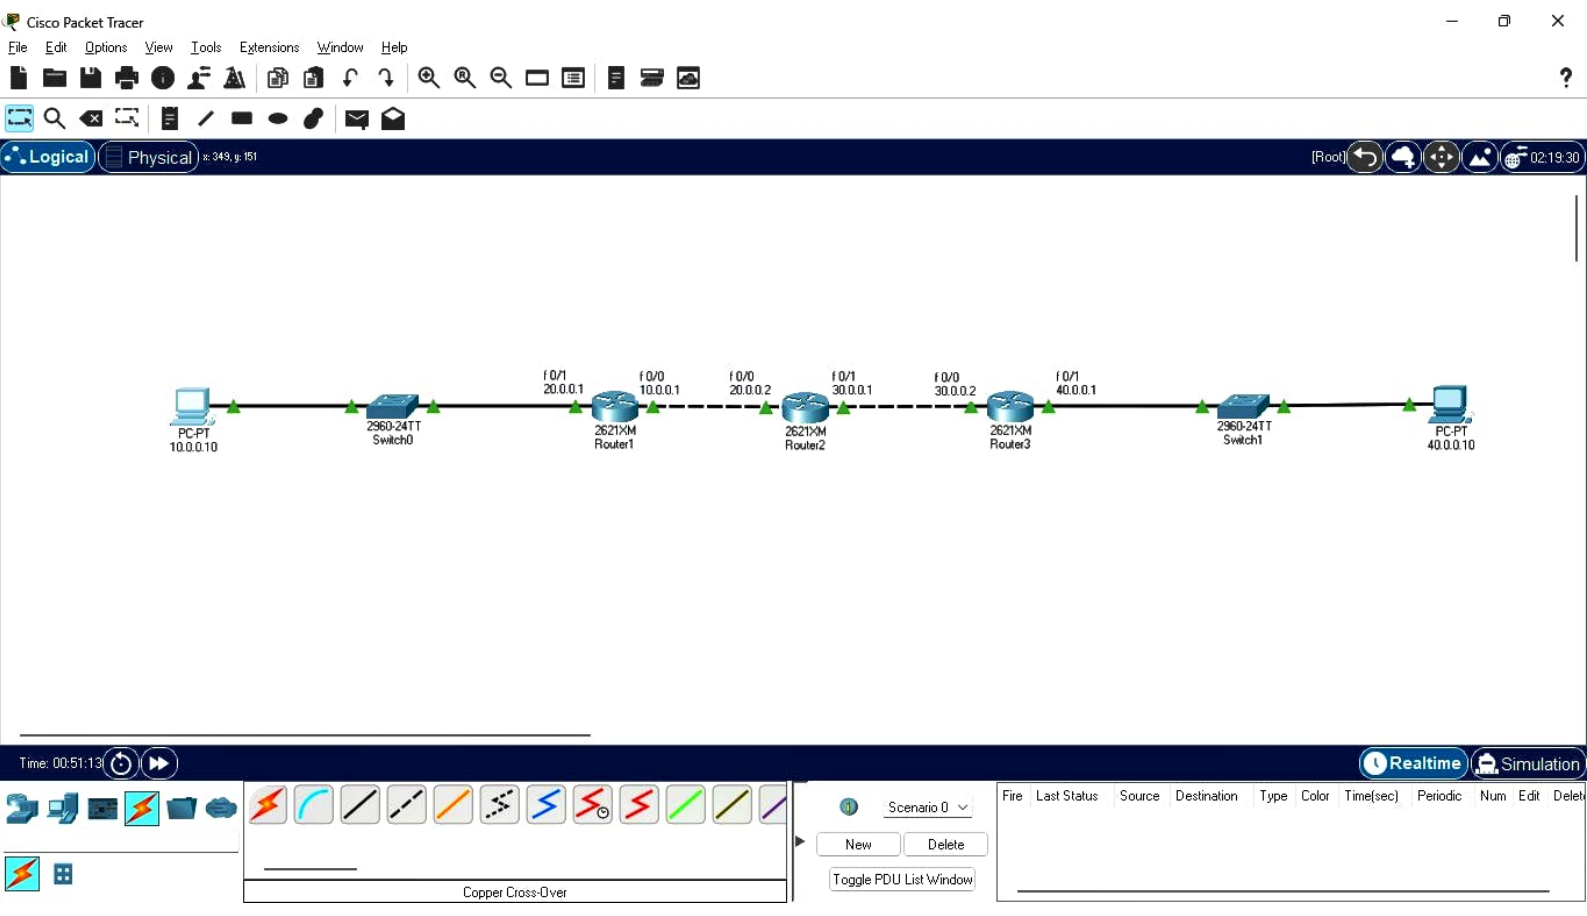
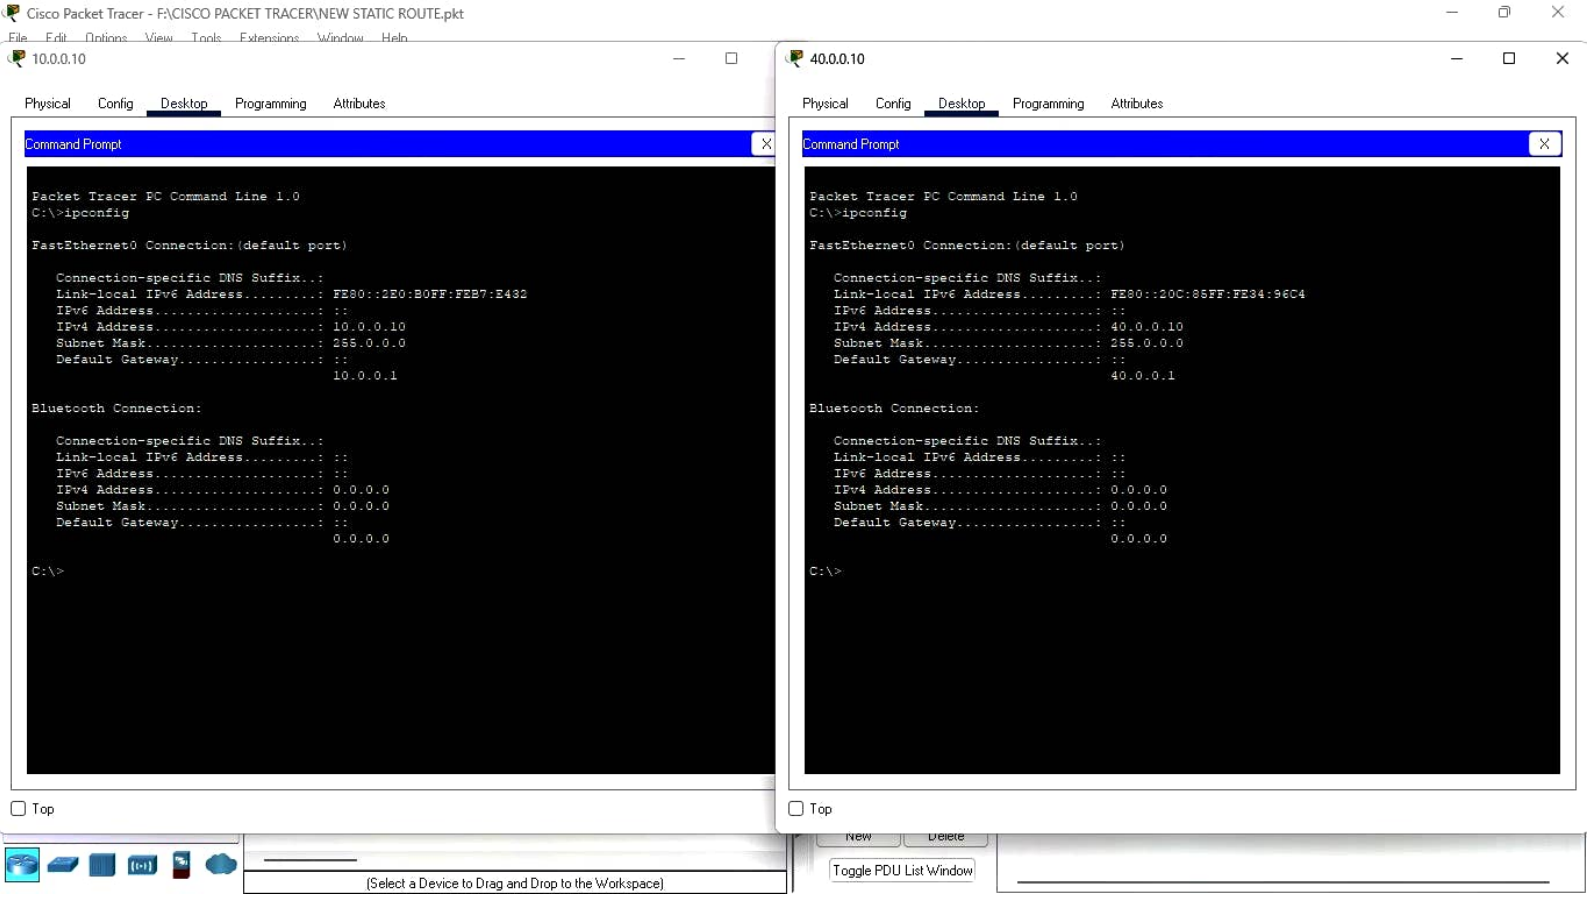
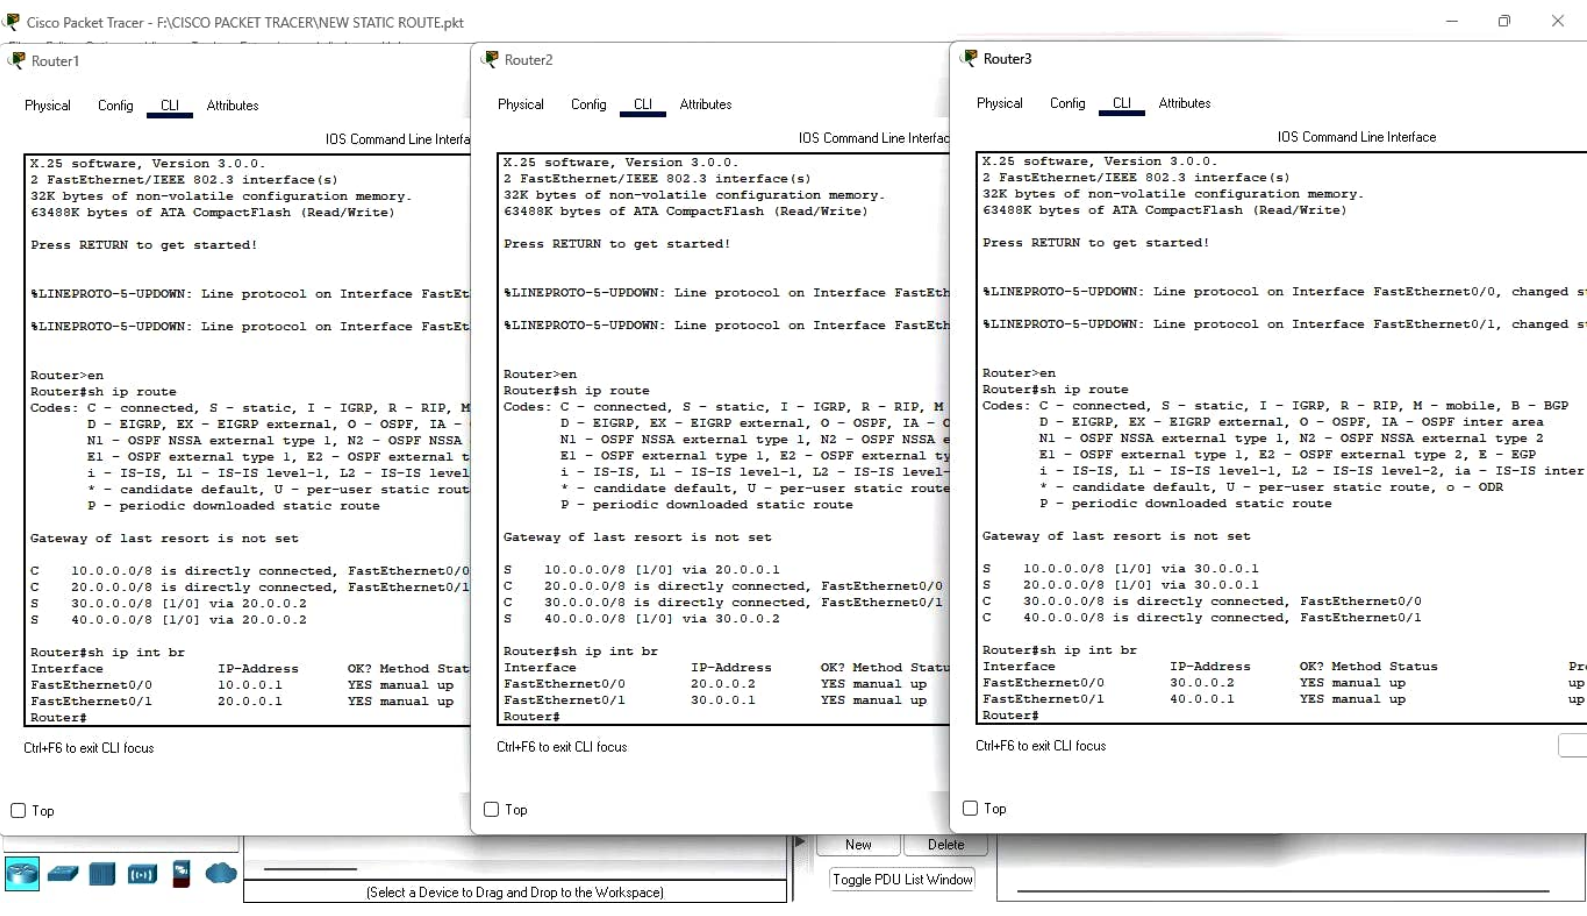
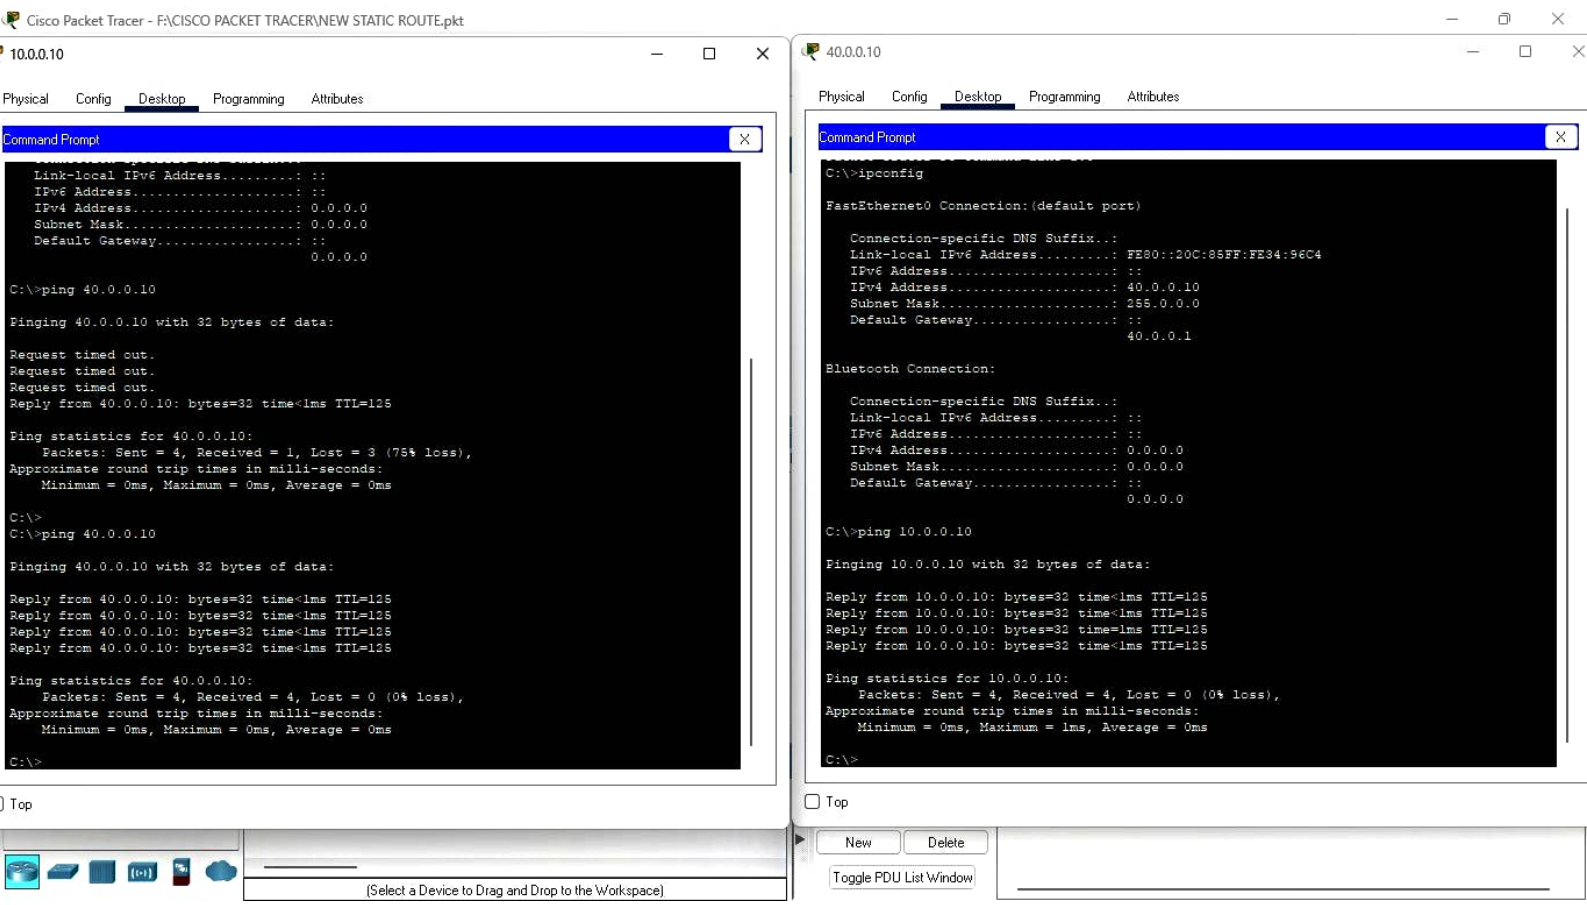

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
[Root]
02:19:30
f 0/1
20.0.0.1
f 0/0
10.0.0.1
f 0/0
20.0.0.2
f 0/1
30.0.0.1
f 0/0
30.0.0.2
f 0/1
40.0.0.1
PC-PT
10.0.0.10
2960-24TT
Switch0
2621XM
Router1
2621XM
Router2
2621XM
Router3
2960-24TT
Switch1
PC-PT
40.0.0.10
Time: 00:51:13
Realtime
Simulation
Copper Cross-Over
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete


Cisco Packet Tracer - F:\CISCO PACKET TRACER\NEW STATIC ROUTE.pkt
File Edit Options View Tools Extensions Window Help
10.0.0.10
Physical Config Desktop Programming Attributes
Command Prompt
Packet Tracer PC Command Line 1.0
C:\>ipconfig
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: FE80::2E0:B0FF:FEB7:E432
IPv6 Address.....: ::
IPv4 Address.....: 10.0.0.10
Subnet Mask.....: 255.0.0.0
Default Gateway.....: ::
10.0.0.1
Bluetooth Connection:
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
C:\>
Top
40.0.0.10
Physical Config Desktop Programming Attributes
Command Prompt
Packet Tracer PC Command Line 1.0
C:\>ipconfig
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: FE80::20C:85FF:FE34:96C4
IPv6 Address.....: ::
IPv4 Address.....: 40.0.0.10
Subnet Mask.....: 255.0.0.0
Default Gateway.....: ::
40.0.0.1
Bluetooth Connection:
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
C:\>
Top
New
Delete
Toggle PDU List Window
(Select a Device to Drag and Drop to the Workspace)


Cisco Packet Tracer - F:\CISCO PACKET TRACER\NEW STATIC ROUTE.pkt
Router1
Physical Config CLI Attributes
IOS Command Line Interfa
X.25 software, Version 3.0.0.
2 FastEthernet/IEEE 802.3 interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)
Press RETURN to get started!
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEt
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEt
Router>en
Router#sh ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M
D - EIGRP, EX - EIGRP external, O - OSPF, IA -
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA
E1 - OSPF external type 1, E2 - OSPF external t
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level
* - candidate default, U - per-user static rout
P - periodic downloaded static route
Gateway of last resort is not set
C 10.0.0.0/8 is directly connected, FastEthernet0/0
C 20.0.0.0/8 is directly connected, FastEthernet0/1
S 30.0.0.0/8 [1/0] via 20.0.0.2
S 40.0.0.0/8 [1/0] via 20.0.0.2
Router#sh ip int br
Interface IP-Address OK? Method Stat
FastEthernet0/0 10.0.0.1 YES manual up
FastEthernet0/1 20.0.0.1 YES manual up
Router#
Ctrl+F6 to exit CLI focus
Top
Router2
Physical Config CLI Attributes
IOS Command Line Interfac
X.25 software, Version 3.0.0.
2 FastEthernet/IEEE 802.3 interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)
Press RETURN to get started!
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEth
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEth
Router>en
Router#sh ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M
D - EIGRP, EX - EIGRP external, O - OSPF, IA -
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA e
E1 - OSPF external type 1, E2 - OSPF external ty
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-
* - candidate default, U - per-user static route
P - periodic downloaded static route
Gateway of last resort is not set
S 10.0.0.0/8 [1/0] via 20.0.0.1
C 20.0.0.0/8 is directly connected, FastEthernet0/0
C 30.0.0.0/8 is directly connected, FastEthernet0/1
S 40.0.0.0/8 [1/0] via 30.0.0.2
Router#sh ip int br
Interface IP-Address OK? Method Statu
FastEthernet0/0 20.0.0.2 YES manual up
FastEthernet0/1 30.0.0.1 YES manual up
Router#
Ctrl+F6 to exit CLI focus
Top
Router3
Physical Config CLI Attributes
IOS Command Line Interface
X.25 software, Version 3.0.0.
2 FastEthernet/IEEE 802.3 interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)
Press RETURN to get started!
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed s
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed s
Router>en
Router#sh ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
S 10.0.0.0/8 [1/0] via 30.0.0.1
S 20.0.0.0/8 [1/0] via 30.0.0.1
C 30.0.0.0/8 is directly connected, FastEthernet0/0
C 40.0.0.0/8 is directly connected, FastEthernet0/1
Router#sh ip int br
Interface IP-Address OK? Method Status Pr
FastEthernet0/0 30.0.0.2 YES manual up up
FastEthernet0/1 40.0.0.1 YES manual up up
Router#
Ctrl+F6 to exit CLI focus
Top
New
Delete
Toggle PDU List Window
(Select a Device to Drag and Drop to the Workspace)


Cisco Packet Tracer - F:\CISCO PACKET TRACER\NEW STATIC ROUTE.pkt
10.0.0.10
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
C:\>ping 40.0.0.10
Pinging 40.0.0.10 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 1, Lost = 3 (75% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
C:\>ping 40.0.0.10
Pinging 40.0.0.10 with 32 bytes of data:
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
40.0.0.10
Physical
Config
Desktop
Programming
Attributes
Command Prompt
C:\>ipconfig
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: FE80::20C:85FF:FE34:96C4
IPv6 Address.....: ::
IPv4 Address.....: 40.0.0.10
Subnet Mask.....: 255.0.0.0
Default Gateway.....: ::
40.0.0.1
Bluetooth Connection:
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
C:\>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:
Reply from 10.0.0.10: bytes=32 time<1ms TTL=125
Reply from 10.0.0.10: bytes=32 time<1ms TTL=125
Reply from 10.0.0.10: bytes=32 time=1ms TTL=125
Reply from 10.0.0.10: bytes=32 time<1ms TTL=125
Ping statistics for 10.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\>
Top
New
Delete
Toggle PDU List Window
(Select a Device to Drag and Drop to the Workspace)