



Solar Box Dryer


Towards Sustainable Future
ZeniteK

For household's



Zenitek.in

+91- 8903852623

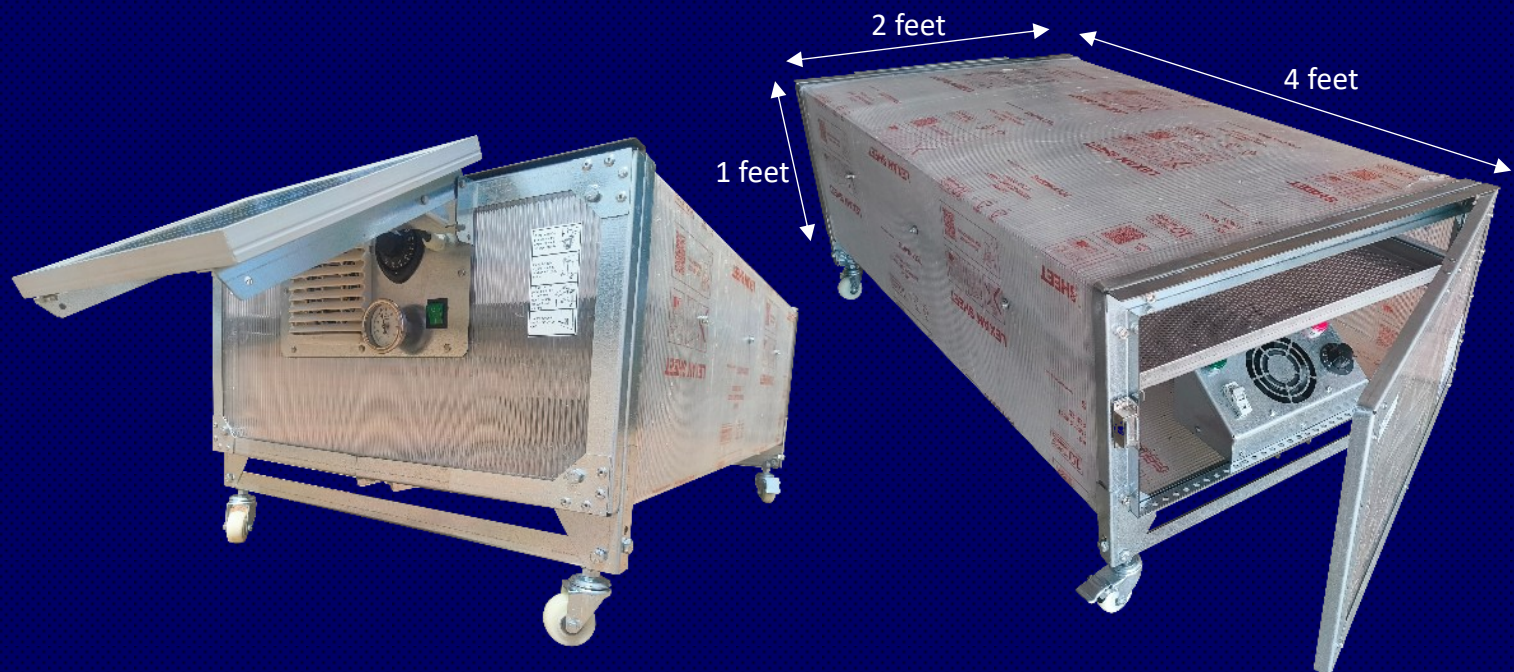

Specification



- ❖ SS 304 analogue bimetallic gauge for dryer temperature measurement. (0 -80 °C range)
- ❖ Capillary thermostat for temperature control inside dryer (30 – 60 °C range)
(turn exhaust fan ON at 2 °C above set temp. and OFF at 2 °C below set temp)



- ❖ SS 304 stainless steel food grade tray
- ❖ 42" x 22" x 1" x 0.8mm thick
- ❖ 5mm hole perforated sheet tray for better airflow
- ❖ 6.25 Sq. Ft tray drying area



- ❖ 12" AC 220v 500w electrical heater
- ❖ Capillary thermostat for heater temperature control inside dryer (30 – 60 °C range)
- ❖ 4" AC 220V air circulation fan
- ❖ 6A MCB for power ON & safety
- ❖ Indicator lights for visibility



- ❖ 10W 12v DC solar panel for exhaust fan
- ❖ 4" DC fan to exhaust the moist air
- ❖ Retractable panel mounting



- ❖ All sides covered with 6mm thick Double walled two side UV protected polycarbonate sheet
- ❖ Peelable protection film should be removed before first time use



- ❖ Laser cut and folded GI sheet frame assembled with bolt and nuts
- ❖ Rust free and long-life
- ❖ 2" Caster trolley wheels for easy mobility

Basic Cost

Rs: 18,000 /-

(including GST)




Additional Cost: (Including GST)




Two trays with increased box height (2ft)

Rs: 7,000 /-

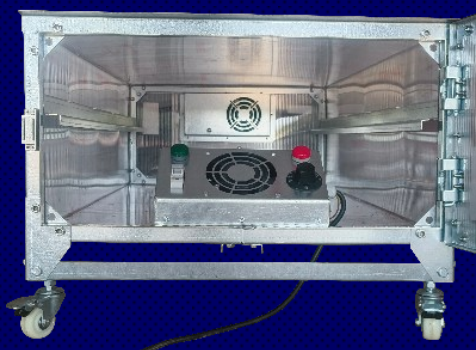

Electrical heater setup

Rs: 2,000 /-

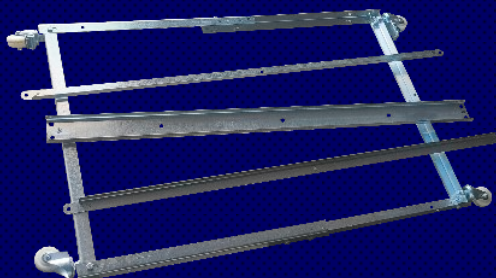

Extension Leg

Rs: 1,500 /-



Packaging

Rs: 2,500 /-

(Shipping 'TO PAY' basis in transport service)