
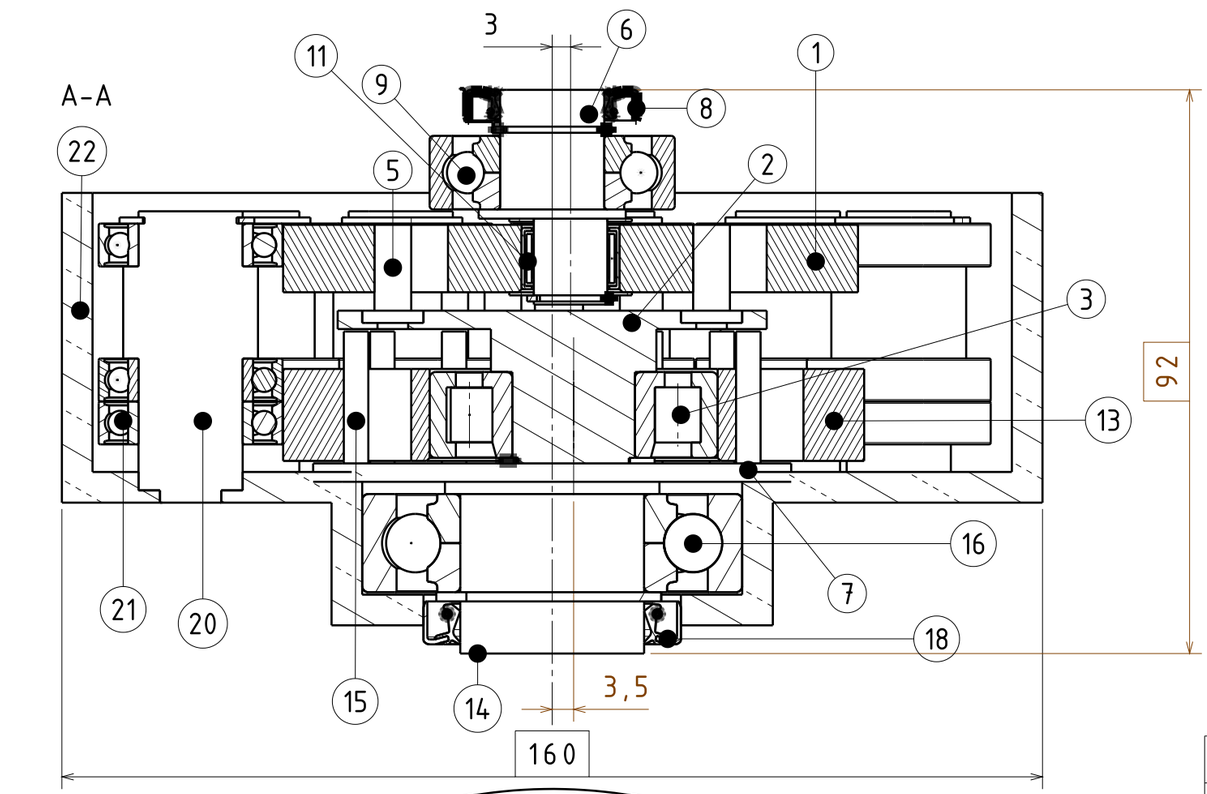


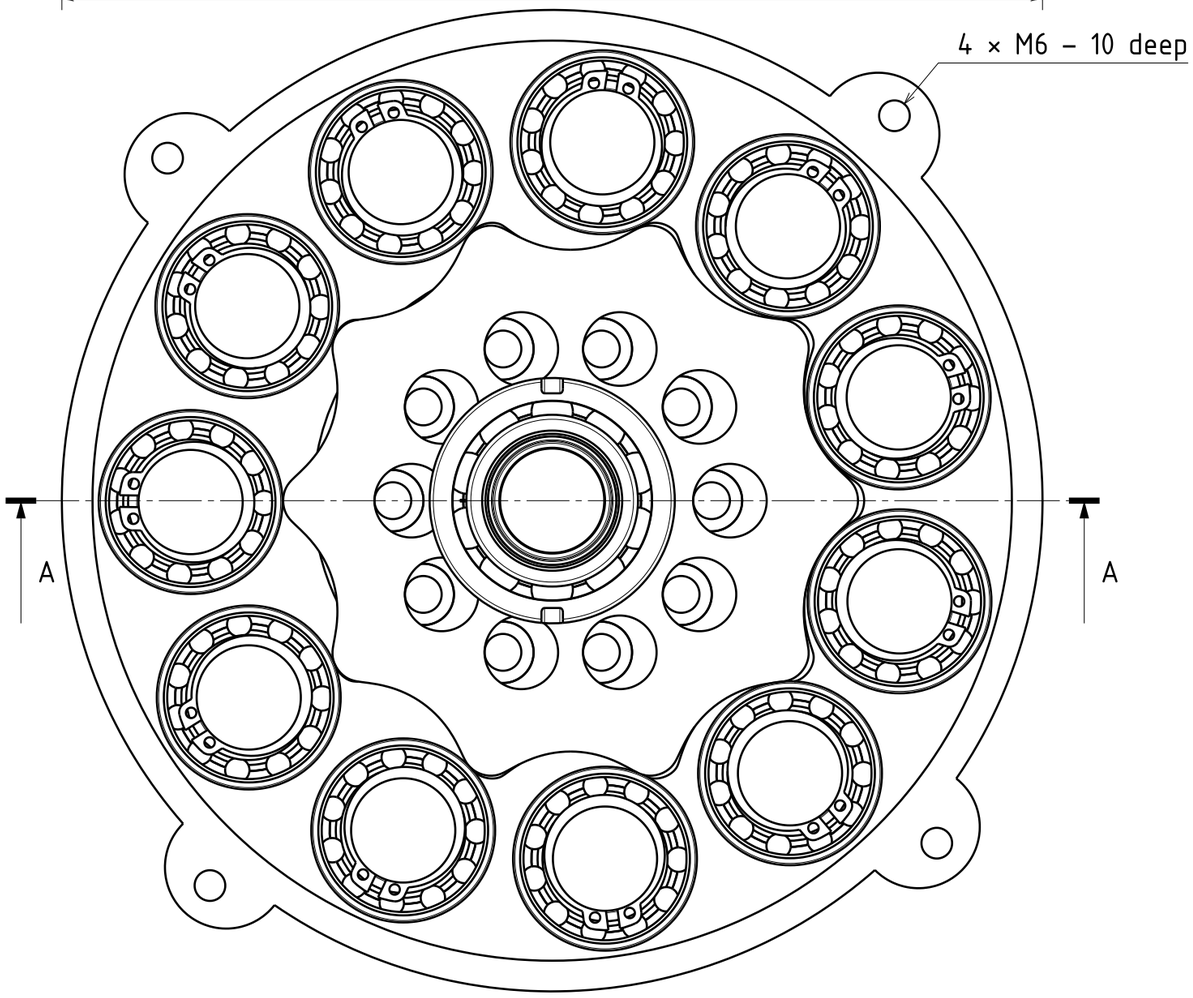

Top cover not shown for clarity. It carries the QJ 203 input bearing and the Ø17 lip seal, is centred on the housing bore and fixed by 4 × M6 screws.

Item	Qty	Title	Description
1	1	Cycloidal disc, stage 1	16MnCr5, case-hardened
2	1	Flask, stage 1 output	16MnCr5, case-hardened
3	1	Eccentric bearing, stage 2	SKF NJ 204 ECP
4	1	Retaining ring Ø20	DIN 471 – 20 × 1,2
5	10	Output pin, stage 1	Ø6, hardened steel
6	1	Input shaft	16MnCr5, case-hardened
7	12	Retaining ring Ø17	DIN 471 – 17 × 1
8	1	Lip seal Ø17	ISO 6194 – 17 × 28
9	1	Input bearing	SKF QJ 203 N2MA
10	1	Retaining ring Ø12	DIN 471 – 12 × 1
11	1	Eccentric bearing, stage 1	INA HK 1210
12	2	Thrust washer	Igus GTM 1220 005
13	1	Cycloidal disc, stage 2	16MnCr5, case-hardened
14	1	Output shaft	42CrMo4, quenched and tempered
15	12	Output pin, stage 2	Ø4, hardened steel
16	1	Output bearing	SKF QJ 206 N2MA
17	1	Retaining ring Ø30	DIN 471 – 30 × 1,5
18	1	Lip seal Ø30	ISO 6194 – 30 × 42
19	1	Annular pin plate	42CrMo4, quenched and tempered
20	11	Roller pin	42CrMo4, quenched and tempered
21	33	Roller bearing	SKF 61903
22	1	Housing	Aluminium 7075-T6