


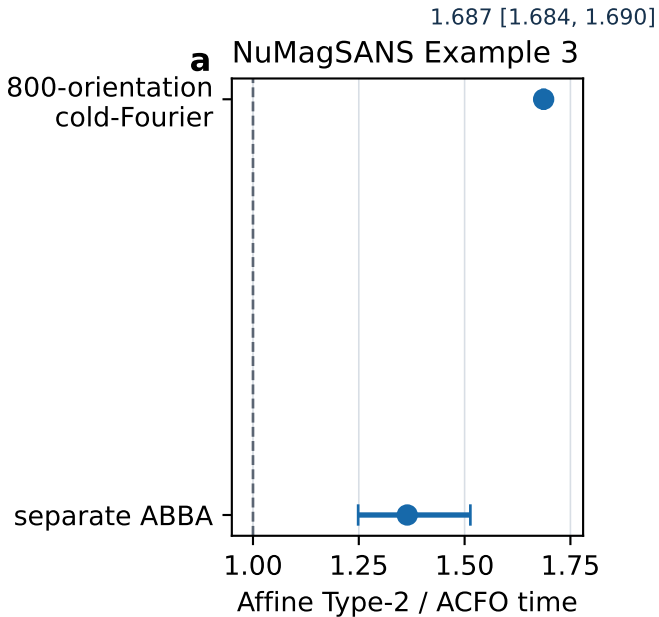

b Prespecified application workload

800 orientations

5 packing cases

4,224 occupied sites

999,000 targets

90 / 97 warm / cold crossover

Strongest eligible comparator: rotated-lattice affine Type-2