

Coating 135111

Magnetron sputtered system

$HR(0^\circ, 1020-1060\text{nm}) > 99\% + HR(0^\circ, 1450-2025\text{nm}) > 99.8\%$

$+ HR(0^\circ, 2025-2050\text{nm}) > 98\% + R(0^\circ, 2110-4000\text{nm}) < 5\%$ GDD optimiert

Goal: $HR(0^\circ, 1020-1060\text{nm}) > 99.5\%$

$\sim 2,5\%$ absorption losses @ 2700-2900nm

fig. 1 reflection, 0°

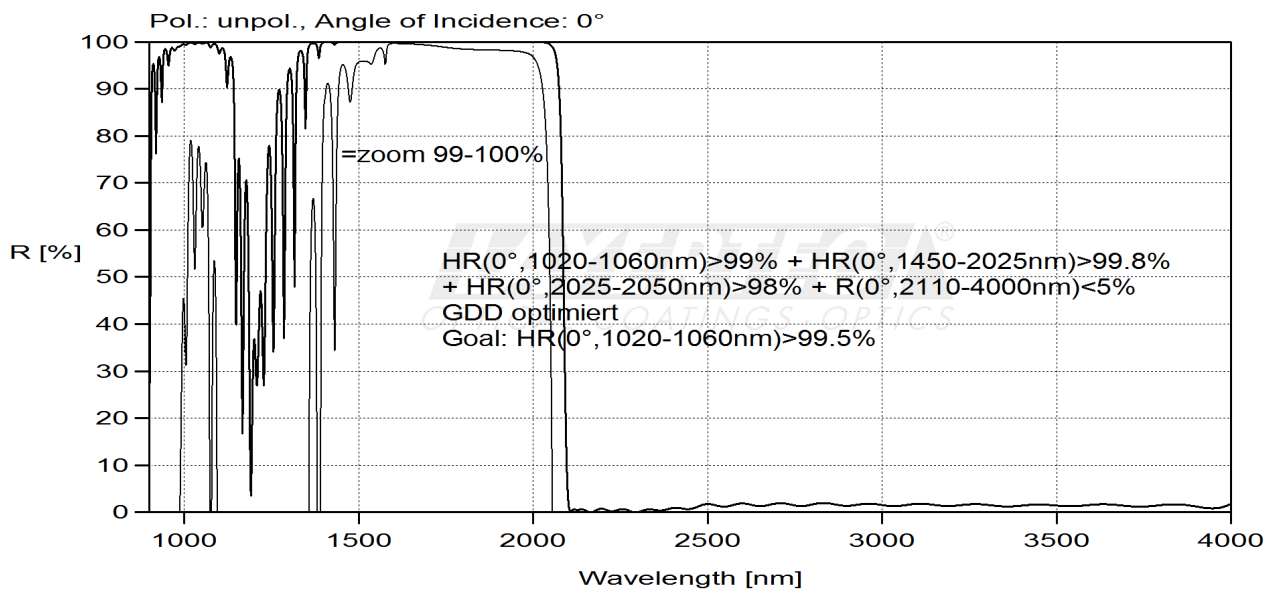


fig. 2 reflection, 0°

