



- 384×288 and 640×512 infrared detector
- Picatinny mount with quick and easy detach
- Well integrated with small size and low weight
- Low power consumption enables the extra-long working time
- Be suitable for the night-time outdoor and hunting adventure




SPECIFICATIONS

Models		TS2	TS3	TS6
Detector Type		VOx Uncooled Microbolometer		
Resolution		256×192	384×288	640×512
Spectral Range		8 μm ~ 14 μm		
Pitch Size		12 μm		
NETD/FPS		≤25mK@ 25°C, @ F/1.0 / 50Hz		
Lens Focal Length		19mmF1 (25mm F1 Optional)	35mm F1 (25mm F1,50mm F1 Optional)	
FOV & Magnification		9.2°×6.9°(19mm)/2.7× 7.0°×5.3°(25mm) /3.6×	10.5°×7.9°(25mm)/2.4× 7.5°×5.6°(35mm) /3.4× 5.3°×3.9°(50mm)/4.8×	12.5°×10°(35mm) /2.0× 8.8°×7°(50mm) /2.8×
Focusing		Manual		
Display		Monocular Color OLED, 0.39",1024×768,		
Diopter		-8~+3		
Exit pupil		38mm		
Detection distance	Upright adult	800m(19mm) / 1000m(25mm) / 1450m(35mm) / 2000m(50mm)		
	Med truck	1800m(19mm) / 2400m(25mm) / 3400m(35mm) / 4800m(50mm)		
Recognition distance	Upright adult	400m(19mm) / 500m(25mm) / 730m(35mm) / 1000m(50mm)		
	Med truck	900m(19mm) / 1200m(25mm) / 1700m(35mm) / 2400m(50mm)		
Image function		Pseudo-colors/ Digital Zoom(1×/2×/4×/8×)/ PIP/ Line of sights		
WIFI		Image transmission (Android and IOS) 、 Video display		
Power supply		CR123A Rechargeable lithium battery, 4 batteries		
Battery Life		≥ 4 h		
Memory		64G (512GB Max)		
Mounting Interface		Picatinny mount(Three segments adjustable)		
Weight		≤ 650g (Battery included)		
Language		Simplified Chinese / English		
Electrical interface		Type-C(Power supply, Cvbs output, Media management)		
Shock		≤1000g		
FFC Calibration		Yes		
DPC (Defective Pixel Correction)		Yes		
Optional Function (*)		Laser rangefinder (1.5km Max)		
Compass		Yes		

SPECIFICATIONS

Video & Audio recording	Yes
Zeroing	Yes
Hot Spot Track	Yes
Video Distance Measurement	Yes
Snapshot	Yes
Operating temperature	-20°C ~ + 55°C
Storage Temperature	-40°C ~ + 70°C
Protection Grade	IP66
Packaging Dimensions	L: 25 x W: 23 x L 10 CM (L: 9.84 x W: 9.06 x L 3.94 in)
Net Weight	≤1.28 kg (2.82 lb) (battery & mounting rails included)

Component instructions:

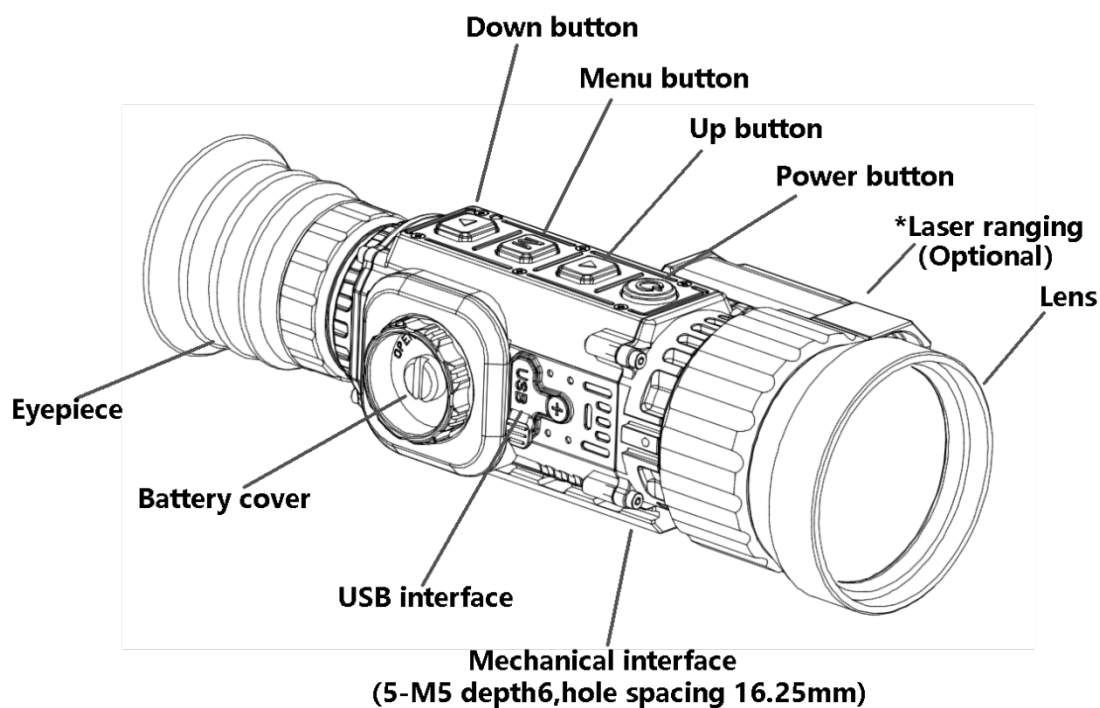

Attachments:

