Task 2.2, Case F

Magnus Wangen

June 2023

Task 2.2, Case F

number of cells in r-dir [-]	50
radius of surrounding rock [m]	250
mass flow rate [kg/s]	8.80149
temperature inlet [°C]	45
temperature surface [°C]	11
end-of-simulation [years]	10
first time-step [days]	1
maximum time-step [days]	100
time-step factor	1.2
use pipe feedback	1
enable analytical solution	1

Table: Main parameters.

Task 2.2, Case F

Name	fluid	rock	wall	casing
density (ϱ) [kg/m3]	H_2O	$2.6 \cdot 10^3$	250	$8 \cdot 10^3$
heat_cap (C_p) [J/kgK]	H_2O	902.67	300	466
heat_cond (λ) [W/mK]	H_2O	2.423	0.1	43.268

Table: Material properties.

Task 2.2, Case F

Segment	1	2
nz_cells (N_z) [-]	30	35
length (l) [m]	$3 \cdot 10^3$	$3.5 \cdot 10^3$
temp_diff (ΔT) [°C]	97.5	0
dr_tube (r_1) [m]	0.05	0.05
dr_wall (d_w) [m]	0.015	0.015
dr_annulus (d_a) [m]	0.01585	0.01585
dr_layer1 (d_1) [m]	0.00805	0.00805
dr_layer2 (d_2) [m]	0.01	0.01
dr_layer3 (d_3) [m]	0.01	0.01
dz_ds (dz/ds) [-]	-1	0
props_wall [-]	wall	wall
props_layer1 [-]	casing	casing
props_layer2 [-]	rock	rock
props_layer3 [-]	rock	rock
props_rock [-]	rock	rock

Table: Segment parameters.

Task 2.2, Case F

		r=0
inner tube (fluid)	dr=50 mm	r=50 mm (d=100 mm)
wall (wall)	dr=15 mm	r=65 mm (d=130 mm)
annulus (fluid)	dr=16 mm	r=81 mm (d=162 mm)
layer1 (casing)	dr=8 mm	r=89 mm (d=178 mm)
layer2 (rock)	dr=10 mm	r=99 mm (d=198 mm)
layer3 (rock)	dr=10 mm	r=109 mm (d=218 mm)
rock (rock)	dr=250 m	r=250 m (d=500 m)

Table: Well radii for segment 1.

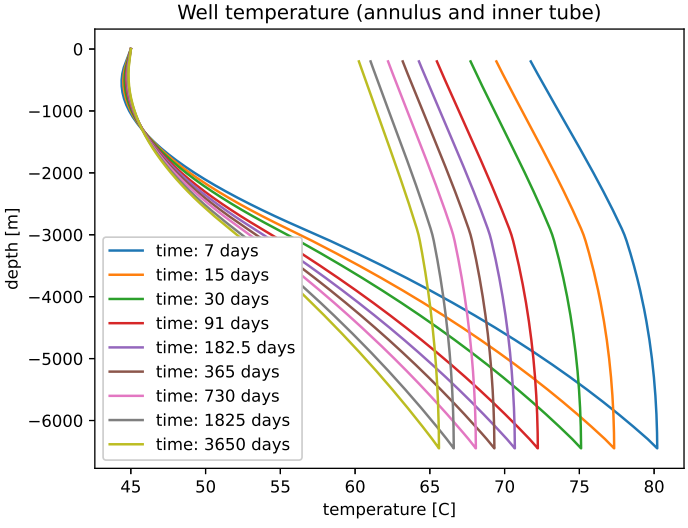

Task 2.2, Case F

Task 2.2, Case F

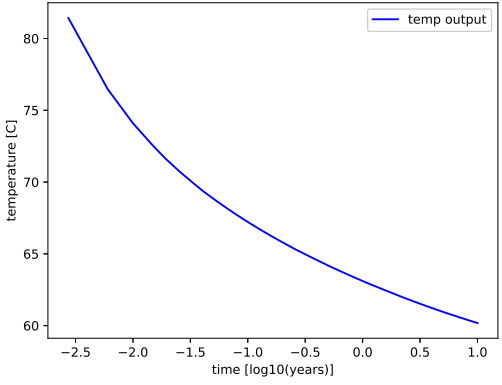

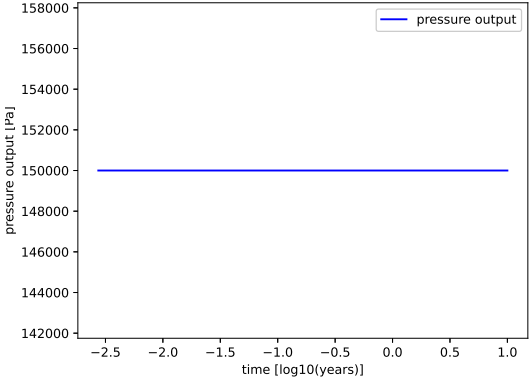
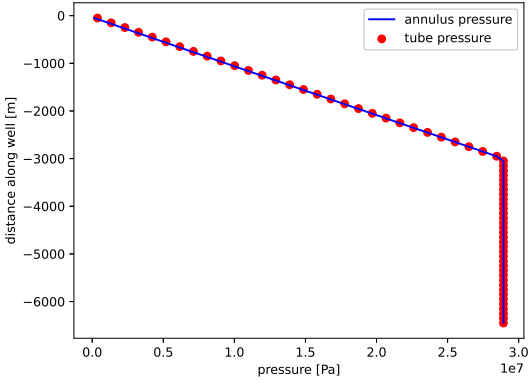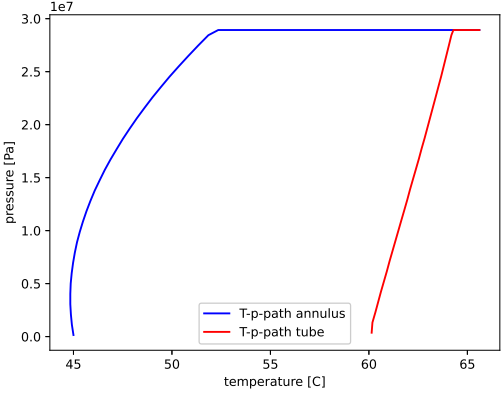
Task 2.2, Case F